

Assembly instruction  
**Roma II T5 IP**




**230V/50HZ T5**



**1. Dimensions**

Power [W]	L	A	H	Weight
<b>2x14/24</b>	596	296	88	4,2kg
<b>2x28/54</b>	1196	296	88	7kg
<b>4x14/24</b>	596	596	88	6,5kg
<b>3x28/54</b>	1196	596	88	12kg
<b>4x28/54 SH</b>	1196	596	105	18,3kg


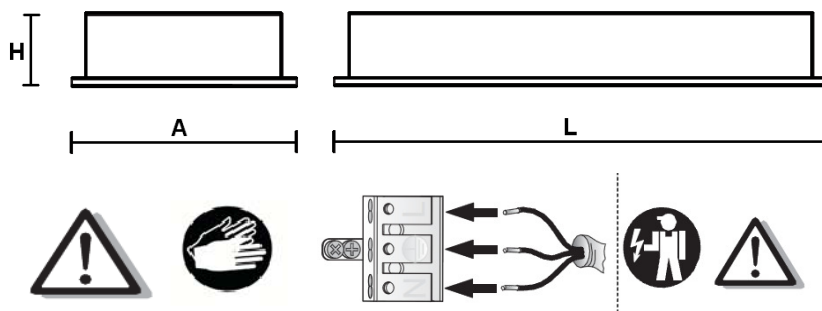


**2. Assembly**

- a) carefully take luminaire out of box and put it on a stable surface (floor or table)
- b) open the luminaire with a screwdriver
- c) connecting the power supply
  - put the gland seal into power supply hole in the bottom of the frame,
  - pull the feeding cable through the gland seal,
  - connect the wires as it's shown on a cube.
- d) put the luminaire on a ceiling frame
  - or fix it in a ceiling hole :
  - cut the hole of right dimensions (table above),
  - put the luminaire into hole and by twisting mounting screws draw out mounting handles, which will pull the frame to the ceiling while twisting (**4x28/54 version – suspension frame ceilings only**)
- e) hook up the frame's securing lines

Mounting hole dimensions:

Power [W]	X	Y
<b>2x14/24</b>	280	580
<b>2x28/54</b>	280	1180
<b>4x14/24</b>	580	580
<b>3x28/54</b>	580	1180

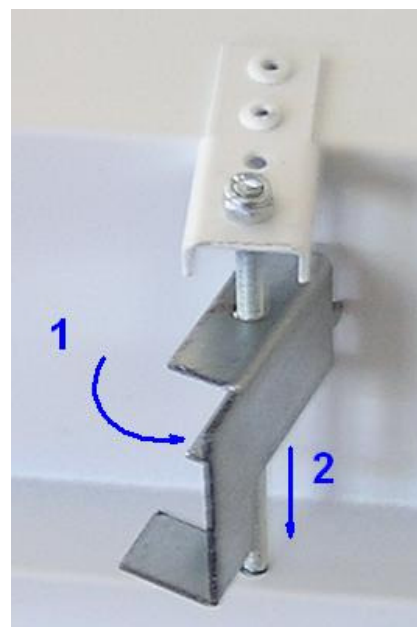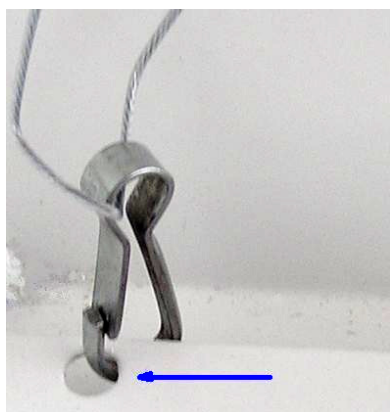

f) mounting the light source:

- slip the fluorescent lights of proper power into luminaire and delicately push it into the socket
- turn the fluorescent lights by 90 degrees

g) plug in frames grounding wire (if recently plugged out)

h) close the fixture by putting frame in and screwing the screws

### 3. Important warnings:

Do not install the fixtures in areas without an exchange of air.

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminary when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws resulting from not complying with recommendations included in this instruction manual.

Manufacturer reserves a right to change the construction of the product.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

