



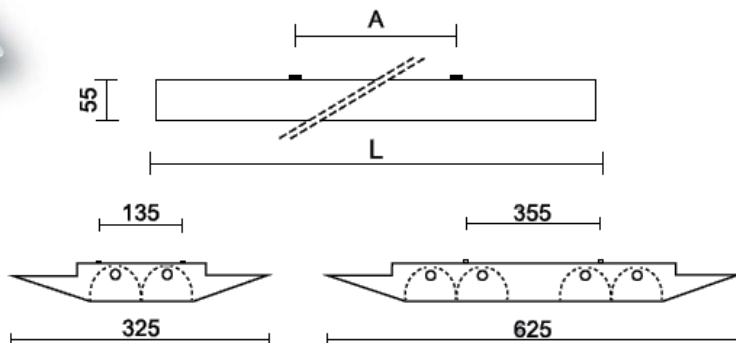

Installation manual  
**Capri T5**



230V/50HZ T5



**1. Dimensions**

Power[W]	L	A	X	Y	Weight
2x14W	625	355	280	580	2,5kg
2x21/39W	1225	960	280	1180	5kg
2x28/54W	925	660	280	880	4,5kg
2x35/49/80W	1525	1260	280	1480	5,5kg
3x14W	625	355	580	580	4,2kg
4x14/24W	625	355	580	580	4,2kg

X,Y – G/K mounting hole dimensions

**2. Assembly**

- a) carefully take luminaire out of box and put it on a stable surface (floor or table)
- b) using gloves take louvers out of luminaire
- c) connecting the power supply
  - put the power supply cable through the hole in the base of a luminaire
  - connect the wires as it's shown on a cube
- d) ceiling mounting
  - luminaire is designed to G/K or dropped ceiling
  - Dropped ceiling version:**
    - put the mounting strips on a panel
    - screw the luminaires on to the strips through 4 holes in its base
  - G/K version:**
    - cut the hole of right dimensions (table above)
    - put the mounting strips on a hole
    - screw the luminaires on to the strips through 4 holes in its base
- e) mounting the light source:
  - slip the fluorescent lamps of proper power into luminaire and delicately push it into the socket
  - turn the fluorescent lights by 90 degrees
- f) place grounding wire (green/yellow) on a louver
- i) put the louver back in to luminaire

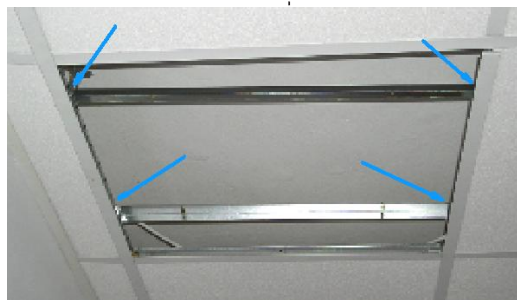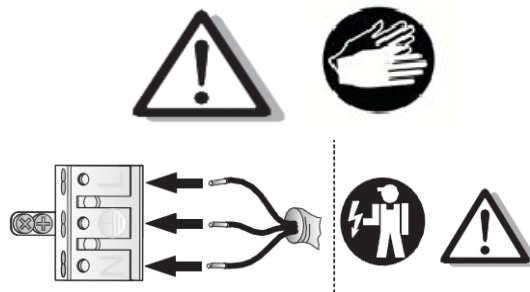

### 3. Important warnings:

Do not install the luminaires in areas without an exchange of air.

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminary when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws resulting from not complying with recommendations included in this instruction manual.

Manufacturer reserves a right to change the construction of the product.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

