

## Installation manual VIP MINI

VIP Mini




IP20



EL

230V/50HZ T5  
 LED

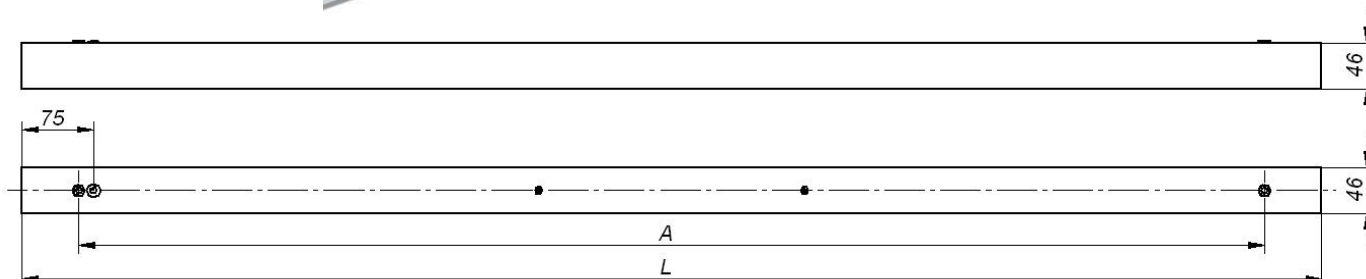

Power [W]	L [mm]	A [mm]	Weight [kg]
1x21/39 (T5)	1020	910	1,1
1x28/54 (T5)	1320	1210	1,6
1x35/49 (T5)	1620	1510	2,0
40 (LED)	1320	1210	2,0
50 (LED)	1620	1510	2,5

- turn off the power in the circuit where the fixture will be installed;
- pull the diffuser and flaps out of fixture;
- put the connector in the fixture (in case of installation of the lighting line);
- screw the line regulators in the set with electric suspension to the fixture (in case of suspended versions);
- pull the feeding cable through the hole in the base of a fixture;
- connect the feeding wires as shown on the cube;
- if the fixture is adjustable and has a emergency module connect it's wire to separate, dedicated cube;
- installation on the wall/on the ceiling:
  - installation on the ceiling:  
 connect the upper part of ceiling assembly to ceiling, screw the down part of ceiling assembly to fixture into bush control with a M8 screws;  
 - put the lower part of the assembly into upper part of the assembly and screw them with a two M4 screws;



installation on the wall:

- screw wall fixing to the wall with wall plugs,
- screw wall fixing to fixture in bush controls with a M8 screw;

suspended installation:

- screw universal suspension on to the ceiling;
- screw the electric suspension on to the ceiling;
- pull the lines through the line regulators and adjust.

i) installation of the lamps (does not apply to LED lighting source)

- slip the fluorescent lamps of proper power into the holders;
- rotate the lamp by 90 degrees holding it in the middle;
- put the diffuser and flaps in.

**Postanowienia końcowe:**

Podłączenie opraw do sieci mogą wykonywać tylko osoby odpowiednimi uprawnieniami.

Dokonywanie jakichkolwiek czynności wewnątrz oprawy przy włączonym zasilaniu grozi porażeniem elektrycznym.

Producent nie ponosi odpowiedzialności za wady wynikłe z niestosowania zaleceń niniejszej instrukcji.

Producent zastrzega sobie możliwość zmian konstrukcji produktu.

Nie instalować oprawy w pomieszczeniach pozbawionych obiegu powietrza.

Aby zachować bezpieczeństwo funkcjonowania oprawy, należy postępować zgodnie z instrukcją montażu.



Zgodnie z przepisami ustawy z dnia 29 lipca 2005r. o zużyтым sprzęcie elektrycznym i elektronicznym zabronione jest umieszczanie z innymi odpadami zużytego sprzętu oznakowanego symbolem przekreślonego kosza. Użytkownik, który zamierza pozbyć się produktu, jest obowiązany do oddania zużytego sprzętu elektrycznego lub elektronicznego do punktu zbierania zużytego sprzętu. Punkty zbierania prowadzone są między innymi przez sprzedawców hurtowych i detalicznych tego sprzętu, przez gminne jednostki organizacyjne prowadzące działalność z zakresie odbierania odpadów oraz organizacje odzysku. Powyższe obowiązki ustawowe wprowadzone zostały w celu ograniczenia ilości odpadów powstających ze zużytego sprzętu elektrycznego i elektronicznego oraz zapewnienia odpowiedniego poziomu zbierania, odzysku i recyklingu. Szczegóły ustawy znajdują się na stronie: <http://www.gios.gov.pl>

