


Installation manual  
**Roma IP65/Pisa IP65**



230V/50HZ T8



1. Dimensions

Power [W]	L R/P	A R/P	H R/P	Weight [kg] R/P
2x18	598/600	296/300	112/115	3,4/4,4
2x36	1191/1200	296/300	112/115	6,7/8,7
4x18	595/600	598/600	112/115	6,9/9,1
3x36 TL	595/600	598/600	112/115	6,2/8,4


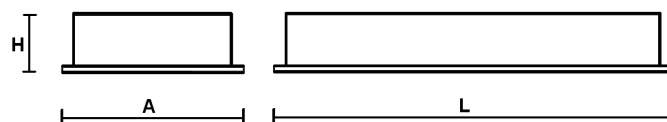


2. Assembly

- a) carefully take luminaire out of box and put it on a stable surface (floor or table)
- b) open luminaire with a screwdriver
- c) connecting the power supply
  - put the gland seal into power supply hole in the bottom of the frame,
  - pull the feeding cable through the gland seal,
  - connect the wires as it's shown on a cube.
- d) mounting the light source:
  - slip the fluorescent lamps of proper power in to luminaire and delicately push it in to the socket
  - turn the fluorescent lights by 90 degrees
- e) place green/yellow grounding wire on a louver
- f) hook up the frame's securing lines (Roma IP)
- g) push the frame in and screw it on to close the luminaire (Roma IP)
- h) put luminaire evenly on the rack (Roma IP)
- i) G/K mounting (Pisa IP) :
  - cut the hole of right dimensions (table above),
  - put the luminaire into hole and by twisting mounting screws draw out mounting handles, which will pull the frame to the ceiling while twisting,
  - push the frame in and screw it on to close the luminaire

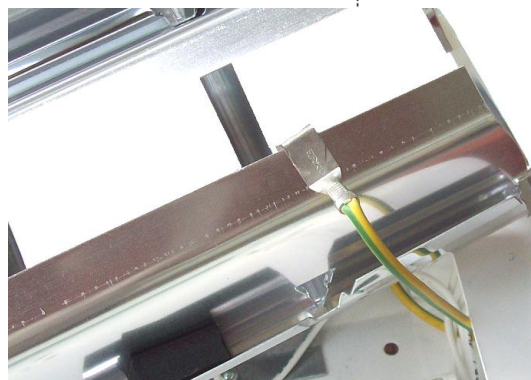

Power [W]	E	F
2x18	590	280
2x36	1180	280
4x18	585	580
3x36/55 TL	585	580

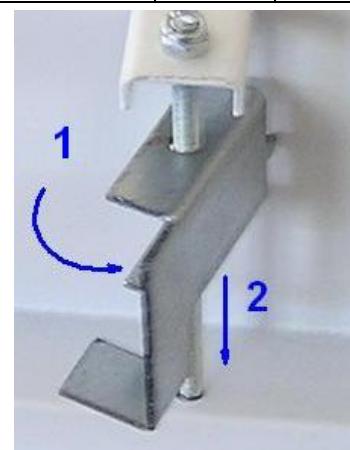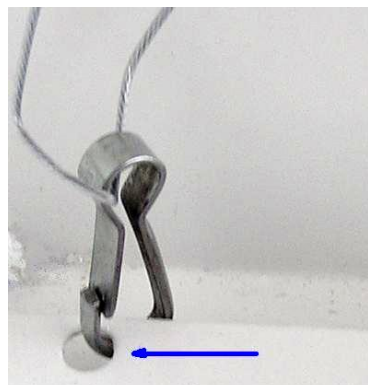

### 3. Important warnings:

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of luminaire functions, please assembly according to instruction.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law. More details of directive available at: <http://www.gios.gov.pl>

