

DECOSTAR 51 ECO 20 W 12 V 36° GU5.3

Kod produktu: 55772



Dane techniczne:

- Construction wattage [PICOS] **20.00 W**
- Claimed equiv. conventional lamp power **35 W**
- Nominal voltage **12 V**
- Nominal wattage **20.00 W**
- Rated useful luminous flux 90° **300 lm**
- Beam angle **36 °**
- Overall length **45.0 mm**
- Diameter **51.0 mm**
- Outer bulb **MR51**
- Order reference **48860 ECOWFL 20**
- Luminous intensity **1000 cd**
- Nominal useful luminous flux 90° **300 lm**
- Energy consumption **22 kWh/1000h**
- ILCOS **HRGS//UBIB-20-12-GU5.3-51/36**
- Power factor λ **1.00**
- Color temperature **3000 K**
- Light color as per EN 12464-1 **Warm White**
- Color rendering index Ra **100**
- Starting time **0.0 s**
- Warm-up time (60 %) **0.00 s**
- Length **46.0 mm**
- Maximum diameter **51.0 mm**
- Nominal lamp life time **5000 h**
- Rated lamp life time **5000 h**
- Number of switching cycles **125000**
- Lumen main.fact.at end of nom.life time **0.75**
- Base (standard designation) **GU5.3**
- Mercury-free **Yes**
- Lamp mercury content **0.0 mg**
- Dimmable **Yes**
- Burning position **Any**
- Energy efficiency class **B**

Product benefits


- Brilliant ECO accent lighting
- Significantly lower CO2 emissions
- Constant luminous intensity and constant color location throughout
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Contains no mercury

Areas of application

- General illumination
- Kitchen lighting
- Dining table lighting
- Mirror lighting
- Workplace lighting
- Shops
- Restaurants, hotels and similar prestigious applications

Product features

- Average life: 5,000 h
- Dimmable
- Color rendering index Ra: 100
- Color temperature: 3,000 K

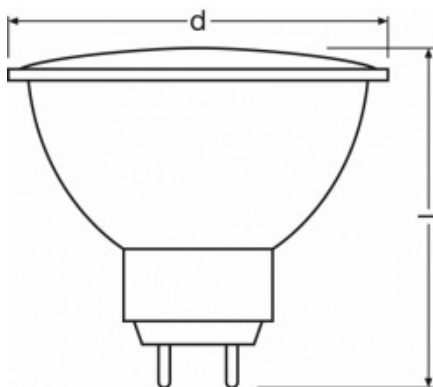

HALOGEN ECO

