

Installation manual
Roma

ROMA





IP20



230V/50HZ T8

1. Dimensions and weight

Power	L	Weight(kg)
2x18W	595	2,78
2x36W	1195	4,94
3x18W	595	4,7
4x18W	595	4,76
4x36W	1195	9,23

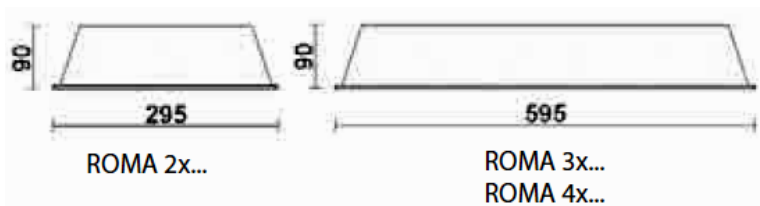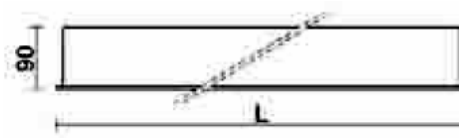

2. Assembly

a) remove carefully luminaire from packaging and put in safety place (table or floor)

b) using gloves remove louver or diffuser frame (frame version) from luminaire

c) for opal/prismatic version:


- remove protecting film from both side of diffuser and place it through the hole of module ceiling, then center (loose diffuser version)

d) power connection:

- put power cable through the hole in base of frame
- connect cables according to signs at power cube



e) fluorescent lamp mounting:

- put fluorescent lamp in the luminaire
- rotate fluorescent lamp 90°

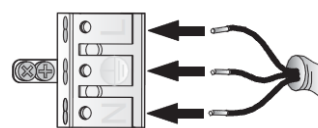


f) louver/frame version put springs into holes so both ends of springs are in one hole

Caution! During mounting the spring, press it by fingers in the middle.

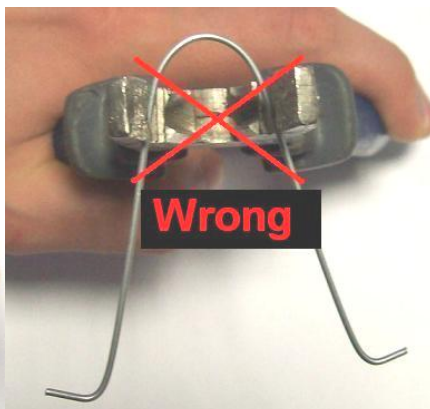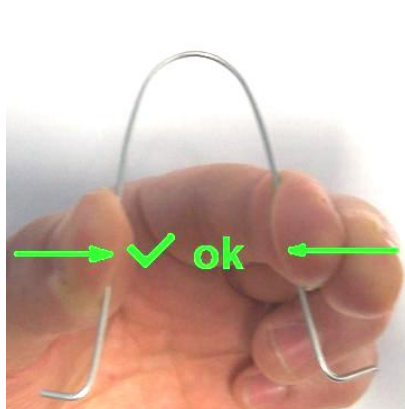

g) module ceiling suspension mounting:

- replace luminaire with mounted lights through next side hole in module ceiling
- place luminaire on housing (frame version) or diffuser (loose plate version)
- put cables in position which will not disturb mounting ceiling

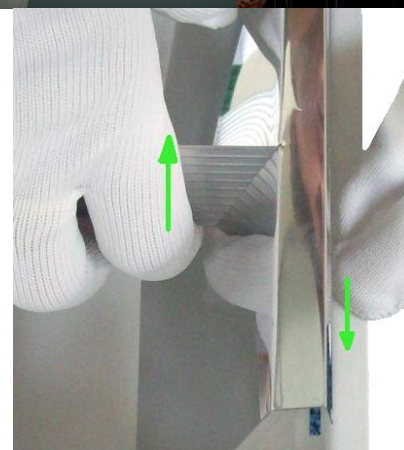

h) PAR and SLA louver demounting:

- grab the last crosspiece next to the luminaires edge
- use the second hand to support on the luminaires edge or ceilings slat
- slowly pull out the louver until spring resists
- press the spring as on the picture above
- repeat for every spring

CAUTION! Never take out the louver by pulling one of the middle crosspieces – louver may break because of it.

3. Important warnings:

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of luminaire functions, please assembly according to instruction.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law. More details of directive available at: <http://www.gios.gov.pl>

