

### PCA TC EXCEL one4all xitec II, 18 – 57 W EXCEL compact

#### Product description


- Processor-controlled ballast with xitec II inside
- Highest possible energy class CELMA EEI = A1 BAT<sup>®</sup>
- Noise-free precise control via DALI or DSI signal, switchDIM or corridorFUNCTION
- Nominal life up to 100,000 h (at ta 50 °C with a failure rate max. 0.2 % per 1,000 h)
- OEM-specific reserved memory areas
- Extended DALI commands
- 5-year guarantee

#### Interfaces

- DALI
- DSI
- switchDIM (with memory function + selectable dimming rate)
- corridorFUNCTION (3 preprogrammed profiles + individually programmable)
- Integrated SMART interface for function with all SMART Sensors and SMART plugs of the xitec II range

#### Functions

- Intelligent Temperature Guard (overtemperature protection)
- Intelligent Voltage Guard (overvoltage indication and undervoltage shutdown)
- Optimum filament heating in any dimmer setting
- Disconnection of filament heating from a dimming level of approx. 90 % for maximum energy efficiency (SMART-Heating concept)
- Fade rates between 100 ms and 90 s (min. – max.)
- corridorFUNCTION with ambient light control
- Automatically triggered emergency lighting value in DC mode 15 %, can be set between 3 and 100 %
- For emergency lighting systems as per EN 50172
- Automatic start after replacement of defective lamps
- Automatic shutdown if the lamp is faulty
- Dimming possible in DC mode

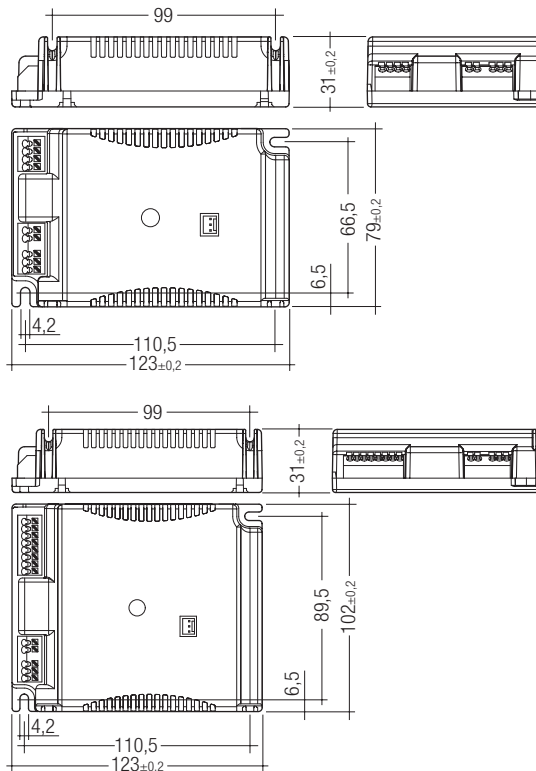

#### Technical data

Mains voltage range	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V (lamp start $\geq$ 198 V DC)
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
Typ. power input on standby	< 0.2 W
Protective hot restart	0.5 s for AC / 0.2 s for DC
Dimming range	3 – 100 %
Lamp start possible from	3 %
Operating frequency	$\sim$ 40 – 130 kHz
Type of protection	IP20



Standards, page 3

Wiring diagrams and installation examples, page 8

Ordering data

Type	Article number	Packaging, carton	Packaging, pallet	Weight per pc.
<b>For luminaires with 1 lamp</b>				
PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	10 pc(s).	500 pc(s).	0.201 kg
PCA 1x18 TC EXCEL one4all xrtec II	22185130	10 pc(s).	500 pc(s).	0.147 kg
PCA 1x18/24 TCL EXCEL one4all c xrtec II	22185251	10 pc(s).	500 pc(s).	0.147 kg
PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	10 pc(s).	500 pc(s).	0.163 kg
PCA 1x28 TC-DD EXCEL one4all xrtec II	22185254	10 pc(s).	500 pc(s).	0.147 kg
PCA 1x55 T5c EXCEL one4all xrtec II	22185132	10 pc(s).	500 pc(s).	0.162 kg
<b>For luminaires with 2 lamps</b>				
PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	10 pc(s).	500 pc(s).	0.144 kg
PCA 2x18 TC EXCEL one4all xrtec II	22185131	10 pc(s).	500 pc(s).	0.201 kg
PCA 2x18/24 TCL EXCEL one4all c xrtec II	22185257	10 pc(s).	500 pc(s).	0.203 kg
PCA 2x26/32/42 TC EXCEL one4all xrtec II	22185129	10 pc(s).	500 pc(s).	0.206 kg

Specific technical data

Lamp wattage	Lamp type	Type	Article number	Dimensions L x W x H	Lamp power <sup>®</sup>	Circuit power <sup>®</sup>	EEL	Current at 50 Hz 230 V <sup>®</sup>	λ at 50 Hz 230 V	tc point max.	Ambient temperature ta <sup>®</sup>
<b>For luminaires with 1 lamp</b>											
1 x 11 W	TC-SEL	PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	123 x 79 x 31 mm	11.0 W	12.5 W	A1	0.06 A	0.96	75 °C	-25 ... 70 °C
1 x 11 W	TC-TEL HE	PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	123 x 79 x 31 mm	11.5 W	13.0 W	A1	0.07 A	0.96	75 °C	-25 ... 70 °C
1 x 13 W	TC-DEL	PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	123 x 79 x 31 mm	12.5 W	13.5 W	A1 BAT	0.07 A	0.96	75 °C	-25 ... 70 °C
1 x 13 W	TC-TEL	PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	123 x 79 x 31 mm	12.5 W	14.0 W	A1 BAT	0.07 A	0.96	75 °C	-25 ... 70 °C
1 x 14 W	TC-TEL HE	PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	123 x 79 x 31 mm	14.5 W	16.0 W	A1 BAT	0.08 A	0.97	75 °C	-25 ... 70 °C
1 x 17 W	TC-TEL HE	PCA 1x11/13 TC EXCEL one4all xrtec II	22185134	123 x 79 x 31 mm	17.5 W	19.0 W	A1 BAT	0.09 A	0.98	75 °C	-25 ... 70 °C
1 x 18 W	TC-DEL	PCA 1x18 TC EXCEL one4all xrtec II	22185130	123 x 79 x 31 mm	16.5 W	19.0 W	A1 BAT	0.09 A	0.95	80 °C	-25 ... 70 °C
1 x 18 W	TC-TEL	PCA 1x18 TC EXCEL one4all xrtec II	22185130	123 x 79 x 31 mm	16.5 W	18.5 W	A1 BAT	0.09 A	0.95	80 °C	-25 ... 70 °C
1 x 18 W	TC-F	PCA 1x18/24 TCL EXCEL one4all c xrtec II	22185251	123 x 79 x 31 mm	15.0 W	18.5 W	A1 BAT	0.08 A	0.96	75 °C	-25 ... 65 °C
1 x 18 W	TC-L	PCA 1x18/24 TCL EXCEL one4all c xrtec II	22185251	123 x 79 x 31 mm	16.0 W	18.5 W	A1 BAT	0.08 A	0.96	75 °C	-25 ... 65 °C
1 x 22 W	T5c	PCA 1x18/24 TCL EXCEL one4all c xrtec II	22185251	123 x 79 x 31 mm	22.0 W	25.0 W	A1 BAT	0.11 A	0.98	75 °C	-25 ... 65 °C
1 x 24 W	TC-F	PCA 1x18/24 TCL EXCEL one4all c xrtec II	22185251	123 x 79 x 31 mm	20.0 W	24.5 W	A1 BAT	0.11 A	0.98	75 °C	-25 ... 65 °C
1 x 24 W	TC-L	PCA 1x18/24 TCL EXCEL one4all c xrtec II	22185251	123 x 79 x 31 mm	16.0 W	24.5 W	A1 BAT	0.12 A	0.98	75 °C	-25 ... 65 °C
1 x 26 W	TC-DEL	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	24.0 W	26.5 W	A1 BAT	0.13 A	0.95	75 °C	-25 ... 65 °C
1 x 26 W	TC-TEL	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	24.0 W	27.0 W	A1 BAT	0.13 A	0.95	75 °C	-25 ... 65 °C
1 x 32 W	TC-TEL	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	32.0 W	35.0 W	A1 BAT	0.15 A	0.96	75 °C	-25 ... 65 °C
1 x 40 W	T5c	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	40.0 W	43.0 W	A1 BAT	0.16 A	0.97	75 °C	-25 ... 65 °C
1 x 40 W	TC-L	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	40.0 W	43.0 W	A1 BAT	0.18 A	0.97	75 °C	-25 ... 65 °C
1 x 42 W	TC-TEL	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	42.0 W	44.0 W	A1 BAT	0.20 A	0.98	75 °C	-25 ... 65 °C
1 x 57 W	TC-TEL	PCA 1x26-57 TC EXCEL one4all xrtec II	22185128	123 x 79 x 31 mm	57.0 W	61.0 W	A1 BAT	0.24 A	0.98	75 °C	-25 ... 65 °C
1 x 28 W	TC-DD	PCA 1x28 TC-DD EXCEL one4all xrtec II	22185254	123 x 79 x 31 mm	26.5 W	27.5 W	A1 BAT	0.13 A	0.98	75 °C	-25 ... 65 °C
1 x 55 W	T5c	PCA 1x55 T5c EXCEL one4all xrtec II	22185132	123 x 79 x 31 mm	55.0 W	59.0 W	A1 BAT	0.26 A	0.98	70 °C	-25 ... 55 °C
<b>For luminaires with 2 lamps</b>											
2 x 11 W	TC-SEL	PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	123 x 102 x 31 mm	22.0 W	24.5 W	A1 BAT	0.11 A	0.96	70 °C	-25 ... 60 °C
2 x 11 W	TC-TEL HE	PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	123 x 102 x 31 mm	23.5 W	26.0 W	A1 BAT	0.12 A	0.96	70 °C	-25 ... 60 °C
2 x 13 W	TC-DEL	PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	123 x 102 x 31 mm	25.0 W	27.0 W	A1 BAT	0.12 A	0.96	70 °C	-25 ... 60 °C
2 x 13 W	TC-TEL	PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	123 x 102 x 31 mm	25.0 W	27.5 W	A1 BAT	0.12 A	0.96	70 °C	-25 ... 60 °C
2 x 14 W	TC-TEL HE	PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	123 x 102 x 31 mm	29.0 W	31.0 W	A1 BAT	0.15 A	0.97	70 °C	-25 ... 60 °C
2 x 17 W	TC-TEL HE	PCA 2x11/13 TC EXCEL one4all xrtec II	22185135	123 x 102 x 31 mm	35.0 W	37.5 W	A1 BAT	0.17 A	0.98	70 °C	-25 ... 60 °C
2 x 18 W	TC-DEL	PCA 2x18 TC EXCEL one4all xrtec II	22185131	123 x 102 x 31 mm	33.0 W	36.0 W	A1 BAT	0.17 A	0.97	75 °C	-25 ... 70 °C
2 x 18 W	TC-TEL	PCA 2x18 TC EXCEL one4all xrtec II	22185131	123 x 102 x 31 mm	33.0 W	36.0 W	A1 BAT	0.17 A	0.97	75 °C	-25 ... 70 °C
2 x 18 W	TC-F	PCA 2x18/24 TCL EXCEL one4all c xrtec II	22185257	123 x 102 x 31 mm	15.0 W	37.0 W	A1 BAT	0.15 A	0.96	75 °C	-25 ... 60 °C
2 x 18 W	TC-L	PCA 2x18/24 TCL EXCEL one4all c xrtec II	22185257	123 x 102 x 31 mm	16.0 W	37.0 W	A1 BAT	0.16 A	0.97	75 °C	-25 ... 60 °C
2 x 24 W	TC-F	PCA 2x18/24 TCL EXCEL one4all c xrtec II	22185257	123 x 102 x 31 mm	20.0 W	48.0 W	A1 BAT	0.21 A	0.98	75 °C	-25 ... 60 °C
2 x 24 W	TC-L	PCA 2x18/24 TCL EXCEL one4all c xrtec II	22185257	123 x 102 x 31 mm	22.0 W	48.0 W	A1 BAT	0.24 A	0.98	75 °C	-25 ... 60 °C
2 x 26 W	TC-DEL	PCA 2x26/32/42 TC EXCEL one4all xrtec II	22185129	123 x 102 x 31 mm	48.0 W	52.0 W	A1 BAT	0.24 A	0.96	75 °C	-25 ... 60 °C
2 x 26 W	TC-TEL	PCA 2x26/32/42 TC EXCEL one4all xrtec II	22185129	123 x 102 x 31 mm	48.0 W	52.0 W	A1 BAT	0.24 A	0.96	75 °C	-25 ... 60 °C
2 x 32 W	TC-TEL	PCA 2x26/32/42 TC EXCEL one4all xrtec II	22185129	123 x 102 x 31 mm	64.0 W	68.0 W	A1 BAT	0.29 A	0.97	75 °C	-25 ... 60 °C
2 x 42 W	TC-TEL	PCA 2x26/32/42 TC EXCEL one4all xrtec II	22185129	123 x 102 x 31 mm	84.0 W	88.5 W	A1 BAT	0.39 A	0.98	75 °C	-25 ... 60 °C

<sup>®</sup> According to the EU directives on ecodesign requirements (EC) No. 245/2009 and (EC) No. 347/2010.

<sup>®</sup> Valid at 100 % dimming level.

<sup>®</sup> +10 °C to ta max: unrestricted dimming. -25 °C to +10 °C: unrestricted dimming from 100 % to 30 %.

-25 °C to +10 °C, dimming below 30 %: malfunction possible but no damage to ECG. This applies to AC and DC operation.

## Standards

EN 55015  
EN 60929  
EN 61000-3-2  
EN 61347-2-3  
EN 61547  
Suitable for emergency installations according to EN 50172  
CISPR 15  
CISPR 22  
IEC 60929  
IEC 61000-3-2  
IEC 61347-2-3  
IEC 61547  
IEC 62386 (according to DALI standard V1)

## Lamp starting characteristics

Warm start  
Starting time 0.5 s with AC  
Starting time 0.2 s with DC  
Start at any dimming level

## AC operation

Mains voltage  
220–240 V 50/60 Hz  
198–264 V 50/60 Hz including safety tolerance ( $\pm 10\%$ )  
198–254 V 50/60 Hz including performance tolerance ( $+6\% / -8\%$ )

## DC operation

220–240 V 0 Hz  
198–254 V 0 Hz certain lamp start  
176–280 V 0 Hz operating range  
Use in emergency lighting installations according to EN 50172 or for emergency luminaires according to EN 61347-2-3 appendix J.

## Light output level in DC operation

Programmable from 3 % to 100 %  
Programming by extended DSI or DALI signal (16 bit).  
Default value is 15 %  
In DC operation dimming mode can be activated.

## Emergency units

The "PCA TC EXCEL one4all xtec II" ballasts are compatible with all emergency units from Tridonic. See the table in the data sheet. Also all "5-pole" emergency units can be used. When used with other emergency units tests are necessary.

## Temperature range

Unlimited dimming range from 10 °C bis  $t_a$  max.  
-25 °C bis 10 °C: unlimited dimming from 100 % to 30 %.  
-25 °C bis 10 °C, dimming below 30 %:  
malfunction possible, but no electronic ballast damage.  
This applies to AC and DC operation.

## Mains currents in DC operation (at 15 % light output)

Type	Lamp type	Wattage	Mains current at	
			$U_n = 220 V_{oc}$	$U_n = 275 V_{oc}$
PCA 1x11/13 TC EXCEL one4all xtec II	TC-SEL	1 x 11 W	0.04 A	0.03 A
	TC-TEL HE	1 x 11 W	0.04 A	0.03 A
	TC-DEL	1 x 13 W	0.04 A	0.03 A
	TC-TEL	1 x 13 W	0.04 A	0.03 A
	TC-TEL HE	1 x 14 W	0.04 A	0.04 A
PCA 1x18 TC EXCEL one4all xtec II	TC-TEL HE	1 x 17 W	0.04 A	0.04 A
	TC-DEL	1 x 18 W	0.05 A	0.04 A
	TC-TEL	1 x 18 W	0.04 A	0.04 A
PCA 1x18/24 TCL EXCEL one4all c xtec II	TC-F	1 x 18 W	0.04 A	0.04 A
	TC-L	1 x 18 W	0.04 A	0.04 A
	T5c	1 x 22 W	0.06 A	0.05 A
PCA 1x18/24 TCL EXCEL one4all c xtec II	TC-F	1 x 24 W	0.05 A	0.04 A
	TC-L	1 x 24 W	0.05 A	0.05 A
	TC-DEL	1 x 26 W	0.06 A	0.05 A
PCA 1x26-57 TC EXCEL one4all xtec II	TC-TEL	1 x 26 W	0.06 A	0.05 A
	TC-TEL	1 x 32 W	0.06 A	0.06 A
	T5c	1 x 40 W	0.07 A	0.06 A
PCA 1x26-57 TC EXCEL one4all xtec II	TC-L	1 x 40 W	0.07 A	0.07 A
	TC-TEL	1 x 42 W	0.07 A	0.07 A
	TC-TEL	1 x 57 W	0.09 A	0.08 A
PCA 1x28 TC-DD EXCEL one4all xtec II	TC-DD	1 x 28 W	0.06 A	0.05 A
PCA 1x55 T5c EXCEL one4all xtec II	T5c	1 x 55 W	0.10 A	0.09 A
	TC-SEL	2 x 11 W	0.05 A	0.05 A
PCA 2x11/13 TC EXCEL one4all xtec II	TC-TEL HE	2 x 11 W	0.06 A	0.05 A
	TC-DEL	2 x 13 W	0.06 A	0.05 A
	TC-TEL	2 x 13 W	0.06 A	0.05 A
	TC-TEL HE	2 x 14 W	0.06 A	0.06 A
	TC-TEL HE	2 x 17 W	0.07 A	0.06 A
PCA 2x18 TC EXCEL one4all xtec II	TC-DEL	2 x 18 W	0.07 A	0.07 A
	TC-TEL	2 x 18 W	0.07 A	0.06 A
PCA 2x18/24 TCL EXCEL one4all c xtec II	TC-F	2 x 18 W	0.07 A	0.05 A
	TC-L	2 x 18 W	0.07 A	0.06 A
	TC-F	2 x 24 W	0.09 A	0.07 A
PCA 2x18/24 TCL EXCEL one4all c xtec II	TC-L	2 x 24 W	0.04 A	0.07 A
	TC-DEL	2 x 26 W	0.12 A	0.09 A
	TC-TEL	2 x 26 W	0.10 A	0.09 A
PCA 2x26/32/42 TC EXCEL one4all xtec II	TC-TEL	2 x 32 W	0.11 A	0.10 A
	TC-TEL	2 x 42 W	0.12 A	0.11 A

Ballast lumen factor AC operation (AC-BLF) EN 60929 8.1

Type	Lamp type	Wattage	AC-BLF at U = 230 V <sub>AC</sub>
PCA 1x11/13 TC EXCEL one4all xrtec II	TC-SEL	1 x 11 W	1.04
	TC-TEL HE	1 x 11 W	1.05
	TC-DEL	1 x 13 W	1.00
	TC-TEL	1 x 13 W	0.99
	TC-TEL HE	1 x 14 W	1.05
	TC-TEL HE	1 x 17 W	1.06
PCA 1x18 TC EXCEL one4all xrtec II	TC-DEL	1 x 18 W	1.02
	TC-TEL	1 x 18 W	1.03
PCA 1x18/24 TCL EXCEL one4all c xrtec II	TC-F	1 x 18 W	0.97
	TC-L	1 x 18 W	0.97
	T5c	1 x 22 W	1.03
	TC-F	1 x 24 W	1.03
	TC-L	1 x 24 W	1.03
PCA 1x26-57 TC EXCEL one4all xrtec II	TC-DEL	1 x 26 W	1.00
	TC-TEL	1 x 26 W	1.02
	TC-TEL	1 x 32 W	0.98
	T5c	1 x 40 W	0.96
	TC-L	1 x 40 W	0.96
	TC-TEL	1 x 42 W	1.00
PCA 1x28 TC-DD EXCEL one4all xrtec II	TC-DEL	1 x 28 W	1.01
	TC-TEL	1 x 28 W	1.01
PCA 1x55 T5c EXCEL one4all xrtec II	T5c	1 x 55 W	1.00
	TC-SEL	2 x 11 W	1.04
PCA 2x11/13 TC EXCEL one4all xrtec II	TC-TEL HE	2 x 11 W	1.04
	TC-DEL	2 x 13 W	0.99
	TC-TEL	2 x 13 W	0.98
	TC-TEL HE	2 x 14 W	1.04
	TC-TEL HE	2 x 17 W	1.04
	TC-DEL	2 x 18 W	1.01
PCA 2x18 TC EXCEL one4all xrtec II	TC-TEL	2 x 18 W	1.03
	TC-F	2 x 18 W	0.94
PCA 2x18/24 TCL EXCEL one4all c xrtec II	TC-L	2 x 18 W	0.94
	TC-F	2 x 24 W	1.03
	TC-L	2 x 24 W	1.03
PCA 2x26/32/42 TC EXCEL one4all xrtec II	TC-DEL	2 x 26 W	1.00
	TC-TEL	2 x 26 W	1.01
	TC-TEL	2 x 32 W	0.97
	TC-TEL	2 x 42 W	0.99

The ballast lumen factor for AC operation (AC-BLF) does not alter from  $U_n = 198 \text{ V}_{AC}$  to  $U_n = 254 \text{ V}_{AC}$ .  
The ballast lumen factor for DC operation (DC-BLF) on the basis of an automatic power reduction of the ballasts (default value is 15%) will be smaller than AC. It does not alter in the DC operating range (198–264 V<sub>DC</sub>).

## Dimming

Dimming curve is adapted to the eye sensitiveness.

Dimming range 3 % to 100 %

Digital control with:

- DSI signal: 8 bit Manchester Code  
Speed 3 % to 100 % in 1,16 s
- DALI signal: 16 bit Manchester Code  
Maximum speed 3 % to 100 % in 550 ms  
(adjustable between 100 ms and 90 s)  
Programmable parameter:  
Minimum dimming level  
Maximum dimming level  
Default minimum = 3 %  
Default maximum = 100 %

## Control input (DA/D1, DA/D2)

Digital DSI signal, push-to-make switch (switchDIM) or the digital control signal DALI/DSI can be wired on the same terminals (DA/D1 and DA/D2).

## Digital signal DALI/DSI

The control input is non-polar and protected against accidental connection with a mains voltage up to 264 V. The control signal is not SELV. Control cable has to be installed in accordance to the requirements of low voltage installations.

Different functions depending on each module.

## SMART interface

An additional interface for the direct connection of the SMART-Sensoren or SMART-Plugs.

For precise instructions relating to the available sensors and plugs and for a description of how they work in connection with the PCA devices please see the separate documentation for PCA xitec II.

The equipment must be installed in accordance with the relevant directives on low voltage. Ensure that power to the ballast is switched off before connecting or disconnecting the sensors and plugs.

## switchDIM

Integrated switchDIM function allows a direct connection of a push to make switch for dimming and switching.

Brief push (< 0.6 s) switches ballast ON and OFF. The ballasts switch-ON at light level set at switch-OFF. After switch ON the last settet dimming level will be activated again.

When the push to make switch is held, PCA ballasts are dimmed. After repush the PCA is dimmed in the opposite direction.

The switchDIM fade time is set to 3 s from min. to max. in the factory settings. With a 20 s push to the push to make switch this fade time can be changed to 6 s. In this instance the switchDIM application will be synchronized to 50 % light level after 10 s and after 20 s the light level rises to 100 % with the new fade time.


At every synchronisation (10 s keystroke) the device will reset to 3 s (factory setting)

In installations with PCAs with different dimming levels or opposite dimming directions (e.g. after a system extension), all PCAs can be synchronized to 50 % dimming level by a 10 s push.

Use of push to make switch with indicator lamp is not permitted.


switchDIM and corridorFUNCTION are very simple tools for controlling ballasts with conventional momentary-action switches or motion sensors. To ensure correct operation a sinusoidal mains voltage with a frequency of 50 Hz or 60 Hz is required at the control input.

## Dimming characteristics PCA TC EXCEL one4all xitec II

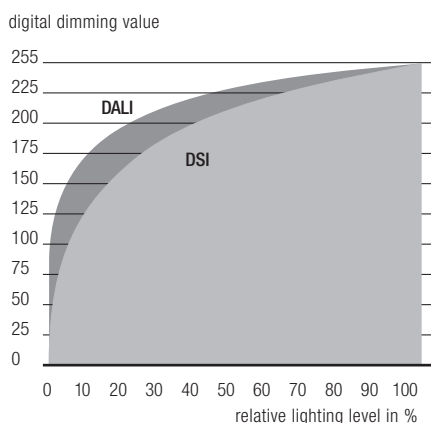

Dimming characteristics as seen by the human eye

## Energy saving PCA TC EXCEL one4all xitec II

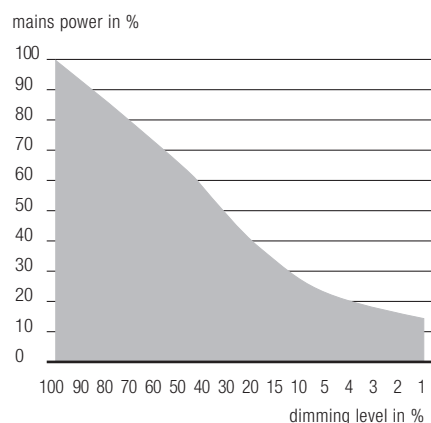

Special attention must be paid to achieving clear zero crossings. Serious mains faults may impair the operation of switchDIM and corridorFUNCTION.

## corridorFUNCTION


To activate the corridorFUNCTION a voltage of 230 V simply has to be applied for five minutes at switchDIM connection. The unit will then switch automatically to the corridorFUNCTION.

Note: If the corridorFUNCTION is wrongly activated in a switchDIM system (for example a switch is used instead of pushbutton), there is the option of installing a pushbutton and deactivating the corridorFUNCTION mode by five short pushes of the button within three seconds.


The corridorFUNCTION offers the added benefit of a second and third preprogrammed profile, which can be activated by the SMART-Plugs.

It is also possible to combine the corridorFUNCTION with the SMART-Sensor 5D 19f light sensor.


Application and functionality of profiles see user manual of the PCA xitec II.

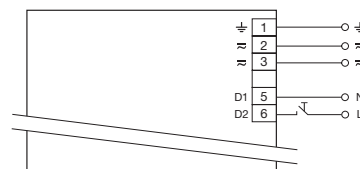


switchDIM PCA TC EXCEL one4all xitec II

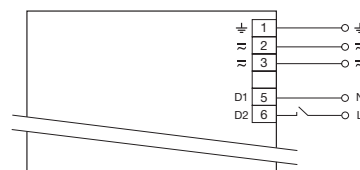

corridorFUNCTION PCA TC EXCEL one4all xitec II

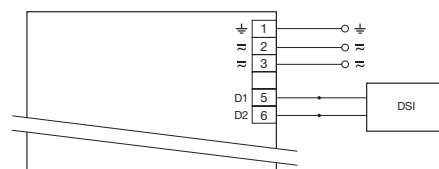

DSI PCA TC EXCEL one4all xitec II

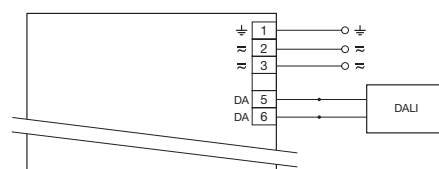

DALI PCA TC EXCEL one4all xitec II

**Loading of automatic circuit breakers (Limitation via inrush current)**

Automatic circuit breaker type	C10		C13		C16		C20		B10		B13		B16		B20		Inrush current (1.5 mm <sup>2</sup> )		Inrush current (2.5 mm <sup>2</sup> )	
	Installation Ø	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	2.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	1.5 mm <sup>2</sup>	I <sub>max</sub>	time	I <sub>max</sub>	time
PCA 1x11/13 TC EXCEL one4all xtec II	50	84	210	230	25	42	105	115	21.7 A	152 µs	21.3 A	157 µs								
PCA 1x18 TC EXCEL one4all xtec II	44	76	80	80	22	38	40	40	24.6 A	147 µs	24.5 A	150 µs								
PCA 1x18/24 TCL EXCEL one4all c xtec II	50	82	110	137	25	41	110	116	14.7 A	206 µs	15.6 A	199 µs								
PCA 1x26-57 TC EXCEL one4all xtec II	22	32	46	52	11	16	23	26	27.7 A	232 µs	30.4 A	213 µs								
PCA 1x28 TC-DD EXCEL one4all xtec II	50	84	105	132	25	42	105	118	16.4 A	189 µs	18.8 A	172 µs								
PCA 1x55 T5c EXCEL one4all xtec II	22	32	44	50	11	16	22	25	26.8 A	240 µs	27.5 A	235 µs								
PCA 2x11/13 TC EXCEL one4all xtec II	34	50	76	84	17	25	38	42	23.0 A	189 µs	23.7 A	186 µs								
PCA 2x18 TC EXCEL one4all xtec II	32	50	76	80	16	25	38	40	24.5 A	181 µs	29.7 A	145 µs								
PCA 2x18/24 TCL EXCEL one4all c xtec II	20	30	42	48	10	15	21	24	25.2 A	255 µs	27.2 A	245 µs								
PCA 2x26/32/42 TC EXCEL one4all xtec II	14	20	28	32	7	10	14	16	34.2 A	248 µs	36.4 A	242 µs								

Continuous operation: to calculate the protective safety switch see main current, page 2

**Intelligent Voltage Guard**

Intelligent Voltage Guard is the name of the electronic monitor from Tridonic. This innovative feature of the PCA family of control gear from Tridonic immediately shows if the mains voltage rises above certain thresholds. Measures can then be taken quickly to prevent damage to the control gear.

- If the mains voltage rises above approx. 318 V<sub>rms</sub> (voltage depends on the ballast type), the lamp starts flashing on and off.
- To avoid a damage of the device the mains supply has to be switched off at this signal.

**Intelligent Temperature Guard**

The intelligent temperature guard protects the PCA TC EXCEL one4all xtec II from thermal overheating by reducing the output power or switching off in case of operation above the thermal limits of the luminaire or ballast. Depending on the luminaire design, the ITG operates at about 5 to 10 °C above tc temperature.

**Harmonic distortion in the mains supply (at 230V/50 Hz)**

Type	Lamp type	Wattage	THD	3	5	7	9	11
PCA 1x11/13 TC EXCEL one4all xtec II	TC-SEL	1x11 W	10	4	3	2	2	2
	TC-TEL HE	1x11 W	10	4	2	2	2	2
	TC-DEL	1x13 W	10	4	3	2	2	2
	TC-TEL	1x13 W	10	4	3	2	2	2
	TC-TEL HE	1x14 W	9	5	2	1	1	1
	TC-TEL HE	1x17 W	8	5	1	1	1	1
PCA 1x18 TC EXCEL one4all xtec II	TC-DEL	1x18 W	9	7	1	2	2	2
	TC-DEL	1x18 W	9	7	2	2	2	2
	TC-F	1x18 W	10	4	2	2	2	2
PCA 1x18/24 TCL EXCEL one4all c xtec II	TC-L	1x18 W	9	4	2	2	2	2
	T5c	1x22 W	8	4	1	1	1	1
	TC-F	1x24 W	8	4	1	1	1	1
	TC-L	1x24 W	7	4	1	1	1	1
PCA 1x26-57 TC EXCEL one4all xtec II	TC-DEL	1x26 W	10	6	3	3	3	3
	TC-TEL	1x26 W	10	5	2	3	2	2
	TC-TEL	1x32 W	9	6	2	2	2	2
	T5c	1x40 W	9	6	2	2	2	2
	TC-L	1x40 W	9	6	2	1	2	2
	TC-TEL	1x42 W	7	5	2	1	1	1
PCA 1x28 TC-DD EXCEL one4all xtec II	TC-TEL	1x57 W	7	6	1	1	1	1
	TC-DD	1x28 W	9	6	2	1	1	1
	T5c	1x55 W	8	4	2	2	2	1
	TC-SEL	2x11 W	10	4	4	2	2	2
PCA 2x11/13 TC EXCEL one4all xtec II	TC-TEL HE	2x11 W	10	4	4	2	2	2
	TC-DEL	2x13 W	10	4	4	2	2	2
	TC-TEL	2x13 W	10	4	4	3	2	2
	TC-TEL HE	2x14 W	8	4	3	2	2	1
	TC-TEL HE	2x17 W	8	5	2	1	1	1
	TC-DEL	2x18 W	9	6	2	1	1	1
PCA 2x18 TC EXCEL one4all xtec II	TC-TEL	2x18 W	9	6	1	1	1	1
	TC-F	2x18 W	9	5	1	2	2	2
	TC-L	2x18 W	9	5	1	1	2	2
PCA 2x18/24 TCL EXCEL one4all c xtec II	TC-F	2x24 W	7	5	1	1	1	1
	TC-L	2x24 W	7	5	1	1	1	1
	TC-DEL	2x26 W	10	6	3	3	2	2
	TC-TEL	2x26 W	10	7	2	2	2	2
PCA 2x26/32/42 TC EXCEL one4all xtec II	TC-TEL	2x32 W	9	7	2	2	2	2
	TC-TEL	2x42 W	8	7	1	1	1	1

Operating voltage

Type	Lamp type	Wattage	U <sub>out</sub>
PCA 1x11/13 TC EXCEL one4all xrtec II	TC-SEL	1x11 W	430 V
	TC-TEL HE	1x11 W	430 V
	TC-DEL	1x13 W	430 V
	TC-TEL	1x13 W	430 V
	TC-TEL HE	1x14 W	430 V
	TC-TEL HE	1x17 W	430 V
PCA 1x18 TC EXCEL one4all xrtec II	TC-DEL	1x18 W	430 V
	TC-TEL	1x18 W	430 V
PCA 1x18/24 TCL EXCEL one4all c xrtec II	TC-F	1x18 W	430 V
	TC-L	1x18 W	430 V
	T5c	1x22 W	430 V
	TC-F	1x24 W	430 V
	TC-L	1x24 W	430 V
PCA 1x26-57 TC EXCEL one4all xrtec II	TC-DEL	1x26 W	430 V
	TC-TEL	1x26 W	430 V
	TC-TEL	1x32 W	430 V
	T5c	1x40 W	430 V
	TC-L	1x40 W	430 V
	TC-TEL	1x42 W	430 V
	TC-TEL	1x57 W	430 V
PCA 1x28 TC-DD EXCEL one4all xrtec II	TC-DD	1x28 W	430 V
PCA 1x55 T5c EXCEL one4all xrtec II	T5c	1x55 W	430 V
PCA 2x11/13 TC EXCEL one4all xrtec II	TC-SEL	2x11 W	430 V
	TC-TEL HE	2x11 W	430 V
	TC-DEL	2x13 W	430 V
	TC-TEL	2x13 W	430 V
	TC-TEL HE	2x14 W	430 V
	TC-TEL HE	2x17 W	430 V
PCA 2x18 TC EXCEL one4all xrtec II	TC-DEL	2x18 W	430 V
	TC-TEL	2x18 W	430 V
PCA 2x18/24 TCL EXCEL one4all c xrtec II	TC-F	2x18 W	430 V
	TC-L	2x18 W	430 V
	TC-F	2x24 W	430 V
	TC-L	2x24 W	430 V
PCA 2x26/32/42 TC EXCEL one4all xrtec II	TC-DEL	2x26 W	430 V
	TC-TEL	2x26 W	430 V
	TC-TEL	2x32 W	430 V
	TC-TEL	2x42 W	430 V

Humidity: 5 % up to max. 85 %,  
not condensed  
(max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (ta) before they can be operated.


## Installation instructions

### Wiring type and cross section

The wiring can be in stranded wires with ferrules or solid with a cross section of 0.5–1.5 mm<sup>2</sup>.


Strip 9.5 mm of insulation from the cables to ensure perfect operation of the push-wire terminals.

wire preparation:  
0.5 – 1.5 mm<sup>2</sup>



### Release of the wiring

Press down the “push button” and remove the cable from front.



### Mounting of device

Max. torque for fixing: 0.5 Nm/M4

### Expected life-time

Type	Lamp type	Wattage		ta = 40 °C	ta = 50 °C	ta = 60 °C
PCA 1x11/13 TC EXCEL one4all xrttec II	TC-SEL	1 x 11 W	tc	45 °C	55 °C	65 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-TEL HE	1 x 11 W	tc	45 °C	55 °C	65 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-DEL	1 x 13 W	tc	45 °C	55 °C	65 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
TC-TEL	1 x 13 W	tc	45 °C	55 °C	65 °C	
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	
TC-TEL HE	1 x 14 W	tc	45 °C	55 °C	65 °C	
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	
TC-TEL HE	1 x 17 W	tc	45 °C	55 °C	65 °C	
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	
PCA 1x18 TC EXCEL one4all xrttec II	TC-DEL	1 x 18 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
	TC-TEL	1 x 18 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
	TC-F	1 x 18 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
TC-L	1 x 18 W	tc	50 °C	60 °C	70 °C	
		Life-time	> 100,000 h	> 100,000 h	90,000 h	
PCA 1x18/24 TCL EXCEL one4all c xrttec II	T5c	1 x 22 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
	TC-F	1 x 24 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
	TC-L	1 x 24 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h



Expected life-time

Type	Lamp type	Wattage		ta = 40 °C	ta = 50 °C	ta = 60 °C
PCA 1x26-57 TC EXCEL one4all xtec II	TC-DEL	1 x 26 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	80,000 h
	TC-TEL	1 x 26 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	80,000 h
	TC-TEL	1 x 32 W	tc	55 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	80,000 h
	T5c	1 x 40 W	tc	50 °C	60 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	75,000 h
	TC-L	1 x 40 W	tc	50 °C	60 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	75,000 h
	TC-TEL	1 x 42 W	tc	50 °C	60 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	75,000 h
TC-TEL	1 x 57 W	tc	50 °C	60 °C	70 °C	
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	
PCA 1x28 TC-DD EXCEL one4all xtec II	TC-DD	1 x 28 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	90,000 h
PCA 1x55 T5c EXCEL one4all xtec II	T5c	1 x 55 W	tc	55 °C	65 °C	x
			Life-time	> 100,000 h	> 100,000 h	x
PCA 2x11/13 TC EXCEL one4all xtec II	TC-SEL	2 x 11 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-TEL HE	2 x 11 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-DEL	2 x 13 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-TEL	2 x 13 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-TEL HE	2 x 14 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
	TC-TEL HE	2 x 17 W	tc	50 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
PCA 2x18 TC EXCEL one4all xtec II	TC-DEL	2 x 18 W	tc	55 °C	60 °C	70 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h
TC-TEL	2 x 18 W	tc	55 °C	60 °C	70 °C	
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	
PCA 2x18/24 TCL EXCEL one4all c xtec II	TC-F	2 x 18 W	tc	60 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
	TC-L	2 x 18 W	tc	60 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
	TC-F	2 x 24 W	tc	60 °C	65 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
TC-L	2 x 24 W	tc	60 °C	65 °C	75 °C	
		Life-time	> 100,000 h	> 100,000 h	50,000 h	
PCA 2x26/32/42 TC EXCEL one4all xtec II	TC-DEL	2 x 26 W	tc	60 °C	70 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
	TC-TEL	2 x 26 W	tc	60 °C	70 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
	TC-TEL	2 x 32 W	tc	60 °C	70 °C	75 °C
			Life-time	> 100,000 h	> 100,000 h	50,000 h
TC-TEL	2 x 42 W	tc	60 °C	65 °C	75 °C	
		Life-time	> 100,000 h	> 100,000 h	50,000 h	

x = not permitted


### Wiring advice

The lead length is dependent on the capacitance of the cable.

Ballast Type	Terminal	Maximum capacitance allowed			
		Cold		Hot	
PCA 1xx TC EXCEL one4all xitec II	12, 13	10, 11	200 pF	100 pF	
PCA 2xx TC EXCEL one4all xitec II	12, 13, 14, 15	10, 11, 16, 17	200 pF	100 pF	

### Sensor wires


Sensor wires must be routed separately from the lamp wires and mains cables otherwise the lighting control system may malfunction. If separate routing is not possible (for reasons of space) shielded lamp wires and mains cables must be used.

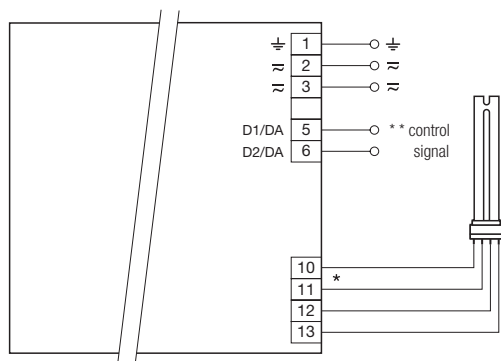

\* leads 10, 11: keep wires short, max. 1.0 m  
leads 12, 13 max. 2.0 m; ballast must be earthed  
\*\* digital signal DALI, DSI or switchDIM

### PCA TC EXCEL one4all xitec II 1x18–57 W

Dimmable ballasts from Tridonic have to be earthed.

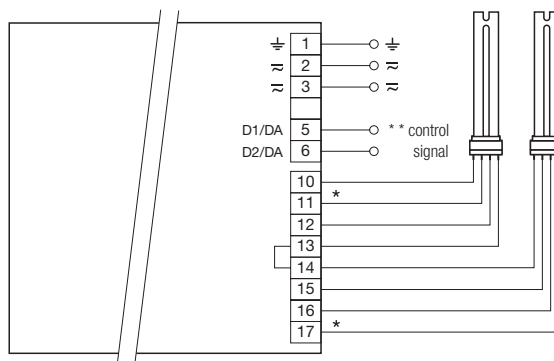

\* leads 10, 11, 16, 17 keep wires short, max. 1.0 m  
leads 12, 13, 14, 15 max. 2.0 m; ballast must be earthed  
\*\* digital signal DALI, DSI or switchDIM

### PCA TC EXCEL one4all xitec II 2x18–42 W

Dimmable ballasts from Tridonic have to be earthed.

### RFI


- Connection to the lamps of the hot leads must be kept as short as possible
- Mains leads should be kept apart from lamp leads (ideally 5–10 cm distance)
- Do not run mains leads adjacent to the electronic ballast
- Twist the lamp leads
- Keep the distance of lamp leads from the metal work as large as possible
- Mains wiring to be twisted when through wiring
- Keep the mains leads inside the luminaire as short as possible

### General advise

Electronic ballasts are virtually noise free. Magnetic fields generated during the ignition cycle can cause some background noise but only for a few milliseconds.

### Operation on DC voltage

Our ballasts are constructed to operate DC voltage and pulsed DC voltage. To operate ballasts with pulsed DC voltage the polarity is absolute mandatory.

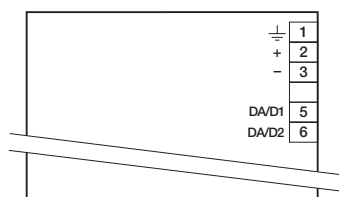

① For further technical information please visit [www.tridonic.com](http://www.tridonic.com)

### Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 Vdc for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 VAC (or 1.414 x 1500 Vdc). To avoid damage to the electronic devices this test must not be conducted.

### Glow-wire test according to EN 60598-1

650 °C, 750 °C and 850 °C passed

With standard solid wire 0.5/0.75 mm<sup>2</sup> the capacitance of the lead is 30–80 pF/m. This value is influenced by the way the wiring is made. Lamp connection should be made with symmetrical wiring.

Hot leads (10, 11, 16, 17) and cold leads (12, 13, 14, 15) should be separated as much as possible. When using two or more dimmable ballasts in one luminaire with separate dimming controls, the lamp leads must be kept separate.

Dimmable ballasts from Tridonic have to be earthed.

### Programming

With appropriate software and a USB interface different functions can be activated and various parameters can be configured in the new PCA TC EXCEL one4all Ip xitec II. All that is needed is a DALI-USB and the software.

### Master Configurator

For programming the corridorFUNCTION, device configuration (fade time, ePowerOnLevel, etc.) DC level, compatibility settings, and startup date and for resetting.

Maximum amount of ballast see DALI/DSI specification.

