



Installation manual

Pisa/Pisa AS




230V/50HZ T8, T5



1a. Dimensions Pisa. mounting holes

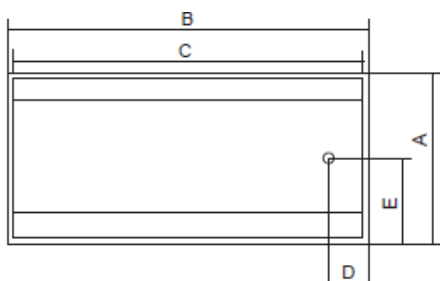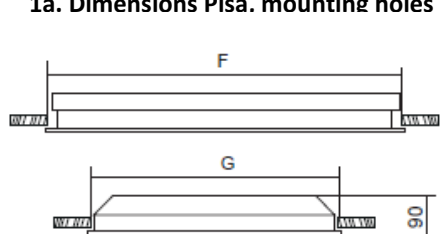

	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]
2x18W	324	622	612	311	162	600	300
2x36W	324	1227	1222	613	162	1200	300
4x18W	630	622	612	311	315	600	600
4x36W	630	1227	1222	613	315	1200	600

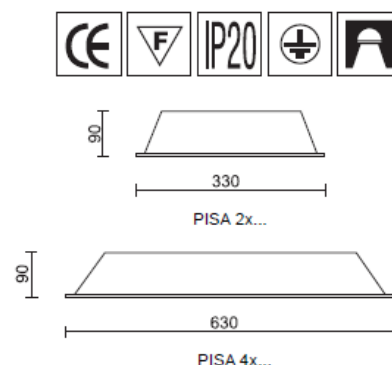

1b. Dimensions Pisa AS, mounting holes

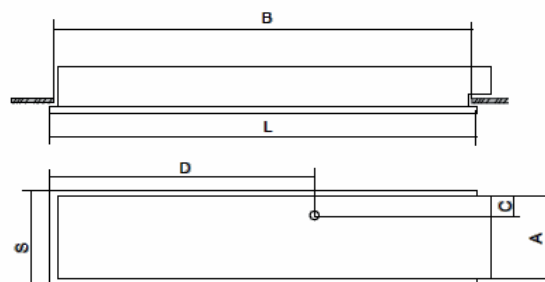


W		kg		!	
1x28W	T5/G5/	3,00	<input type="checkbox"/>	EVG	PX1409301
1x54W	T5/G5/	3,00	<input type="checkbox"/>	EVG	PX1409308
1x36W	T8 /G13/	3,00	<input type="checkbox"/>		PX1409101
1x36W	T8 /G13/	3,00	<input type="checkbox"/>	EVG	PX1409108

A [mm]	B [mm]	C [mm]	D [mm]	L [mm]	S [mm]
185	1190	25	726	1195	200

2. Assembly

- carefully take luminaire out of box and put it on a stable surface (floor or table)
- using gloves take louvers or OPAL panels out of luminaire
- connecting the power supply
 - put the power supply cable through the hole in the base of a luminaire
 - connect the wires as it's shown on a cube

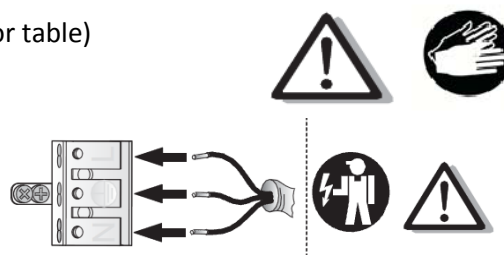

d) ceiling mounting:

- cut the hole of right dimensions (table on a first page)
- slip bracket in to luminaire
- push the luminaire in to the mounting hole
- mount the luminaire by screwing supporting brackets screws



e) mounting the light source:

- slip the fluorescent lamps of proper power into luminaire and delicately push it into the socket
- turn the fluorescent lights by 90 degrees

f) place grounding wire on a louver

g) put the louver or OPAL plate back in to luminaire

3. Important warnings:

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of luminaire functions, please assembly according to instruction.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law. More details of directive available at: <http://www.gios.gov.pl>

