

Installation manual **VIP IP44**




VIP



IP44



EL





1. Weight, dimensions, mounting holes


Power [W]	Weight	+ emergency module (EM)	DALI + Data-S	L [mm]	AW	DALI + Data-S	Mounting holes spread [mm]	+ EM	DALI + Data-S
1x14/24	1,9kg	3,5kg	-	583	+300mm	-	383	683	-
1x21/39	2,4kg	4,1kg	4,2kg	883	+300mm	+500mm	653	953	1153
1x28/54	3kg	4,7kg	4,8kg	1183	+300mm	+500mm	953	1253	1453
1x35/49/80	3,5kg	5,2kg	5,3kg	1483	+300mm	+500mm	1253	1553	1753
2x14/24	2,5kg	4,3kg	-	583	+300mm	-	383x50	683x50	-
2x21/39	3kg	4,8kg	5,2kg	883	+300mm	+500mm	653x50	953x50	1153x50
2x28/54	3,5kg	5,3kg	5,7kg	1183	+300mm	+500mm	953x50	1253x50	1453x50
2x35/49/80	4kg	5,8kg	6,2kg	1483	+300mm	+500mm	1253x50	1553x50	1753x50

2. Assembly

- remove the opal diffuser by removing the end cap
- unscrew the reflector
- put the gland into the base of a fixture (lower part up)
- put the suspension element into the lead , tighten the screw and put the feeding cable in
- connection of power supply – connect the wire as shown on a cube and below:

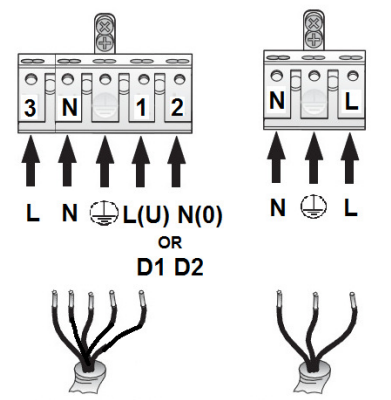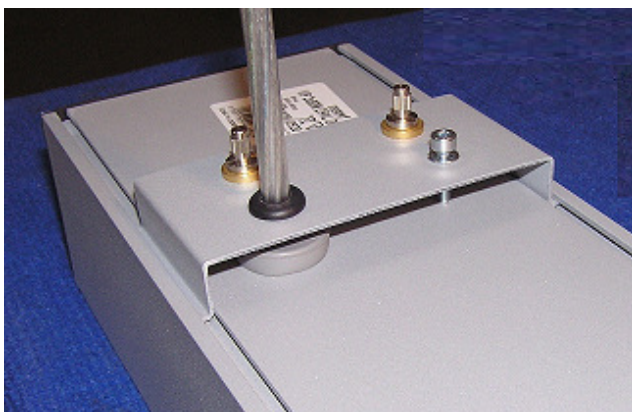

- f) screw the reflector on
- g) put the light source in
- h) put the opal diffuser in and put the end cap on
- i) installation on the ceiling:
 - screw the universal suspension on the ceiling,
 - slightly loosen the outer nut of the regulator,
 - put the suspension line in the regulator up to the point you will get desired suspension high and tighten the nut,
 - to lower the fixture loosen the nut and push it towards the housing – line will come out.

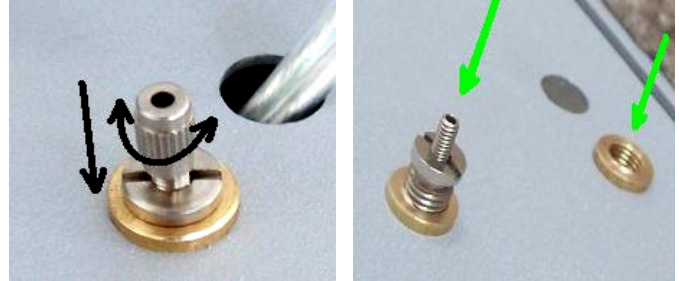

3. Important warnings:

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws caused by avoid using this manual.

Manufacturer reserves a right to change the construction of the product.

Do not assembly in places without air circulation.

To guarantee safety of fixture functions, please assembly according to instruction.



The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

