

HALOSTAR ECO 50 W 12 V GY6.35

Kod produktu: 55792



Dane techniczne:

- Construction wattage [PICOS] **50.00 W**
- Claimed equiv. conventional lamp power **75 W**
- Nominal voltage **12 V**
- Nominal wattage **50.00 W**
- Color temperature **3000 K**
- Nominal luminous flux **1180 lm**
- Rated luminous flux **1180 lm**
- Overall length **44.0 mm**
- Diameter **12.0 mm**
- Length **44.0 mm**
- Outer bulb **E12**
- Base (standard designation) **GY6.35**
- Order reference **64440 ECO 50W 1**
- Energy consumption **53 kWh/1000h**
- ILCOS **HSGS/C/AXUBIB-50-12-GY6.35-12/30**
- Light center length (LCL) **30.0 mm**
- Power factor λ **1.00**
- Light color as per EN 12464-1 **Warm White**
- Color rendering index Ra **100**
- Starting time **0.0 s**
- Warm-up time (60 %) **0.00 s**
- Nominal lamp life time **4000 h**
- Rated lamp life time **4000 h**
- Number of switching cycles **100000**
- Lumen main.fact.at end of nom.life time **0.80**
- Mercury-free **Yes**
- Lamp mercury content **0.0 mg**
- Dimmable **Yes**
- Burning position **Any**
- Energy efficiency class **B**

Product benefits

- Brilliant ECO accent lighting
- Significantly lower CO2 emissions


- High luminous efficacy compared with standard lamps
- Incredibly small dimensions for revolutionary new luminaire designs
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Contains no mercury

Areas of application

- General illumination
- Kitchen lighting
- Lighting for reading
- Entrance lighting
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings
- Outdoor applications only in suitable luminaires

Product features

- Average life: 4,000 h
- 100 % dimmable
- Color rendering index Ra: 100

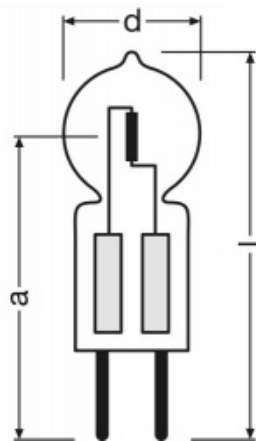

HALOGEN ECO

