

HALOPIN ECO 60 W 230 V G9

Kod produktu: 55839



Dane techniczne:

- Construction wattage [PICOS] **60.00 W**
- Claimed equiv. conventional lamp power **75 W**
- Nominal voltage **230 V**
- Nominal wattage **60.00 W**
- Color temperature **2800 K**
- Nominal luminous flux **980 lm**
- Power factor λ **1.00**
- Rated luminous flux **980 lm**
- Warm-up time (60 %) **0.00 s**
- Overall length **46.0 mm**
- Diameter **14.0 mm**
- Length **51.0 mm**
- Order reference **66760 ECO 60W 2**
- Lumen main.fact.at end of nom.life time **0.80**
- Energy consumption **60 kWh/1000h**
- ILCOS **HSGST/C/UB-60-230-G9-22**
- Light color as per EN 12464-1 **Warm White**
- Color rendering index Ra **100**
- Starting time **0.0 s**
- Outer bulb **T13,3**
- Light center length (LCL) **22.0 mm**
- Nominal lamp life time **2000 h**
- Rated lamp life time **2000 h**
- Number of switching cycles **50000**
- Base (standard designation) **G9**
- Mercury-free **Yes**
- Lamp mercury content **0.0 mg**
- Dimmable **Yes**
- Burning position **Any**
- Energy efficiency class **D**

Product benefits

- Brilliant ECO accent lighting
- Incredibly small dimensions for revolutionary new luminaire designs


- Robust filament design thanks to innovative, unique bulb pinch technology
- Approved for use in open luminaires (to IEC 60598-1)
- UV filter
- Complies with IEC 60432-2 thanks to integrated fuse function
- Lower thermal output (compared with the standard reference product)

Areas of application

- General illumination
- Workplace lighting
- Lighting for reading
- Dining table lighting
- Mirror lighting
- Accent lighting
- Mood lighting

Product features

- Average life: 2,000 h
- Dimmable
- Color rendering index Ra: 100

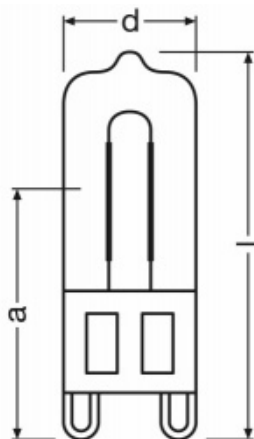

HALOGEN ECO

