

DULUX F 24 W/830 2G10

Kod produktu: 55977



Dane techniczne:

- Construction wattage [PICOS] **24.00 W**
- Nominal wattage **24.00 W**
- Color temperature **3000 K**
- Nominal luminous flux **1700 lm**
- Rated luminous flux **1700 lm**
- Light color as per EN 12464-1 **LUMILUX Warm White**
- Overall length **165.0 mm**
- Length **165.0 mm**
- Lamp mercury content **2.4 mg**
- Energy consumption **27 kWh/1000h**
- ILCOS **FSD-24/830-E-2G10-90/165**
- Product weight **86.00 g**
- Light color **830**
- Luminous flux at 25 °C **1700 lm**
- Length acc. to IEC standard **165 mm**
- Rated lamp survival factor at 8,000 h **0.95**
- Luminance **2.5 cd/cm²**
- Color rendering index Ra **80**
- Color rendering group **1B**
- Rated LLMF at 4,000 h **0.86**
- Rated LLMF at 6,000 h **0.83**
- Rated LLMF at 8,000 h **0.81**
- Rated LLMF at 12,000 h **0.79**
- Tube diameter **17.5 mm**
- Nominal lamp life time **13000 h**
- Rated lamp life time **13000 h**
- Lifespan **10000 h**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.99**
- Rated lamp survival factor at 6,000 h **0.99**
- Service life **9000 h**
- Operation mode LLMF/LSF **HF**
- Rated lamp survival factor at 12,000 h **0.64**
- Base (standard designation) **2G10**
- Appropriate disposal acc. to WEEE **Yes**

- Suitable for indoor **Yes**
- Energy efficiency class **A**
- Rated ambient temp.w.max.luminous flux **25.0 °C**

Product benefits

- Very economical
- Good quality of light
- Excellent luminous efficiency
- Extremely low profile
- Long service life

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product features


- Short and compact pin-base lamp with double-turn tubes
- Single-ended four-pin plug-in 2G10 base
- Average life: 10,000 h
- Color rendering index Ra: 80...89





Equipment / Accessories

- Suitable for operation on electronic and conventional control gear

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

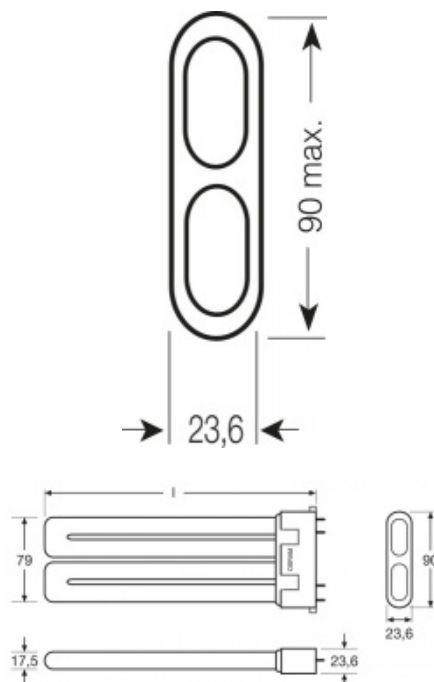

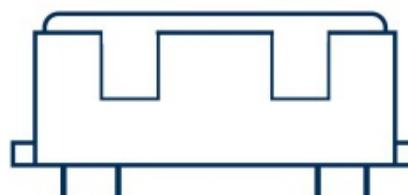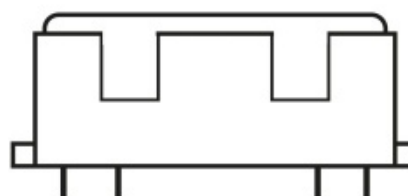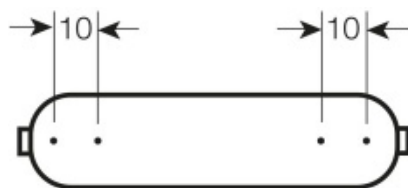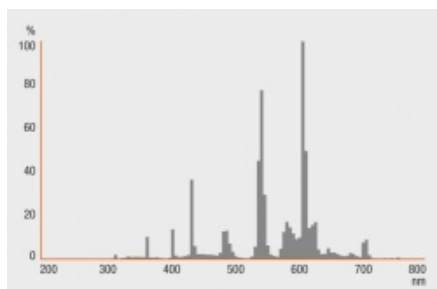

2x 75 W	→	26 W	
150 W	→	32 W	
200 W	→	42 W	
2x 150 W	→	57 W	
2x 175 W	→	70 W	

DULUX® T/E IN PLUS

