DULUX S/E 11 W/827

Kod produktu: 56038

Dane techniczne:

- Construction wattage [PICOS] **11.80 W**
- Nominal wattage **11.80 W**
- Color temperature **2700 K**
- Nominal luminous flux **900 lm**
- Rated luminous flux **900 lm**
- Light color as per EN 12464-1 **LUMILUX INTERNA**
- Overall length **214.0 mm**
- Length **214.0 mm**
- Energy consumption **15 kWh/1000h**
- ILCOS **FSDH-11/827-/P/-2G7**
- Product weight **34.80 g**
- Light color **827**
- Luminous flux at 25 °C **900 lm**
- Length acc. to IEC standard **215 mm**
- Rated lamp survival factor at 6,000 h **0.99**
- Luminance **2.7 cd/cm²**
- Length with base excl. base pins/connection **214.00 mm**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Color rendering index Ra **80□89**
- Color rendering group **1B**
- Rated LLMF at 4,000 h **0.86**
- Rated LLMF at 6,000 h **0.84**
- Rated LLMF at 8,000 h **0.82**
- Rated LLMF at 12,000 h **0.79**
- Rated LLMF at 16,000 h **0.78**
- Rated LLMF at 20,000 h **0.76**
- Tube diameter **12 mm**
- Nominal lamp life time **20000 h**
- Rated lamp life time **20000 h**
- Lifespan **20000 h**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.99**
- Service life **13000 h**
- Operation mode LLMF/LSF **HF**
- Rated lamp survival factor at 8,000 h **0.99**

biuro@elektriko.pl +48 737 449 514

- Rated lamp survival factor at 12,000 h **0.95**
- Rated lamp survival factor at 16,000 h **0.81**
- Rated lamp survival factor at 20,000 h **0.50**
- Base (standard designation) **2G7**
- Appropriate disposal acc. to WEEE **Yes**
- Lamp mercury content **1.4 mg**
- Product remark **For ECG operation only**
- Suitable for indoor **Yes**
- Energy efficiency class **A**
- Rated ambient temp.w.max.luminous flux **25.0 °C**

Product benefits

- Extremly economical
- Good quality of light
- Improved maintenance
- Low power consumption (7 W, 9 W, 11 W)
- Long service life
- Extremely low profile

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants

Product features

- Average life: 20,000 h (with QUICKTRONIC)
- Color rendering index Ra: 80…89
- Dimmable (3…100 %)
- Short and compact pin-base lamps with single-turn tubes
- Single-ended four-pin plug-in 2G7 base
- Operates on battery, solar and AC power with suitable electronic control gear

Equipment / Accessories

- Suitable for operation on electronic control gear

Safety advice
In case of lamp breakage: www.osram.com/brokenlamp

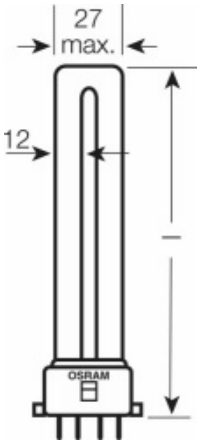

biuro@elektriko.pl
+48 737 449 514

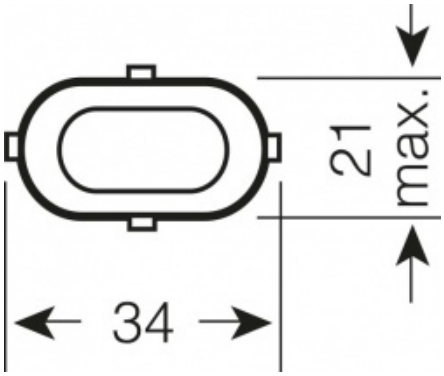

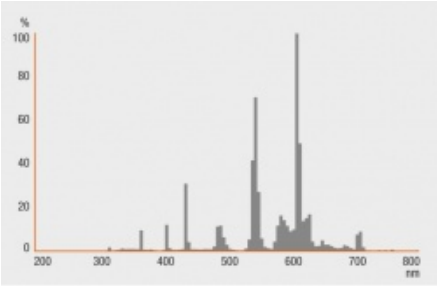





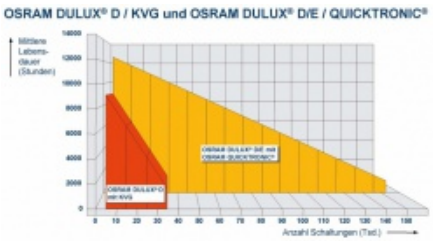

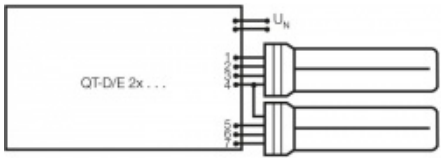

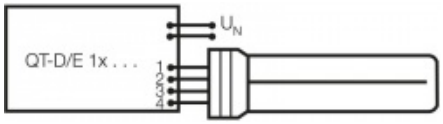

biuro@elektriko.pl
+48 737 449 514

biuro@elektriko.pl
+48 737 449 514