

HQI-T 400 W/D PRO

Kod produktu: 56333



Dane techniczne:

- Construction wattage [PICOS] **420.00 W**
- Nominal voltage **115 V**
- Nominal wattage **400.00 W**
- Color temperature **5500 K**
- Rated luminous flux **34000 lm**
- Diameter **62.0 mm**
- Length **285.0 mm**
- Energy efficiency class **A**
- Color rendering index Ra **92**
- Lamp mercury content **59.0 mg**
- Energy consumption **462 kWh/1000h**
- ILCOS **MT/UB-400/960-H/E/SL-E40-62/285**
- Product weight **200.00 g**
- Light center length (LCL) **175.0 mm**
- Burning position **Any**
- Product remark **With NAV control gear**
- Light color **960**
- Rated LLMF at 4,000 h **0.76**
- Rated LLMF at 6,000 h **0.70**
- Rated LLMF at 8,000 h **0.65**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.98**
- Rated lamp survival factor at 6,000 h **0.95**
- Rated lamp survival factor at 8,000 h **0.90**
- Rated LLMF at 12,000 h **0.55**
- Rated lamp survival factor at 12,000 h **0.80**
- Rated lamp efficacy (standard condition) **81 lm/W**
- Rated LLMF at 2,000 h **0.83**
- Lamp current **4.00000 A**
- PFC capacitor at 50 Hz **45 µF**
- Ignition voltage **4.0 / 5.0 kVp**
- Maximum permitted outer bulb temperature **500 °C**
- Lifespan B50 **16000 h**
- UV protection **Yes**
- Base (standard designation) **E40**

- Design / version **Clear**
- Dimmable **No**
- Enclosed luminaire required **Yes**
- Maximum permitted base edge temperature **250 °C**

Product benefits



- Output of up to 400 W
- High efficiency
- Long life time
- E40 screw base for simple lamp handling
- UV values significantly below the maximum permitted thresholds to IEC 61167 thanks to UV filter


Areas of application

- Factories and workshops
- Sports halls and multi-purpose halls
- Industrial installations
- Docks and port facilities
- Marshaling yards, container transshipment facilities
- Buildings, monuments, bridges
- Approved only for use in enclosed luminaires
- Outdoor applications only in suitable luminaires

Product features

- POWERSTAR quartz technology
- Light colors: neutral white (N), daylight (D)

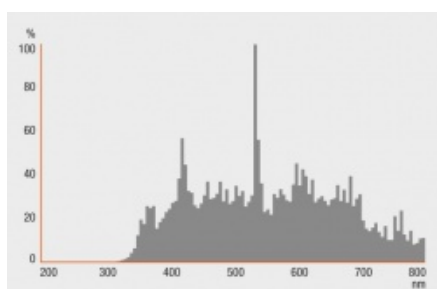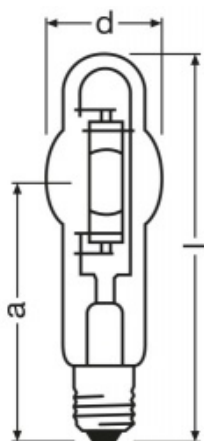



E40
IEC 7004-24
DIN 49625

