

HALOLINE ECO 48 W 230 V R7S

Kod produktu: 56730



Dane techniczne:

- Claimed equiv. conventional lamp power **60 W**
- Nominal voltage **230 V**
- Nominal wattage **48.00 W**
- Color temperature **2800 K**
- Nominal luminous flux **750 lm**
- Power factor λ **1.00**
- Rated luminous flux **750 lm**
- Light color as per EN 12464-1 **Warm White**
- Starting time **0.0 s**
- Warm-up time (60 %) **0.00 s**
- Overall length **74.9 mm**
- Diameter **12.0 mm**
- Length **74.9 mm**
- Outer bulb **T12**
- Nominal lamp life time **2000 h**
- Rated lamp life time **2000 h**
- Base (standard designation) **R7s**
- Mercury-free **Yes**
- Number of switching cycles **50000**
- Dimmable **Yes**
- Energy efficiency class **C**
- Order reference **64684 ECO 48W 2**
- Color rendering index Ra **100**
- Lumen main.fact.at end of nom.life time **0.80**
- Lamp mercury content **0.0 mg**
- Energy consumption **48 kWh/1000h**
- ILCOS **HDG-48-230-R7s-74,9**
- Burning position **Any**
- Fuse, quick-acting **2.0 A**
- Product remark **Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required/Technical and light values are subject to be changed**
- Rated wattage **48.00 W**
- Nominal voltage **230 V**
- Power factor λ **1.00**

- Light color as per EN 12464-1 **Warm White**
- Color rendering index Ra **100**
- Starting time **0.0 s**
- Warm-up time (60 %) **0.00 s**
- Diameter **12.0 mm**
- Outer bulb **T12**
- Nominal lamp life time **2000 h**
- Rated lamp life time **2000 h**
- Number of switching cycles **50000**
- Lumen main.fact.at end of nom.life time **0.80**
- Base (standard designation) **R7s**
- Mercury-free **Yes**
- Lamp mercury content **0.0 mg**
- Dimmable **Yes**
- Burning position **Any**
- Fuse, quick-acting **2.0 A**

Product benefits


- Brilliant ECO accent lighting
- Direct replacement for standard tubular halogen lamps
- Significantly lower CO2 emissions
- Lower thermal output (compared with the standard reference product)
- No transformer required
- Contains no mercury

Areas of application

- General illumination
- Entrance lighting
- Pathway lighting
- Outdoor applications only in suitable luminaires
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings

Product features

- Average life: 2,000 h
- Dimmable
- Color rendering index Ra: 100

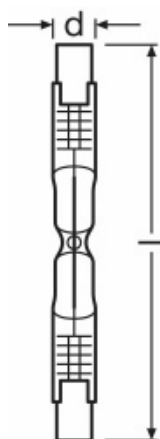



**HALOGEN
ECO**

