

L 18 W/965

Kod produktu: 56911



Dane techniczne:

- Nominal wattage **18.00 W**
- Color temperature **6500 K**
- Nominal luminous flux **1000 lm**
- Rated luminous flux **1000 lm**
- Light color as per EN 12464-1 **BIOLUX**
- Diameter **26.0 mm**
- Length **590.0 mm**
- Nominal lamp life time **20000 h**
- Rated lamp life time **20000 h**
- Base (standard designation) **G13**
- Appropriate disposal acc. to WEEE **Yes**
- Energy efficiency class **B**
- Color rendering index $R_a \geq 95$
- Maximum diameter **26.0 mm**
- Lamp mercury content **4.5 mg**
- Energy consumption **23 kWh/1000h**
- Tube diameter **26 mm**
- Lifespan **20000 h**
- Light color **965**
- Luminous flux at 25 °C **1000 lm**
- Rated LLMF at 4,000 h **0.87**
- Rated LLMF at 6,000 h **0.82**
- Rated LLMF at 8,000 h **0.80**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.99**
- Rated lamp survival factor at 6,000 h **0.99**
- Service life **16000 h**
- Operation mode LLMF/LSF **50 Hz**
- Rated lamp survival factor at 8,000 h **0.99**
- Suitable for indoor **Yes**
- Rated LLMF at 12,000 h **0.78**
- Rated lamp survival factor at 12,000 h **0.90**
- Length with base excl. base pins/connection **590.00 mm**
- Rated ambient temp.w.max.luminous flux **25.0 °C**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**

- Rated lamp efficacy (standard condition) **56 lm/W**
- Rated LLMF at 2,000 h **0.89**
- Color coordinates chromaticity diagram **0.342/0.348**
- Rated wattage **18.00 W**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Color temperature **6500 K**
- Light color as per EN 12464-1 **BIOLUX**
- Color rendering index Ra **≥95**
- Light color **965**
- Rated LLMF at 4,000 h **0.87**
- Rated LLMF at 6,000 h **0.82**
- Rated LLMF at 8,000 h **0.80**
- Rated LLMF at 12,000 h **0.78**
- Rated LLMF at 2,000 h **0.89**
- Color coordinates chromaticity diagram **0.342/0.348**
- Diameter **26.0 mm**
- Maximum diameter **26.0 mm**
- Tube diameter **26 mm**
- Nominal lamp life time **20000 h**
- Rated lamp life time **20000 h**
- Lifespan **20000 h**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.99**
- Rated lamp survival factor at 6,000 h **0.99**
- Service life **16000 h**
- Operation mode LLMF/LSF **50 Hz**
- Rated lamp survival factor at 8,000 h **0.99**
- Rated lamp survival factor at 12,000 h **0.90**
- Base (standard designation) **G13**
- Appropriate disposal acc. to WEEE **Yes**
- Suitable for indoor **Yes**
- Energy efficiency class **B**
- Rated ambient temp.w.max.luminous flux **25.0 °C**

Product benefits

- Emit a daylight white light that gives your animals a sense of natural sunlight

Areas of application


- Excellent for raising small animals



Product features

- Very good color rendering group: 1A (Ra: ≥ 90)

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp



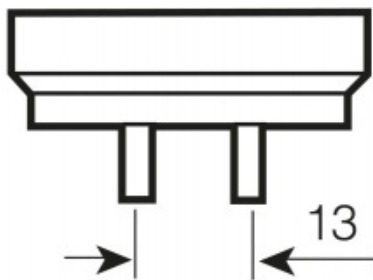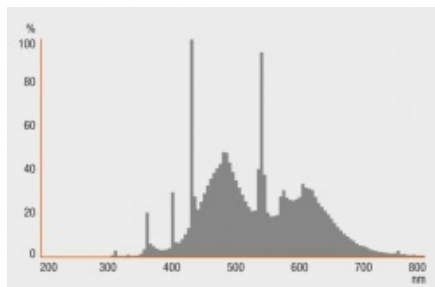

G13
IEC 7004-51
DIN 49653 T1

