

# L 6 W/930

Kod produktu: 56920



## Dane techniczne:

- Nominal wattage **6.00 W**
- Light color as per EN 12464-1 **LUMILUX DE LUXE Warm White**
- Diameter **16.0 mm**
- Length **212.0 mm**
- Nominal lamp life time **5000 h**
- Rated lamp life time **5000 h**
- Base (standard designation) **G5**
- Appropriate disposal acc. to WEEE **Yes**
- Energy efficiency class **B**
- Lamp mercury content **2.5 mg**
- Energy consumption **7 kWh/1000h**
- Tube diameter **16 mm**
- Lifespan **10000 h**
- Light color **930**
- Service life **5600 h**
- Length with base excl. base pins/connection **212.00 mm**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Rated wattage **6.00 W**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Diameter **16.0 mm**
- Tube diameter **16 mm**
- Service life **5600 h**
- Base (standard designation) **G5**
- Appropriate disposal acc. to WEEE **Yes**
- Lamp mercury content **2.5 mg**
- Energy efficiency class **B**

## Product benefits

- Excellent color rendering
- Ideal for cost-effective creative illumination and decoration
- Very good luminous flux maintenance throughout the life of the lamp
- Slim and compact

## Areas of application

- Shops
- Supermarkets and department stores
- Public buildings

### Product features




- Average lifetime: up to 10,000 h (with QUICKTRONIC ECG)
- Very good color rendering group: 1A ( $R_a \geq 90$ )

### Safety advice

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)

### System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs

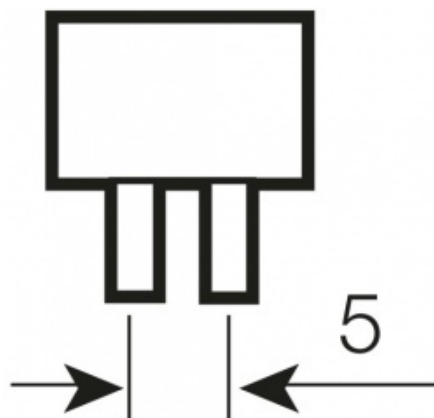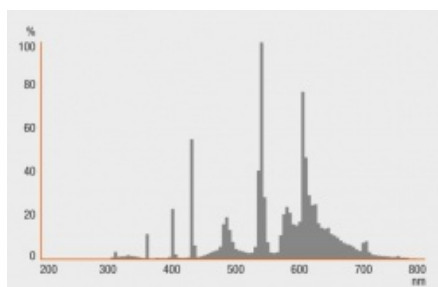



Die Zuleitungen 3 und 4 sollen so kurz wie möglich sein



Die Zuleitungen 3 und 4 sollen so kurz wie möglich sein

