

## POP II Suspended version



Slim luminaire of delicate form with a frame made of aluminum, designed for ceiling mounting. Available in versions for T5 fluorescent lamps and LED of reputable manufacturers. High quality power supplier provide power factor of  $\cos \phi = 0,95$ .

**Materials:** electrostatically painted aluminum profile (standard color: grey), opal diffuser made of PMMA

**Installation:** suspended

**Accessories:** suspension included

**Power:** 230 V

### ELECTRICAL DATA

Light source	T5
Lamp holder	G5
Type of equipment	EVG
Voltage rating	230 V

### MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum

### INFROMATIONS

Color	Grey
-------	------

### CERTIFICATES


Degree of protection (IP)	IP40
Class of protection	I
Light source protection	Yes
Energy class	A
CE	Yes

### OPTICAL DATA

Louver/shutter	OPAL
Diffuser color	White
Diffuser material	Opal/mat plastic
Reflector	None

### MATERIALS

Product code	Light source power [W]	Light distribution	Weight [kg]
PX0831171	2x39	DI/IN	3.0
PX0831178	2x54	DI/IN	5.0
PX0831199	4x14	DI	4.4
PX0831206	4x24	DI	4.4

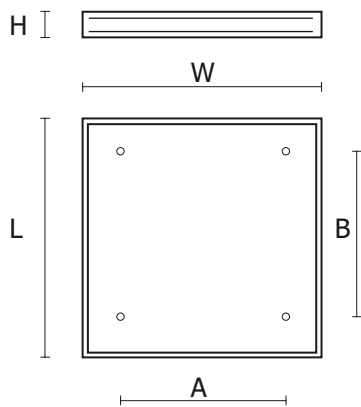

## DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX0831171	900	100	45
PX0831178	1200	220	45
PX0831199	595	595	45
PX0831206	595	595	45

L = Length | W = Width | H = Height / Depth

## MOUNTING HOLES

Product code	A [mm]	B [mm]
PX0831171	60	280
PX0831178	120	280
PX0831199	400	400
PX0831206	400	400

A = Spacing length | B = Spacing width