




Greenlight LED



Luminaire designed for LED light sources in the form of a rectanle pillar. Various colors, dimensions and slopes available as a standard. Perfect solution for discreet lighting of buildings surroundings, paths and gardens.

Materials: housing made of aluminum profile painted with a paint resistant to external conditions (standard color: graphite, other colours on request, frosted glass

Installation: for the ground

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Light source power	9W
Type of equipment	Not required
Voltage rating	230 V
Light source included	Yes
Luminaire power	9 W
Type of LED	VS
SELV	Yes

MECHANICAL DATA

Type of installation	Pole mounted
Housing material	Aluminum

INFROMATIONS

Color	Anthracite
Operating temperature range	-20 ... 40 °

MATERIALS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Info	Weight [kg]
PX4059001	1×9	480	53	3000	115° 50X60	0.9
PX4059008	1×9	490	54	4000	115° 50X60	0.9
PX4059015	1×9	480	53	3000	90° 50X100	1.1
PX4059022	1×9	490	54	4000	90° 50X100	1.1
PX4059029	1×9	480	53	3000	115° 50X100	1.1
PX4059036	1×9	490	54	4000	115° 50X100	1.1

CERTIFICATES


Degree of protection (IP)	IP65
Impact resistance	IK08
Class of protection	I
Light source protection	Yes
Energy class	A
CE	Yes

LIGHT DATA

Light color	White
Color rendering index	80
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Diffuser color	None
Diffuser material	Opal glass
Reflector	High gloss

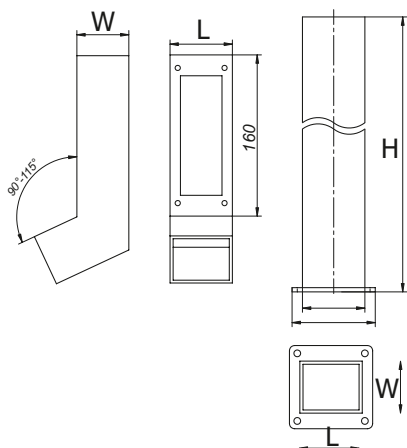

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX4059001	60	50	170
PX4059008	60	50	170
PX4059015	100	50	120
PX4059022	100	50	120
PX4059029	100	50	170
PX4059036	100	50	170

L = Length | W = Width | H = Height / Depth

ACCESSORIES

Structural elements

Słup Greenlight 50x60

Słup Greenlight 50x100