



Roma II T5 IP65



Series of luminaires recommended for industrial areas and for clean rooms where the higher IP protection degree is required. The following versions are available: with louver and transparent (PMMA) diffuser or with louver and tempered glass (SH) diffuser. The luminaire can be mounted into modular ceiling 600x600 with visible supported structure or into plaster-cardboard ceiling. Triple fluorescent lamp version available.

Materials: powder painted housing made of galvanized steel sheets (standard color: white), parabolic louvres made of polished aluminum PAR, PMMA diffuser or transparent tempered glass, polycarbonate PC or prismatic PRM diffuser on request

Installation: for 600x600 ceiling, for cardboard ceiling

ELECTRICAL DATA

Light source	T5
Lamp holder	G5
Type of equipment	EVG
Voltage rating	230 V

MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Steel sheet

INFORMATIONS

Color	White
-------	-------

CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
Light source protection	Yes
Energy class	A
CE	Yes
PZH	Yes

LIGHT DATA

Light distribution	DI
--------------------	----

OPTICAL DATA


Reflector	None
-----------	------

MATERIALS

Product code	Light source power [W]	Louver/shutter	CNBOP	Weight [kg]
PX1215203	2x14	PAR	Yes	4.00
PX1215209	2x24	PAR	Yes	4.20
PX1215215	2x28	PAR	Yes	7.00
PX1215221	2x54	PAR	Yes	7.00
PX1215227	4x14	PAR	Yes	6.50
PX1215235	4x24	PAR	Yes	6.50
PX1215279	3x28	PAR	Yes	6.50
PX1215265	3x54	PAR	Yes	6.50
PX1214203	2x14	PAR SH	Yes	5.14
PX1214209	2x24	PAR SH	Yes	5.14
PX1214215	2x28	PAR SH	Yes	9.03
PX1214221	2x54	PAR SH	Yes	9.03
PX1214243	4x14	PAR SH	Yes	8.70
PX1214251	4x24	PAR SH	Yes	8.70
PX1214259	4x28	PAR SH	Yes	8.70
PX1214267	4x54	PAR SH	Yes	18.30

Product code	Light source power [W]	Louver/shutter	CNBOP	Weight [kg]
PX1216257	2×14	OPAL	Yes	4.00
PX1216263	2×24	OPAL	Yes	4.20
PX1216269	2×28	OPAL	Yes	7.00
PX1216275	2×54	OPAL	Yes	7.00
PX1216281	4×14	OPAL	Yes	6.50
PX1216287	4×24	OPAL	Yes	6.50
PX1216293	3×14	OPAL	No	6.20

DIMENSIONS

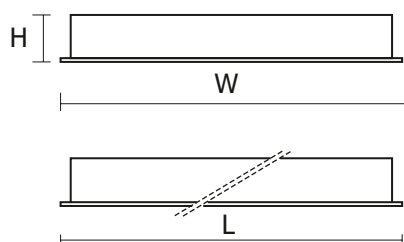

Product code	L [mm]	W [mm]	H [mm]	C [mm]	D [mm]
PX1215203	596	296	88	280	280
PX1215209	596	296	88	280	580
PX1215215	1196	296	88	280	1180
PX1215221	1196	296	88	280	1180
PX1215227	596	596	88	580	580
PX1215235	596	596	88	580	580
PX1215279	1196	596	88	580	580
PX1215265	1196	596	88	580	580
PX1214203	596	296	88	280	280
PX1214209	596	296	88	280	280
PX1214215	1196	296	88	280	280
PX1214221	1196	296	88	280	280
PX1214243	596	596	88	580	580
PX1214251	596	596	88	580	580
PX1214259	1196	596	105	-	-
PX1214267	1196	596	105	-	-
PX1216257	596	296	88	280	580
PX1216263	596	296	88	280	580
PX1216269	1196	296	88	280	1180
PX1216275	1196	296	88	280	1180
PX1216281	596	596	88	580	580
PX1216287	596	596	88	580	580
PX1216293	596	596	88	580	580

L = Length | W = Width | H = Height / Depth | C = Installation length | D = Installation width