



Uni LED



Universal luminaire designed specifically for LED light sources. Simple installation, LED chips of reputable manufacturers and power factor $\cos \phi = 0,97$ makes the UNI LED a high quality product with a wide range of possible applications. UNI LED was designed especially for offices, conference rooms and pedestrian walkways and is available in versions with motion sensor and emergency module.

Materials: powder painted housing made of galvanized steel sheets (standard color: white), frame on magnets with protection against falling, opal, prismatic PRM or microprismatic MPRM diffuser

Installation: suspended, for 600x600 ceiling, ceiling mounted

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Light source power	44W
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Luminaire power	44 W
Type of LED	LG6030
SELV	Yes

MECHANICAL DATA

Type of installation	Universal mounting
Housing material	Steel sheet

INFORMATIONS

Color	White
-------	-------

MATERIALS

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes

LIGHT DATA


Light color	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Reflector	None
-----------	------

Product code	Light source power [W]	Louver/shutter	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Color temperature [K]	Info	Weight [kg]
PX3751101	1x44	OPAL	3900	89	3000	-	5.50
PX3751119	1x44	OPAL	4000	91	4000	-	5.50
PX3751125	1x44	PRM	4250	97	4000	-	5.50
PX3751107	1x44	PRM	4150	94	3000	-	5.50
PX3751131	1x44	MPRM	4200	95	4000	-	5.50
PX3751113	1x44	MPRM	4100	93	3000	-	5.50
PX3751137	1x44	OPAL	3900	89	3000	Emergency module 3h	6.25
PX3751155	1x44	OPAL	4000	91	4000	Emergency module 3h	6.25
PX3751143	1x44	PRM	4150	94	3000	Emergency module 3h	6.25
PX3751161	1x44	PRM	4250	97	4000	Emergency module 3h	6.25
PX3751149	1x44	MPRM	4100	93	3000	Emergency module 3h	6.25
PX3751167	1x44	MPRM	4200	95	4000	Emergency module 3h	6.25

DIMENSIONS

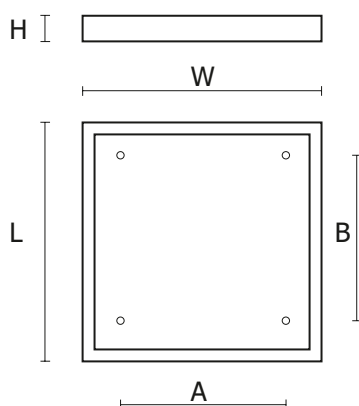

L [mm]	W [mm]	H [mm]
595	595	45

595	595	45
-----	-----	----

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

A [mm]	B [mm]
500	500

500	500
-----	-----

A = Spacing length | B = Spacing width

ACCESSORIES

Electric elements



Electrical suspension

Microwave motion sensor Max 1200W

Installation elements



Simple suspension