



Bari DLK NT



Downlight luminaire for surface and suspended installation with a square frame. BARI DLK is a complementation of BARI series and is a great solution for lighting corridors, shopping malls, hotels and other public facilities.

Materials: powder painted, white aluminum frame; louver and reflector made of polished aluminum; steel sheet body

Installation: surface mounted, suspended

Accessories: IP 44 glass (transparent, centrally frosted, frosted), simple suspension, electric suspension

Power: 230V

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet
Electrical track connection	No

INFROMATIONS

Color	White
Dimmable	No

MATERIALS


Product code	Light source	Lamp holder	Light source power [W]	Louver/shutter	Louver material	Info	Degree of protection (IP)
PX1483401	TC-DEL	G24q-2	1×18	-	-	Odbłyśnik	IP20
PX1483408	TC-DEL	G24q-3	1×26	-	-	Odbłyśnik	-
PX1483415	TC-DEL	G24q-2	2×18	-	-	Odbłyśnik	-
PX1482301	TC-DEL	G24q-2	2×18	PAR	Aluminum	PAR	-
PX1483422	TC-DEL	G24q-3	2×26	-	-	Odbłyśnik	-
PX1482308	TC-DEL	G24q-3	2×26	PAR	Aluminum	PAR	-
PX1483429	TC-TEL	G24q-3	2×32	-	-	Odbłyśnik	-

CERTIFICATES

Class of protection	I
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA

Light distribution	DI
--------------------	----

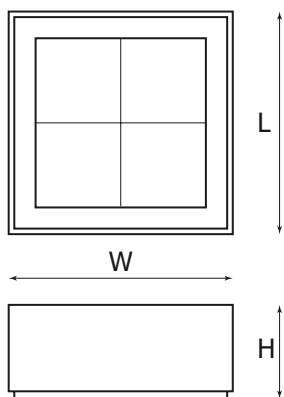

DIMENSIONS

L [mm]	W [mm]	H [mm]
245	245	137

L = Length | W = Width | H = Height / Depth

ACCESSORIES

Electric elements



Electrical suspension

Installation elements



Simple suspension

Optical elements



Bari DLK IP44 Glass