



## Quazar

ikony

Very high efficiency 82%. A modern recessed luminaire designed with patented by PXF Lighting light distribution system and very high technical parameters. The luminaire combines such features as: high lighting efficiency 82%, compact size and modern design. Thanks to adjustable louvers the lighting beam can be adapted in scope  $-15^{\circ}/+15^{\circ}$ . The usage of surface housing gives possibility of installation directly on the ceiling.

**Materials:** powder painted housing made of steel sheets (standard color: white), parabolic louvre made of high quality anodized aluminum

**Installation:** for cardboard ceiling, for 600x600 ceiling, ceiling mounted

**Accessories:** surface mounting housing IP20 or IP65

**Power:** 230 V

### ELECTRICAL DATA

Light source	T5
Lamp holder	G5
Type of equipment	EVG
Voltage rating	230 V

### MECHANICAL DATA

Type of installation	Universal mounting
Housing material	Steel sheet

### INFROMATIONS

Color	White
-------	-------

### CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Energy class	A
CE	Yes
CNBOP	Yes

### LIGHT DATA

Light distribution	DI
--------------------	----


### OPTICAL DATA

Louver/shutter	PAR
Louver material	Aluminum
Reflector	Mat

### MATERIALS

Product code	Light source power [W]
PX1020288	2x14
PX1020295	2x24
PX1020318	2x28
PX1020319	2x54
PX1020301	4x14
PX1020315	4x24

## DIMENSIONS

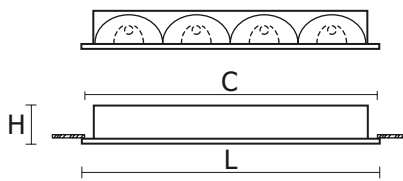

Product code	L [mm]	W [mm]	H [mm]	C [mm]	D [mm]
PX1020288	595	296	54	580	280
PX1020295	595	296	54	580	280
PX1020318	1196	296	54	1175	280
PX1020319	1196	296	54	1175	280
PX1020301	595	595	54	580	580
PX1020315	595	595	54	580	580

L = Length | W = Width | H = Height / Depth | C = Installation length | D = Installation width

## ACCESSORIES

### Structural elements

Quazar Surface mounting housing IP20