



Torino II IP65 LED



Series of luminaires recommended for industrial areas and for clean rooms where increased IP protection degree is required. Version for LED light sources with two types of diffusers: microprismatic and opal available. Luminaire dedicated for surface installation.

Materials: powder painted housing made of galvanized steel sheets (standard color: white), microprismatic diffuser (MPRM) made of PMMA or opal diffuser (OPAL) made of polycarbonate

Installation: ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	LG6030
SELV	Yes

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFROMATIONS

Color	White
-------	-------

MATERIALS

Product code	Light source power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Info	Weight [kg]
PX3750501	1×44	OPAL	3650	83	3000	600x600	5.5
PX3750508	1×44	OPAL	3750	85	4000	600x600	5.5
PX3750515	1×55	OPAL	4350	79	3000	300x1200	8.0
PX3750522	1×55	OPAL	4450	81	4000	300x1200	8.0
PX3750529	1×44	MPRM	3850	88	3000	600x600	5.5
PX3750536	1×44	MPRM	3950	90	4000	600x600	5.5
PX3750543	1×55	MPRM	4550	83	3000	300x1200	8.0
PX3750550	1×55	MPRM	4650	85	4000	300x1200	8.0


CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes

LIGHT DATA

Light color	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I

DIMENSIONS

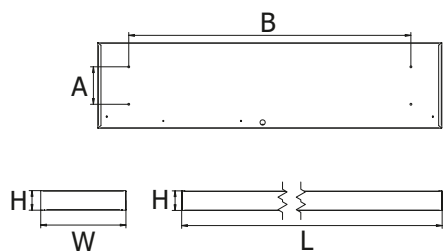

Product code	L [mm]	W [mm]	H [mm]
PX3750501	595	595	68
PX3750508	595	595	68
PX3750515	1196	296	68
PX3750522	1196	296	68
PX3750529	595	595	68
PX3750536	595	595	68
PX3750543	1196	296	68
PX3750550	1196	296	68

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B [mm]
PX3750501	430	430
PX3750508	430	430
PX3750515	930	130
PX3750522	930	130
PX3750529	430	430
PX3750536	430	430
PX3750543	930	130
PX3750550	930	130

A = Spacing length | B = Spacing width