




Bari MINI LED



Modern and universal downlight luminaire of high lighting parameters, based on LED module. Applications: offices, restaurants, hotels, corridors, galleries etc.

Materials: powder painted aluminum ring (standard color: white), housing made of steel sheets, transparent tempered glass, reflector made of 99,85% pure aluminum

Installation: for cardboard ceiling

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Light source power	13W
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Luminaire power	13 W
Type of LED	VERO13
Power factor	0.96
SELV	Yes

MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Aluminum

INFROMATIONS

Color	White
Control	Bez

MATERIALS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Beam angle [°]	Weight
PX1486580	1×13	950	73	3000	20	-
PX1486590	1×13	1000	77	4000	20	-
PX1486585	1×13	1000	77	3000	30	1.00 kg
PX1486592	1×13	1050	81	4000	30	1.00 kg
PX1486587	1×13	1000	77	3000	50	-
PX1486594	1×13	1050	81	4000	50	-

CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
For ceiling installation, fire class "F" (L)	Yes


LIGHT DATA

Luminaire luminous efficiency	100 %
Light color	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Louver/shutter	Transparent plastic
Diffuser color	None
Diffuser material	Transparent glass
Reflector	High gloss

DIMENSIONS

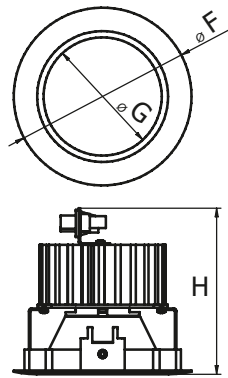

H [mm]	F [mm]	G [mm]
110	120	110

H = Height / Depth | F = Outer diameter | G = Inner diameter