



Monza



A surface mounted lighting luminaire with bevelled edges of two sides. Available with 4 different louvers and 2 diffusers.

Materials: powder painted housing made of steel sheets (standard color: white), parabolic louvre made of high quality polished PAR and matt PAR-S anodized aluminum, straight louvres of polished SLA or white SLB aluminum, opal or prismatic diffuser made of PMMA

Installation: ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	T8
Lamp holder	G13
Type of equipment	EVG
Voltage rating	230 V

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFROMATIONS

Color	White
-------	-------

MATERIALS

Product code	Light source power [W]	Louver/shutter	Weight [kg]
PX1708122	2×18	OPAL	3.20
PX1708129	2×36	OPAL	6.00
PX1708136	4×18	OPAL	5.60
PX1712122	2×18	PRM	3.20
PX1712129	2×36	PRM	6.00
PX1712136	4×18	PRM	5.60
PX1688150	1×36	SLA	3.54
PX1688157	1×58	SLA	4.45
PX1688164	2×18	SLA	3.07
PX1688171	2×36	SLA	5.26
PX1688178	2×58	SLA	7.40
PX1688185	4×18	SLA	5.31
PX1688192	4×36	SLA	9.81
PX1696150	1×36	SLB	3.54
PX1696157	1×58	SLB	4.45
PX1696164	2×18	SLB	3.07
PX1696171	2×36	SLB	5.26
PX1696178	2×58	SLB	7.40


CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Energy class	A
CE	Yes
CNBOP	Yes

LIGHT DATA

Light distribution	DI
--------------------	----

Product code	Light source power [W]	Louver/shutter	Weight [kg]
PX1696185	4×18	SLB	5.31
PX1696192	4×36	SLB	9.81
PX1700150	1×36	PAR	3.54
PX1700157	1×58	PAR	4.45
PX1700164	2×18	PAR	3.07
PX1700171	2×36	PAR	5.26
PX1700178	2×58	PAR	7.40
PX1700185	4×18	PAR	5.31
PX1700192	4×36	PAR	9.81
PX1704150	1×36	PAR-S	3.54
PX1704157	1×58	PAR-S	4.45
PX1704164	2×18	PAR-S	3.07
PX1704171	2×36	PAR-S	5.26
PX1704178	2×58	PAR-S	7.40
PX1704185	4×18	PAR-S	5.31
PX1704192	4×36	PAR-S	9.81

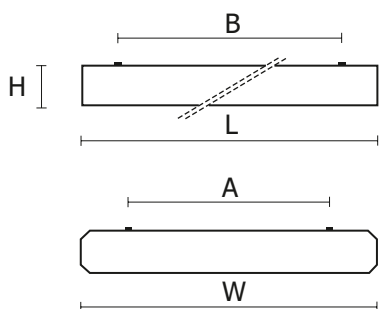

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX1708122	618	345	90
PX1708129	1225	345	90
PX1708136	618	643	90
PX1712122	618	345	90
PX1712129	1225	345	90
PX1712136	618	643	90
PX1688150	1233	215	90
PX1688157	1533	215	90
PX1688164	618	345	90
PX1688171	1225	345	90
PX1688178	1525	345	90
PX1688185	618	643	90
PX1688192	1225	643	90
PX1696150	1233	215	90
PX1696157	1533	215	90

Product code	L [mm]	W [mm]	H [mm]
PX1696164	618	345	90
PX1696171	1225	345	90
PX1696178	1525	345	90
PX1696185	618	643	90
PX1696192	1225	643	90
PX1700150	1233	215	90
PX1700157	1533	215	90
PX1700164	618	345	90
PX1700171	1225	345	90
PX1700178	1525	345	90
PX1700185	618	643	90
PX1700192	1225	643	90
PX1704150	1233	215	90
PX1704157	1533	215	90
PX1704164	618	345	90
PX1704171	1225	345	90
PX1704178	1525	345	90
PX1704185	618	643	90
PX1704192	1225	643	90

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B [mm]
PX1708122	130	414
PX1708129	130	1023
PX1708136	493	414
PX1712122	130	414
PX1712129	130	1023
PX1712136	493	414
PX1688150	90	1023
PX1688157	90	1323
PX1688164	130	414
PX1688171	130	1023
PX1688178	130	1323
PX1688185	493	414
PX1688192	493	1323
PX1696150	90	1023
PX1696157	90	1323
PX1696164	130	414
PX1696171	130	1023
PX1696178	130	1323
PX1696185	493	414
PX1696192	493	1323

Product code	A [mm]	B [mm]
PX1700150	90	1023
PX1700157	130	1323
PX1700164	130	414
PX1700171	130	1023
PX1700178	130	1323
PX1700185	493	414
PX1700192	493	1323
PX1704150	90	1023
PX1704157	90	1323
PX1704164	130	414
PX1704171	130	1023
PX1704178	130	1323
PX1704185	493	414
PX1704192	493	1323

A = Spacing length | B = Spacing width