



Modena LED



LED version of plafond with high esthetic features and over standard parameters: UV proof, highly resistant to mechanical factors and adverse external conditions. Protection degree IP66, body of high quality material. Emergency module AW 3H. Plafonds available with motion detector, daylight sensor or emergency module.

Materials: white version: base and diffuser made of white UV proof polycarbonate, transparent version: base and diffuser made of transparent UV proof polycarbonate, grey version: grey base and white diffuser made of UV proof polycarbonate

Installation: ceiling mounted, wall mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Ignitor/starter	Not required
Voltage rating	230 V
Light source included	Yes
Type of LED	LG5630
SELV	Yes

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Polycarbonate

INFROMATIONS

Operating temperature range	-20 ... 40 °
-----------------------------	--------------

CERTIFICATES

Degree of protection (IP)	IP66
Impact resistance	IK10
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes


LIGHT DATA

Light color	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

MATERIALS

Product code	Light source power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Color	Info	Weight [kg]
PX3000234	1×21	OPAL	1200	57	3000	White	-	1.80
PX3000241	1×21	OPAL	1250	60	4000	White	-	1.80
PX3002234	1×21	OPAL	1200	57	3000	Grey	-	1.80
PX3002241	1×21	OPAL	1250	60	4000	Grey	-	1.80
PX3000206	1×26	OPAL	1625	63	3000	White	-	2.00
PX3000213	1×26	OPAL	1675	64	4000	White	-	2.00
PX3000220	1×26	OPAL	1625	63	3000	White	AW 3H	2.55
PX3000227	1×26	OPAL	1675	64	4000	White	AW 3H	2.55
PX3002206	1×26	OPAL	1625	63	3000	Grey	-	2.00
PX3002213	1×26	OPAL	1675	64	4000	Grey	-	2.00

Product code	Light source power [W]	Louver/shutter	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Color temperature [K]	Color	Info	Weight [kg]
PX3002220	1×26	OPAL	1625	63	3000	Grey	AW 3H	2.55
PX3002227	1×26	OPAL	1675	64	4000	Grey	AW 3H	2.55
PX3001256	1×26	Transparent plastic	2061	79	3000	None	-	2.00
PX3001263	1×26	Transparent plastic	2125	82	4000	None	-	2.00
PX3001270	1×26	Transparent plastic	2061	79	3000	None	AW 3H	2.55
PX3001277	1×26	Transparent plastic	2125	82	4000	None	AW 3H	2.55

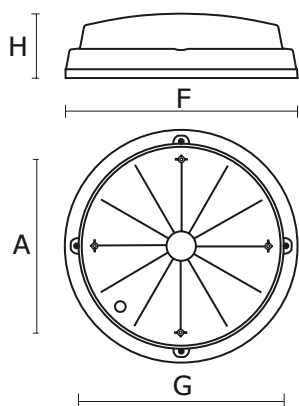

DIMENSIONS

H [mm] | **F [mm]**

110 | 400

H = Height / Depth | F = Outer diameter

MOUNTING HOLES

A [mm]

298

A = Spacing length