



Modena



Plafond with high esthetic features and over standard parameters: UV proof, higher resistance to mechanical factors and adverse external conditions. Protection degree IP66, body of high quality opaque material. Plafonds available with motion detector and daylight sensor.

Materials: white version: base and diffuser made of white UV proof polycarbonate, transparent version: base and diffuser made of transparent UV proof polycarbonate, grey version: grey base and white diffuser made of UV proof polycarbonate

Installation: ceiling mounted, wall mounted

Power: 230 V

ELECTRICAL DATA

For emergency lighting	Yes
Voltage rating	230 V

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Polycarbonate

CERTIFICATES

Degree of protection (IP)	IP66
Impact resistance	IK10
Class of protection	I
Light source protection	Yes
CE	Yes


LIGHT DATA

Light distribution	Wide beam
Light distribution	DI

MATERIALS

Product code	Light source	Lamp holder	Light source power [W]	Type of equipment	Ingiter included	Ignitor/ starter	Louwer/ shutter	Color	Energy class	CNBOP	We [
PX3000101	A60	E27	1×60	-	No	Not required	OPAL	White	-	No	1
PX3000108	TC-TSE	E27	2×20	-	No	Not required	OPAL	White	A	No	1
PX3000115	TC-D	G24d-2	1×18	VVG	Yes	Conventional	OPAL	White	A	No	2
PX3000122	TC-D	G24d-2	2×18	VVG	Yes	Conventional	OPAL	White	A	No	2
PX3000129	TC-D	G24d-3	1×26	VVG	Yes	Conventional	OPAL	White	A	No	2
PX3000136	TC-D	G24d-3	2×26	VVG	Yes	Conventional	OPAL	White	A	No	2
PX3000143	T-R	G10q	1×22	VVG	Yes	Conventional	OPAL	White	A	No	2
PX3000150	TC-2D	GR10q	1×28	EVG	No	Not required	OPAL	White	A	No	2
PX3000157	T-R	G10q	1×32	VVG	Yes	Conventional	OPAL	White	A	No	2
PX3000164	TC-2D	GR10q	1×38	EVG	No	Not required	OPAL	White	A	No	2
PX3000171	TC-DE	G24q-2	1×18	EVG	No	Not required	OPAL	White	A	Yes	1
PX3000178	TC-DE	G24q-2	2×18	EVG	No	Not required	OPAL	White	A	Yes	1
PX3000185	TC-DE	G24q-3	1×26	EVG	No	Not required	OPAL	White	A	Yes	2
PX3000192	TC-DE	G24q-3	2×26	EVG	No	Not required	OPAL	White	A	Yes	2
PX3000195	TC-L	2G11	1×18	EVG	No	Not required	OPAL	White	A	No	1
PX3000199	TC-L	2G11	2×18	EVG	No	Not required	OPAL	White	A	No	1
PX3001101	A60	E27	1×60	-	No	Not required	Transparent plastic	None	-	No	1

Product code	Light source	Lamp holder	Light source power [W]	Type of equipment	Ingiter included	Ignitor/ starter	Louwer/ shutter	Color	Energy class	CNBOP	Weight [kg]
PX3001108	TC-TSE	E27	2x20	-	No	Not required	Transparent plastic	None	A	No	2
PX3001115	TC-D	G24d-2	1x18	VVG	Yes	Conventional	Transparent plastic	None	A	No	2
PX3001122	TC-D	G24d-2	2x18	VVG	Yes	Conventional	Transparent plastic	None	A	No	2
PX3001129	TC-D	G24d-3	1x26	VVG	Yes	Conventional	Transparent plastic	None	A	No	2
PX3001136	TC-D	G24d-3	2x26	VVG	Yes	Conventional	Transparent plastic	None	A	No	2
PX3001143	T-R	G10q	1x22	VVG	Yes	Conventional	Transparent plastic	None	A	No	2
PX3001150	TC-2D	GR10q	1x28	EVG	No	Not required	Transparent plastic	None	A	No	2
PX3001157	T-R	G10q	1x32	VVG	Yes	Conventional	Transparent plastic	None	A	No	2
PX3001164	TC-2D	GR10q	1x38	EVG	No	Not required	Transparent plastic	None	A	No	2
PX3001171	TC-DE	G24q-2	1x18	EVG	No	Not required	Transparent plastic	None	A	Yes	1
PX3001178	TC-DE	G24q-2	2x18	EVG	No	Not required	Transparent plastic	None	A	Yes	1
PX3001185	TC-DE	G24q-3	1x26	EVG	No	Not required	Transparent plastic	None	A	Yes	2
PX3001192	TC-DE	G24q-3	2x26	EVG	No	Not required	Transparent plastic	None	A	Yes	2
PX3001195	TC-L	2G11	1x18	EVG	No	Not required	Transparent plastic	None	A	No	1
PX3001199	TC-L	2G11	2x18	EVG	No	Not required	Transparent plastic	None	A	No	1
PX3002101	A60	E27	1x60	-	No	Not required	OPAL	Grey	-	No	1
PX3002108	TC-TSE	E27	2x20	-	No	Not required	OPAL	Grey	A	No	1
PX3002115	TC-D	G24d-2	1x18	VVG	Yes	Conventional	OPAL	Grey	A	No	2
PX3002122	TC-D	G24d-2	2x18	VVG	Yes	Conventional	OPAL	Grey	A	No	2
PX3002129	TC-D	G24d-3	1x26	VVG	Yes	Conventional	OPAL	Grey	A	No	2
PX3002136	TC-D	G24d-3	2x26	VVG	Yes	Conventional	OPAL	Grey	A	No	2
PX3002143	T-R	G10q	1x22	VVG	Yes	Conventional	OPAL	Grey	A	No	2
PX3002150	TC-2D	GR10q	1x28	EVG	No	Not required	OPAL	Grey	A	No	2
PX3002157	T-R	G10q	1x32	VVG	Yes	Conventional	OPAL	Grey	A	No	2
PX3002164	TC-2D	GR10q	1x38	EVG	No	Not required	OPAL	Grey	A	No	2
PX3002171	TC-DE	G24q-2	1x18	EVG	No	Not required	OPAL	Grey	A	Yes	1
PX3002178	TC-DE	G24q-2	2x18	EVG	No	Not required	OPAL	Grey	A	Yes	1
PX3002185	TC-DE	G24q-3	1x26	EVG	No	Not required	OPAL	Grey	A	Yes	2
PX3002192	TC-DE	G24q-3	2x26	EVG	No	Not required	OPAL	Grey	A	Yes	2
PX3002195	TC-L	2G11	1x18	EVG	No	Not required	OPAL	Grey	A	No	1
PX3002199	TC-L	2G11	2x18	EVG	No	Not required	OPAL	Grey	A	No	1

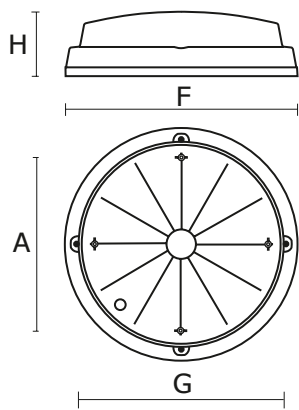

DIMENSIONS

H [mm]	F [mm]
110	400

H = Height / Depth | F = Outer diameter

MOUNTING HOLES

A [mm]
298

A = Spacing length