



POP II Ceiling version



Slim luminaire of delicate form with a frame made of aluminum, designed for ceiling mounting. Available in versions for T5 fluorescent lamps and LED of reputable manufacturers. High quality power supplier provide power factor of $\cos \phi = 0,95$.

Materials: electrostatically painted aluminum profile (standard color: grey), opal diffuser made of PMMA

Installation: ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	T5
Lamp holder	G5
Type of equipment	EVG
Voltage rating	230 V

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Aluminum

INFOMATIONS

Color	Grey
-------	------

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	I
Light source protection	Yes
Energy class	A
CE	Yes

LIGHT DATA


Light distribution	DI
--------------------	----

OPTICAL DATA

Louver/shutter	OPAL
Diffuser color	White
Diffuser material	Opal/mat plastic
Reflector	None

MATERIALS

Product code	Light source power [W]	Weight [kg]
PX0831157	2×39	3.0
PX0831164	2×54	5.0
PX0831185	4×14	4.4
PX0831192	4×24	4.4

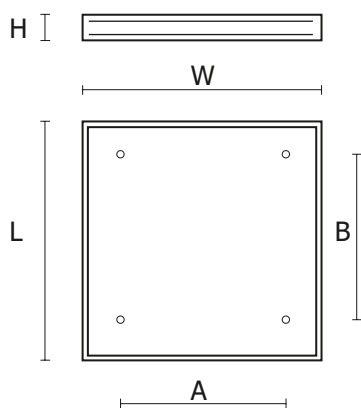

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX0831157	900	100	45
PX0831164	1200	220	45
PX0831185	595	595	45
PX0831192	595	595	45

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B [mm]
PX0831157	594	54
PX0831164	805	105
PX0831185	400	400
PX0831192	400	400

A = Spacing length | B = Spacing width