



## Alfa



High Bay lighting luminaire designed for efficient heat dissipation. Rapid quick-release connector allows a an efficient installation of the luminaire.

**Materials:** aluminum housing (standard color: grey), reflector made of polished aluminum, transparent tempered glass, nickel plated steel wire grid

**Installation:** suspended

**Accessories:** glass, protective grid, CLA device

### ELECTRICAL DATA

Type of equipment	VVG
Ingiter included	Yes
Voltage rating	230 V
For through out powering	No

### MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum
Electrical track connection	No

### INFOMATIONS

Color	Black
-------	-------

### CERTIFICATES

Degree of protection (IP)	IP65
Impact resistance	IK10
Class of protection	I
CE	Yes
PZH	Yes
For ceiling installation, fire class "F" (L)	Yes

### LIGHT DATA

Light distribution	DI
--------------------	----


### OPTICAL DATA

Reflector	High gloss
-----------	------------

### MATERIALS

Product code	Light source	Lamp holder	Light source power [W]	Light source included	Beam angle [°]	Info	Energy class	Weight [kg]
PX2060085	HIE	E27	1×150	No	90	-	A	6.0
PX2060101	HIE/HSE	E40	1×250	No	-	-	A	6.1
PX2060122	HIE/HSE	E40	1×400	No	-	-	A	8.5
PX2060201	HIE	E40	1×250	Yes	-	-	A	6.3
PX2060222	HIE	E40	1×400	Yes	-	-	A	8.9
PX2060301	HSE	E40	1×250	Yes	-	-	A+	6.3
PX2060322	HSE	E40	1×400	Yes	-	-	A+	8.1
PX2060090	HIE	E27	1×150	No	26	-	A	6.0
PX2060070	HIE	E27	1×70	No	-	-	A	6.0
PX2060065	-	E27	0×0	No	-	Obudowa	A	6.0

## DIMENSIONS

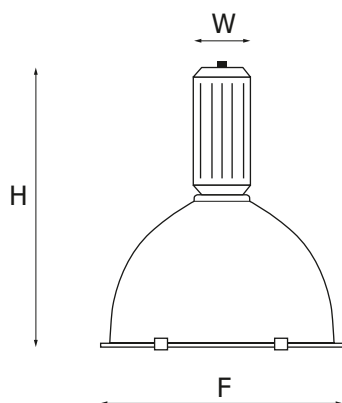

W [mm]	H [mm]	F [mm]
140	600	486

W = Width | H = Height / Depth | F = Outer diameter

## ACCESSORIES

### Diffusers



Alfa High-Bay Transparent glass Alu Ø485 mm for 150W/250W and 400W



Alfa High-Bay Protective grid Alu Ø485 mm for 150W/250W and 400W

### Optical elements

Alfa Highbay Reflector DECO



Alfa High-Bay Reflector Alu Ø485 mm for 150W/250W and 400W