



Milena LED



Modern LED lighting luminaire with high luminous efficiency and subtle design, is an ideal application for representative rooms.

Materials: powder painted aluminum profile (standard color: grey and black), microprismatic MPRM diffuser

Installation: suspended

Accessories: suspension included

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	LG5630
Power factor	0.98
SELV	Yes

MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum

INFROMATIONS

Color	Milticolor
-------	------------

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes

LIGHT DATA


Light color	White
Color rendering index	80
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Louver/shutter	MPRM
Diffuser color	None
Diffuser material	Prismatic plastic
Reflector	None

MATERIALS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Weight [kg]
PX4020101	1×47	3650	78	3000	3.5
PX4020108	1×68	5550	82	3000	4.5
PX4020115	1×47	3750	80	4000	3.5
PX4020122	1×68	5650	83	4000	4.5

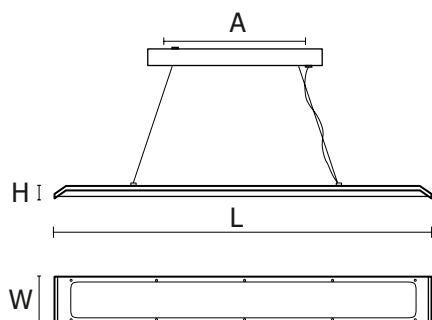

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX4020101	1135	144	30
PX4020108	1645	144	30
PX4020115	1135	144	30
PX4020122	1645	144	30

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]
PX4020101	400
PX4020108	600
PX4020115	400
PX4020122	600

A = Spacing length