



## Poker



A simple, functional and universal fluorescent lighting batten. CS version (with diffuser).

**Materials:** powder painted housing made of steel sheets (standard color: white), ABS end caps

**Installation:** ceiling mounted

**Power:** 230 V

### ELECTRICAL DATA

Light source	T8
Lamp holder	G13
Type of equipment	EVG
Voltage rating	230 V

### MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

### INFROMATIONS

Color	White
-------	-------

### MATERIALS


Product code	Light source power [W]	Weight [kg]
PX1803157	1×18	1.01
PX1803164	1×30	1.27
PX1803171	1×36	1.45
PX1803178	1×58	2.00
PX1803185	2×18	1.10
PX1803192	2×30	1.88
PX1803199	2×36	2.07
PX1803206	2×58	2.84

### CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Energy class	A
CE	Yes
CNBOP	Yes

### LIGHT DATA

Light distribution	DI
--------------------	----

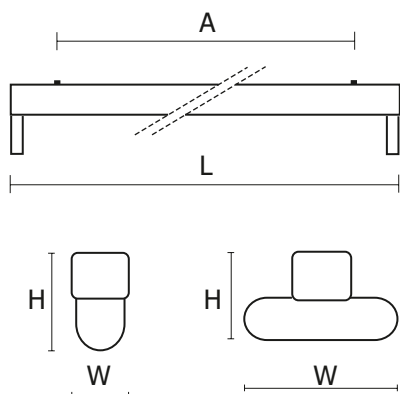

## DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX1803157	618	50	86
PX1803164	923	50	86
PX1803171	1228	50	86
PX1803178	1528	50	86
PX1803185	618	128	74
PX1803192	923	128	74
PX1803199	1228	128	74
PX1803206	1528	128	74

L = Length | W = Width | H = Height / Depth

## MOUNTING HOLES

Product code	A [mm]
PX1803157	486
PX1803164	791
PX1803171	1096
PX1803178	1396
PX1803185	486
PX1803192	791
PX1803199	1096
PX1803206	1396

A = Spacing length

## ACCESSORIES

### Diffusers



Fibra III, Prima, Poker Protective grid

### Optical elements



Poker White reflector

## Optical elements



Poker Aluminum reflector

---