



Finestra LED



Energy-saving decorative lighting luminaire of modern and elegant shape equipped with LED light source from renowned producers. Finestra by universal form and type of assembly is suitable for public spaces, conference rooms, offices, communications, halls, stairways. The first-class AC power supply of renowned brands achieves $\cos \phi > 0,95$. This luminaire perfectly complements the rest of the Finestra series of luminaires.

Materials: powder painted steel housing (standard color: grey), microprismatic MPRM or prismatic PRM diffuser

Installation: ceiling mounted, suspended, wall mounted

Accessories: simple and electric suspension

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
SELV	Yes

MECHANICAL DATA

Type of installation	Universal mounting
Housing material	Steel sheet

INFORMATIONS

Color	Grey
-------	------

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes

LIGHT DATA


Light color	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Louver/shutter	MPRM
Diffuser color	None
Diffuser material	Prismatic plastic
Reflector	Mat

MATERIALS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Weight [kg]
PX0906263	1×11	82	900	3000	3.4
PX0906268	1×11	82	900	4000	3.4
PX0906283	1×24	73	1750	3000	3.8
PX0906288	1×24	75	1800	4000	3.8

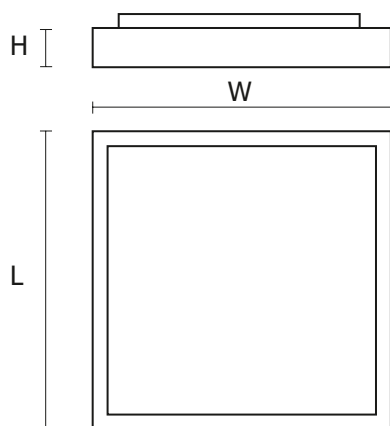

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX0906263	307	307	68
PX0906268	307	307	68
PX0906283	407	407	65
PX0906288	407	407	65

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

A [mm]	B [mm]
200	200

A = Spacing length | B = Spacing width

ACCESSORIES

Electric elements



Electrical suspension

Installation elements



Simple suspension