



Fuzo LED



LED luminaire for universal use. Made with use of energy-saving LEDs of high luminous efficiency from reputable manufacturers. FUZO have been provided with power supply with power factor $\cos \phi > 0,95$. Available with housing of different colors, suitable for any interior color. Application: offices, conference rooms, corridors

Materials: frame made of electrostatically painted sheet aluminium (standard – grey). Frame can be painted in any RAL color. White housing made of sheet steel. MPRM prismatic diffuser.

Installation: suspended ceiling with visible supporting structure or plaster cardboard ceiling

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	LG6030
SELV	Yes

MECHANICAL DATA

Type of installation	Recessed
Housing material	Steel sheet

INFROMATIONS

Color	Grey
-------	------

CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
Light source protection	Yes
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA

Light color	White
Color rendering index	80
Light distribution	DI
Class of luminaire	I


OPTICAL DATA

Diffuser color	None
----------------	------

MATERIALS

Product code	Light source power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Info	Energy class	Weight [kg]
PX2065315	1x11	MPRM	850	77	3000	square	A+	1.7
PX2065415	1x11	MPRM	900	82	4000	square	A+	1.7
PX2065322	1x22	MPRM	1500	68	3000	Kwadrat	A+	1.7
PX2065422	1x22	MPRM	1550	70	4000	Kwadrat	A+	1.7
PX2065330	1x21	MPRM	1700	81	3000	rectangle	A+	2.3
PX2065430	1x21	MPRM	1750	83	4000	rectangle	A+	2.3
PX2065340	1x31	MPRM	2700	87	3000	square	A+	3.0
PX2065440	1x31	MPRM	2750	89	4000	square	A+	3.0
PX2065444	1x44	MPRM	4250	97	3000	Kwadrat	A+	5.0
PX2065448	1x44	MPRM	4450	101	4000	Kwadrat	A+	5.0
PX2065451	1x20	MPRM	1400	70	3000	LIGHTING LINE	A+	1.7

Product code	Light source power [W]	Louver/shutter	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Color temperature [K]	Info	Energy class	Weight [kg]
PX2065458	1x20	MPRM	1450	73	4000	LIGHTING LINE	A+	1.7
PX2065465	1x28	MPRM	2100	75	3000	LIGHTING LINE	A+	2.6
PX2065472	1x28	MPRM	2150	77	4000	LIGHTING LINE	A+	2.6
PX2065479	1x38	MPRM	2850	75	3000	LIGHTING LINE	A+	3.5
PX2065486	1x38	MPRM	2900	76	4000	LIGHTING LINE	A+	3.5
PX2065101	1x11	OPAL	850	77	3000	Kwadrat OPAL	A+	1.7
PX2065108	1x11	OPAL	850	77	4000	Kwadrat OPAL	A+	1.7
PX2065115	1x22	OPAL	1450	66	3000	Kwadrat OPAL	A+	1.7
PX2065122	1x22	OPAL	1500	68	4000	Kwadrat OPAL	A+	1.7
PX2065129	1x21	OPAL	1650	79	3000	Prostokąt OPAL	A+	2.3
PX2065136	1x21	OPAL	1700	81	4000	Prostokąt OPAL	A+	2.3
PX2065143	1x31	OPAL	2600	84	3000	Kwadrat OPAL	A+	3.0
PX2065150	1x31	OPAL	2650	85	4000	Kwadrat OPAL	A+	3.0
PX2065157	1x44	OPAL	4300	98	3000	Kwadrat OPAL	A+	5.0
PX2065164	1x44	OPAL	4400	100	4000	Kwadrat OPAL	A+	5.0
PX2065171	1x20	OPAL	1200	60	3000	Linia OPAL	A	1.7
PX2065178	1x20	OPAL	1200	60	4000	Linia OPAL	A	1.7
PX2065185	1x28	OPAL	1750	63	3000	Linia OPAL	A	2.6
PX2065192	1x28	OPAL	1800	64	4000	Linia OPAL	A	2.6
PX2065199	1x38	OPAL	2350	62	3000	Linia OPAL	A	3.5
PX2065206	1x38	OPAL	2400	63	4000	Linia OPAL	A	3.5

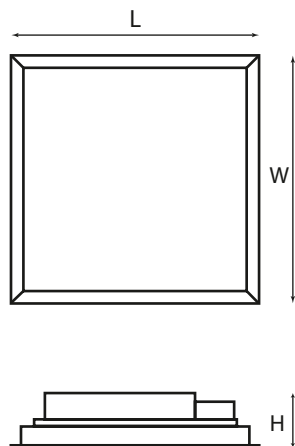

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]	C [mm]	D [mm]
PX2065315	240	240	82	230	230
PX2065415	240	240	82	230	230
PX2065322	240	240	82	230	230
PX2065422	240	240	82	230	230
PX2065330	420	240	82	410	230
PX2065430	420	240	82	410	230
PX2065340	420	420	82	410	410
PX2065440	420	420	82	410	410
PX2065444	595	595	52	585	585
PX2065448	595	595	52	585	585
PX2065451	618	91	82	600	73
PX2065458	618	91	82	600	73
PX2065465	918	91	82	900	73
PX2065472	918	91	82	900	73
PX2065479	1218	91	82	1200	73
PX2065486	1218	91	82	1200	73
PX2065101	240	240	82	230	230
PX2065108	240	240	82	230	230
PX2065115	240	240	82	230	230
PX2065122	240	240	82	230	230
PX2065129	420	240	82	410	230
PX2065136	420	240	82	410	230
PX2065143	420	420	82	410	410
PX2065150	420	420	82	410	410
PX2065157	595	595	52	585	585
PX2065164	595	595	52	585	585
PX2065171	618	91	82	600	73
PX2065178	618	91	82	600	73
PX2065185	918	91	82	900	73
PX2065192	918	91	82	900	73
PX2065199	1218	91	82	1200	73
PX2065206	1218	91	82	1200	73

L = Length | W = Width | H = Height / Depth | C = Installation length | D = Installation width