



## Finestra Ring



Universal plafond for compact light sources. Round shape and minimalistic form allows for installation inside public spaces as well as private apartments and houses. Pendant version is available by using additional accessories.

**Materials:** powder painted aluminum housing (standard color: grey), base made of steel sheet, opal diffuser made of PMMA

**Installation:** ceiling mounted, suspended

**Power:** 230 V

### ELECTRICAL DATA

Type of equipment	EVG
Voltage rating	230 V
SELV	Yes

### MECHANICAL DATA

Type of installation	Universal mounting
Housing material	Aluminum

### INFROMATIONS

Color	Grey
-------	------

### CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
CE	Yes
CNBOP	Yes

### LIGHT DATA


Light color	White
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

### OPTICAL DATA

Louver/shutter	OPAL
Diffuser color	White
Diffuser material	Opal/mat plastic

### MATERIALS

Product code	Light source	Lamp holder	Light source power [W]	Energy class	Weight [kg]
PX0907133	FC	2GX13	1×22	A+	2.7
PX0907008	TC-L	2G11	2×18	A	2.7
PX0907144	TC-L	2G11	2×18	A	2.7
PX0907155	TC-L	2G11	2×24	A	2.7
PX0907307	TC-L	2G11	2×36	A	4.8
PX0907344	FC	2GX13	1×55	A+	4.0
PX0907355	TC-L	2G11	4×18	A	4.0
PX0907366	TC-L	2G11	4×24	A	4.0
PX0907001	FC	2GX13	1×22	A+	2.7

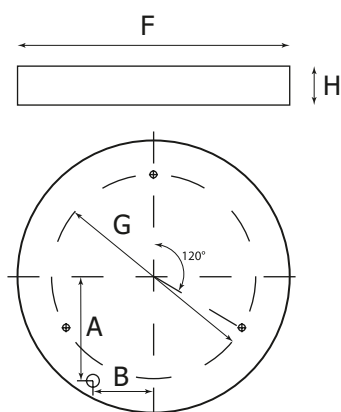

## DIMENSIONS

Product code	H [mm]	F [mm]
PX0907133	75	440
PX0907008	75	320
PX0907144	75	440
PX0907155	75	440
PX0907307	75	520
PX0907344	75	520
PX0907355	75	520
PX0907366	75	520
PX0907001	75	320

H = Height / Depth | F = Outer diameter

## MOUNTING HOLES

Product code	A [mm]	B [mm]
PX0907133	123.0	143
PX0907008	123.0	143
PX0907144	123.0	143
PX0907155	123.0	143
PX0907307	5.5	222
PX0907344	5.5	222
PX0907355	5.5	222
PX0907366	5.5	222
PX0907001	123.0	143

A = Spacing length | B = Spacing width

## ACCESSORIES

### Installation elements



Finestra Ring Suspension set 1,5m 5x0,75mm2