
FPXF LIGHTING



Circle





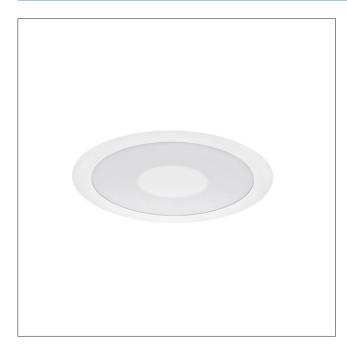



High-grade luminaire with a subtle and evenly distributed light beam. Circle is equipped with opal diffuser blending harmoniously with the surface of the ceiling. Round T5 lamps and LED light sources versions are available. Perfect choice for offices, corridors and lobbies.

Materials: powder painted housing made of steel sheets (standard color: white), opal diffuser made of PMMA

Installation: for cardboard ceiling, for 600x600 ceiling

Power: 230 V

ELECTRICAL DATA

Light source	FC-T5
Lamp holder	2GX13
Number of light sources	1
Light source power	55W
Type of equipment	EVG
Voltage rating	230 V

MECHANICAL DATA

Type of installation	Recessed
Housing material	Steel sheet

INFROMATIONS

Color	White

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	1
Energy class	A+
CE	Yes

LIGHT DATA

Lio	ht (distribution	DI
LIU	IIIL (aistribution	


OPTICAL DATA


Louver/shutter	OPAL
Diffuser color	White
Diffuser material	Opal platic

MATERIALS

Product code		Light source power [W]	Info	Weight [kg]	
	PX2063915	1×55	600x600	4.2	
	PX2063922	1×55	G/K	3.0	

FPXF LIGHTING





DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]	F [mm]	G [mm]	D [mm]
PX2063915	595	595	63	450	170	450
PX2063922	450	450	63	486	171	449

 $L = Length \mid W = Width \mid H = Height / Depth \mid F = Outer \, diameter \mid G = Inner \, diameter \mid D = Installation \, width \, diameter \mid D = Installation \, width \, diameter \, diamet$