

Solid IP65 LED



Economically effective LED luminaire of high endurance designed for clean environments and industrial areas with need for higher protection rate. Sandblasted and tempered glass provides a high degree of protection of light sources and uniform light distribution.

Materials: housing made of galvanized steel electrostatically painted in white, sandblasted and tempered glass

Installation: 600x600 suspended ceilings with visible supporting structure

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Light source power	45W
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Luminaire power	45 W
Type of LED	LG6030
SELV	Yes

MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Steel sheet

INFROMATIONS

Color	White
-------	-------

MATERIALS

Product code	Light source power [W]	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]
PX2066030	1x45	3954	88	3000
PX2066040	1x45	4076	91	4000

CERTIFICATES


Degree of protection (IP)	IP65
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes

LIGHT DATA

Light color	White
Color rendering index	80
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Diffuser color	White
Diffuser material	Opal glass

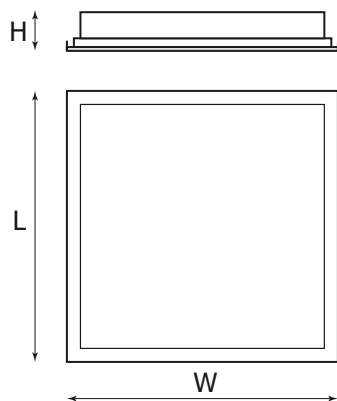

DIMENSIONS

L [mm]	W [mm]	H [mm]
596	596	91

L = Length | W = Width | H = Height / Depth