




Sun LED



Modern luminaire designed for LED light sources of high lighting efficiency. SUN LED has an aesthetic appeal, it's light and quick in installation. It also connect high lighting performance with low level of Unified Glare Rating (UGR). SUN LED has been equipped with a power supply with power factor $\cos \phi > 0,95$. DALI ballast – on request. Product is designed for offices, conference rooms and passageways.

Materials: Housing made of steel, electrostatically painted in white (standard color) with all other RAL colors available. Microprismatic diffuser (MPRM).

Installation: In the modular ceiling with visible grid, or into plaster-cardboard ceiling, suspended, surface mounted

Accessories: Plaster-cardboard frame to 600x600 version

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	230 V
Light source included	Yes
Type of LED	LG6030
Power factor	0.97
SELV	Yes

MECHANICAL DATA

Housing material	Steel sheet
------------------	-------------

INFROMATIONS

Color	White
Operating temperature range	0 ... 40 °
Dimmable	Yes

CERTIFICATES

Degree of protection (IP)	IP44
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA

Light color	White
Color rendering index	80
Light distribution	Mid beam
Light distribution	DI



OPTICAL DATA

Louver/shutter	MPRM
Diffuser color	None
Diffuser material	Prismatic plastic
Reflector	High gloss

MATERIALS

Product code	Light source power [W]	Type of installation	Luminaire luminous flux [lm]	Luminaire luminous efficacy [lm/W]	Color temperature [K]	Info	Weight [kg]
PX2065557	2x18	For 600x600 ceiling	3080	86	3000	600x600	4.3
PX2065564	2x18	For 600x600 ceiling	3135	87	4000	600x600	4.3
PX2065571	1x36	For 600x600 ceiling	3190	89	3000	1196x296	4.4
PX2065578	1x36	For 600x600 ceiling	3245	90	4000	1196x296	4.4

Product code	Light source power [W]	Type of installation	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Color temperature [K]	Info	Weight [kg]
PX2065585	2×18	Suspended	3080	86	3000	Suspended 600x600	4.3
PX2065592	2×18	Suspended	3135	87	4000	Suspended 600x600	4.3
PX2065599	1×36	Suspended	3190	89	3000	Suspended 1196x296	4.4
PX2065606	1×36	Suspended	3245	90	4000	Suspended 1196x296	4.4
PX2065501	2×22	For 600x600 ceiling	4125	94	3000	600x600	4.3
PX2065508	2×22	For 600x600 ceiling	4235	96	4000	600x600	4.3
PX2065515	1×44	For 600x600 ceiling	4125	94	3000	1196x296	4.4
PX2065522	1×44	For 600x600 ceiling	4235	96	4000	1196x296	4.4
PX2065529	2×22	Suspended	4125	94	3000	Suspended 600x600	4.3
PX2065536	2×22	Suspended	4235	96	4000	Suspended 600x600	4.3
PX2065543	1×44	Suspended	4125	94	3000	Suspended 1196x296	4.4
PX2065550	1×44	Suspended	4235	96	4000	Suspended 1196x296	4.4

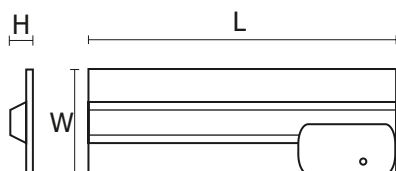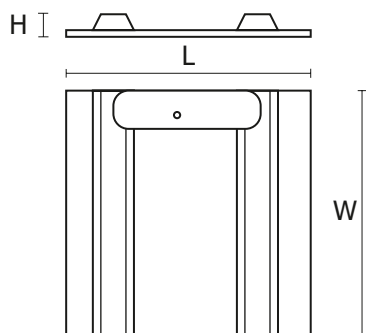

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX2065557	596	596	47
PX2065564	596	596	47
PX2065571	1196	296	47
PX2065578	1196	296	47
PX2065585	596	596	47
PX2065592	596	596	47
PX2065599	1196	296	47
PX2065606	1196	296	47
PX2065501	596	596	47
PX2065508	596	596	47
PX2065515	1196	296	47
PX2065522	1196	296	47
PX2065529	596	596	47
PX2065536	596	596	47
PX2065543	1196	296	47
PX2065550	1196	296	47

L = Length | W = Width | H = Height / Depth

ACCESSORIES

Installation elements

Cardboard installation frame for 600x600 version