



Presto NT



Luminaire from Presto series for surface mounting with direct light beam which offers two efficient optical systems: parabolic louvers and opal diffuser. Thanks to the linear joints (in the set) the luminaire can be easily connected in line. The luminaire can be completed with spot lights for low voltage halogen or LED light sources.

Materials: powder painted steel profile (standard color: grey), parabolic louvre made of polished, anodized steel, opal diffuser made of polycarbonate

Installation: ceiling mounted

Power: 230 V

ELECTRICAL DATA

Light source	T5
Lamp holder	G5
Type of equipment	EVG
Voltage rating	230 V

MECHANICAL DATA

Type of installation	Ceiling mounted
Housing material	Steel sheet

INFROMATIONS

Color	Grey
-------	------

MATERIALS

Light source power [W]	Weight [kg]	PAR	OPAL
1×14	2.5	PX0761101	PX0760101
1×21	3.3	PX0761108	PX0760108
1×28	4.2	PX0761115	PX0760115
1×35	5.0	PX0761122	PX0760122
1×24	2.5	PX0761157	PX0760157
1×39	3.3	PX0761164	PX0760164
1×49	5.0	PX0761171	PX0760171
1×54	4.2	PX0761178	PX0760178
1×80	5.0	PX0761185	PX0760185
2×14	3.0	PX0761129	PX0760129
2×21	4.0	PX0761136	PX0760136
2×28	5.0	PX0761143	PX0760143
2×35	6.0	PX0761150	PX0760150
2×24	3.0	PX0761192	PX0760192
2×39	4.0	PX0761199	PX0760199
2×49	6.0	PX0761206	PX0760206
2×54	5.0	PX0761213	PX0760213
2×80	6.0	PX0761220	

CERTIFICATES


Degree of protection (IP)	IP20
Class of protection	I
Energy class	A
CE	Yes
CNBOP	Yes

LIGHT DATA

Light distribution	DI
--------------------	----

OPTICAL DATA

Reflector	White
-----------	-------

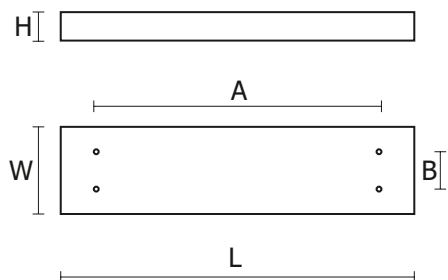

DIMENSIONS

L [mm]	W [mm]	H [mm]	PAR	OPAL
630	152	54	PX0761101 PX0761157	PX0760101 PX0760157
930	152	54	PX0761108 PX0761164	PX0760108 PX0760164
1230	152	54	PX0761115 PX0761178	PX0760115 PX0760178
1530	152	54	PX0761122 PX0761171 PX0761185	PX0760122 PX0760171 PX0760185
630	228	54	PX0761129 PX0761192	PX0760129 PX0760192
930	228	54	PX0761136 PX0761199	PX0760136 PX0760199
1230	228	54	PX0761143 PX0761213	PX0760143 PX0760213
1530	228	54	PX0761150 PX0761206 PX0761220	PX0760150 PX0760206

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

A [mm]	B	PAR	OPAL
410	-	PX0761101 PX0761157	PX0760101 PX0760157
658	-	PX0761108 PX0761164	PX0760108 PX0760164
959	-	PX0761115 PX0761178	PX0760115 PX0760178
1197	-	PX0761122 PX0761171 PX0761185	PX0760122 PX0760171 PX0760185
410	115 mm	PX0761129 PX0761192	PX0760129 PX0760192

A [mm]	B	PAR	OPAL
658	115 mm	PX0761136 PX0761199	PX0760136 PX0760199
959	115 mm	PX0761143 PX0761213	PX0760143 PX0760213
1197	115 mm	PX0761150 PX0761206 PX0761220	PX0760150 PX0760206

A = Spacing length | B = Spacing width

ACCESSORIES

Installation elements

Presto NT Spacing sleeve
