



Velo

ikony

New version of very popular Velo luminaire made for T5 tubes. Modification has been made with subtle aluminum profile instead of steel sheets and with adding the possibility for inline installation. Thanks to its shape Velo fits perfectly in corners and thus is great for illumination in corridors, staircases and other places with limited space.

Note: Through wiring on request

Materials: electrostatically painted aluminum profile (standard color: grey), microprismatic diffuser (MPRM) made of PMMA or opal diffuser (OPAL) made of polycarbonate.

Installation: wall mounted, suspended

Accessories: suspension (simple, electric), linear joint, end cap

Power: 230 V

ELECTRICAL DATA

Light source	T5
Lamp holder	G5
Number of light sources	1
Type of equipment	EVG
Voltage rating	230 V
For through out powering	Yes

MECHANICAL DATA

Housing material	Aluminum
------------------	----------

INFROMATIONS

Color	Grey
-------	------

CERTIFICATES

Degree of protection (IP)	IP20
Class of protection	I
Light source protection	Yes
Energy class	A
CE	Yes
For ceiling installation, fire class "F" (L)	Yes

LIGHT DATA

Light distribution	DI
Class of luminaire	I

OPTICAL DATA


Reflector	High gloss
-----------	------------

MATERIALS

Light source power [W]	Type of installation	Designed for light-line	Info	Weight [kg]	OPAL	MPRM
1x14	Wall mounted	Yes	NT	1.5	PX4022065	
1x24	Wall mounted	Yes	NT	1.5	PX4022066	
1x28	Wall mounted	Yes	NT	2.7	PX4022071	
1x35	Wall mounted	Yes	NT	2.7	PX4022078	
1x49	Wall mounted	Yes	NT	3.3	PX4022085	
1x54	Wall mounted	Yes	NT	3.3	PX4022092	
1x80	Wall mounted	Yes	NT	3.3	PX4022099	
1x14	Wall mounted	No	NT	1.5		PX4022100
1x24	Wall mounted	No	NT	1.5		PX4022101
1x28	Wall mounted	No	NT	2.7		PX4022106
1x35	Wall mounted	No	NT	2.7		PX4022113
1x49	Wall mounted	No	NT	3.3		PX4022120

Light source power [W]	Type of installation	Designed for light-line	Info	Weight [kg]	OPAL	MPRM
1×54	Wall mounted	No	NT	3.3		PX4022127
1×80	Wall mounted	No	NT	3.3		PX4022134
1×14	Suspended	Yes	-	1.5	PX4022001	
1×24	Suspended	Yes	-	1.5	PX4022002	
1×28	Suspended	Yes	-	2.7	PX4022006	
1×35	Suspended	Yes	-	2.7	PX4022015	
1×49	Suspended	Yes	-	3.3	PX4022022	
1×54	Suspended	Yes	-	3.3	PX4022008	
1×80	Suspended	Yes	-	3.3	PX4022029	
1×14	Suspended	No	-	1.5		PX4022030
1×24	Suspended	No	-	1.5		PX4022031
1×28	Suspended	No	-	2.7		PX4022036
1×35	Suspended	No	-	2.7		PX4022043
1×49	Suspended	No	-	3.3		PX4022050
1×54	Suspended	No	-	3.3		PX4022057
1×80	Suspended	No	-	3.3		PX4022064

DIMENSIONS

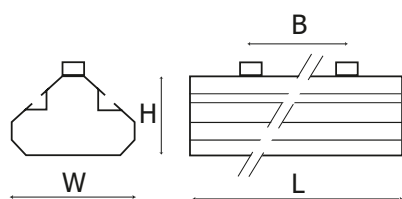

L [mm]	W [mm]	H [mm]	OPAL	MPRM
583	101	64	PX4022065	PX4022100
			PX4022066	PX4022101
			PX4022001	PX4022030
			PX4022002	PX4022031
1183	101	64	PX4022071	PX4022106
			PX4022092	PX4022127
			PX4022006	PX4022036
			PX4022008	PX4022057
1483	101	64	PX4022078	PX4022113
			PX4022085	PX4022120
			PX4022099	PX4022134
			PX4022015	PX4022043
			PX4022022	PX4022050
			PX4022029	PX4022064

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

A [mm]	OPAL	MPRM
383	PX4022065	PX4022100
	PX4022066	PX4022101
	PX4022001	PX4022030
	PX4022002	PX4022031
783	PX4022071	PX4022106
	PX4022078	PX4022113
	PX4022006	PX4022036
	PX4022015	PX4022043
1083	PX4022085	PX4022120
	PX4022092	PX4022127
	PX4022099	PX4022134
	PX4022022	PX4022050
	PX4022008	PX4022057
	PX4022029	PX4022064

A = Spacing length

ACCESSORIES

Electric elements



Electrical suspension

Structural elements



Velo Końcówka

Connecting elements



Sigma/Velo/VIP/VIP G/K Invisible linear joint Set (2 pcs)

Installation elements



Simple suspension
