



Roma IP65



Series of luminaires recommended for industrial areas and for clean rooms where the higher IP protection degree is required. The following versions are available: with louver and transparent (PMMA) diffuser, with louver and tempered glass (SH) diffuser or, if need, without louver and with opal (PMMA) diffuser. The luminaire can be mounted into suspended 600x600 ceiling with a visible grid.

Materials: powder painted housing made of galvanized steel sheets (standard color: white), reflector made of full or perforated steel sheet painted in white, PMMA diffuser or transparent tempered glass, polycarbonate diffuser PC on request

Installation: for 600x600 ceiling, ceiling mounted

ELECTRICAL DATA

Type of equipment	EVG
Voltage rating	230 V

MECHANICAL DATA

Type of installation	For 600x600 ceiling
Housing material	Steel sheet

INFORMATIONS

Color	White
-------	-------

CERTIFICATES

Degree of protection (IP)	IP65
Class of protection	I
Light source protection	Yes
Energy class	A
CE	Yes
PZH	Yes
CNBOP	Yes

LIGHT DATA

Light distribution	DI
--------------------	----


OPTICAL DATA

Reflector	None
-----------	------

MATERIALS

Product code	Light source	Lamp holder	Light source power [W]	Louver/shutter	Weight [kg]
PX1159129	T8	G13	2x18	PAR	3.40
PX1159136	T8	G13	2x36	PAR	6.70
PX1159143	TC-L	2G11	3x36	PAR	6.90
PX1159150	T8	G13	4x18	PAR	6.20
PX1155129	T8	G13	2x18	OPAL	3.40
PX1155136	T8	G13	2x36	OPAL	6.70
PX1155143	TC-L	2G11	3x36	OPAL	6.90
PX1155150	T8	G13	4x18	OPAL	6.20
PX1154422	T8	G13	2x18	PAR SH	4.34
PX1154429	T8	G13	2x36	PAR SH	8.73
PX1154436	TC-L	2G11	3x36	PAR SH	9.10
PX1154443	T8	G13	4x18	PAR SH	8.40

DIMENSIONS

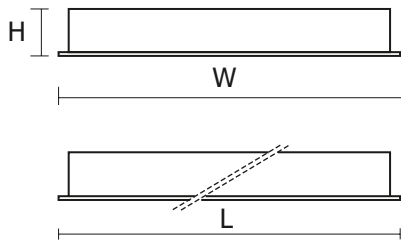

Product code	L [mm]	W [mm]	H [mm]
PX1159129	598	296	112
PX1159136	1191	296	112
PX1159143	595	598	112
PX1159150	595	598	112
PX1155129	598	296	112
PX1155136	1191	296	112
PX1155143	595	598	112
PX1155150	595	598	112
PX1154422	595	296	112
PX1154429	1191	296	112
PX1154436	595	598	112
PX1154443	595	598	112

L = Length | W = Width | H = Height / Depth