



TALEXdriver LCI 65W 150mA–400mA TOP INDUSTRY sl
TOP series

Product description

- Fixed output constant current built-in LED Driver, particularly suitable for industrial applications in tough environments such as cold warehouses or factories with elevated ambient temperatures
- The LED Driver is designed for a life-time stated above under reference conditions and with a failure probability of less than 10 %
- If being operated up to 50 °C ambient temperature for 100,000 h the LED Driver offers a lower failure probability of less than 2.5 %
- Output current adjustable between 150 – 400 mA
- Max. output power 65 W
- Nominal life-time up to 100,000 h
- 8-year guarantee
- Suitable for mains voltage peaks (burst/surge) up to 4 kV
- Extended temperature range of -40 ... +70 °C



Properties

- White slim metal casing
- Type of protection IP20

Functions

- Adjustable output current (I-select resistor)
- Intelligent Temperature Guard (overtemperature protection)
- Short-circuit proof
- Overload protection
- Suitable for emergency escape lighting systems acc. to EN 50172
- Intelligent Voltage Guard (overvoltage indication and undervoltage shutdown)




Standards, page 4

IP20     

TALEXdriver LCI 65W 150mA–400mA TOP INDUSTRY sl TOP series

Technical data

Rated supply voltage	220 – 240 V
Input voltage, AC	198 – 264 V
Input voltage, DC	170 – 280 V
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 48 h
Typ. current (at 230 V, 50 Hz, full load) [Ⓢ]	323 mA
Typ. current (230 V, 0 Hz, full load, 15 % dimming level) [Ⓢ]	56 mA
Leakage current (PE)	< 0.27 mA
Max. input power	72.8 W
Typ. efficiency (at 230 V, 50 Hz, full load) [Ⓢ]	> 90 %
λ (at 230 V, 50 Hz, full load) [Ⓢ]	0.98
THD (at 230 V, 50 Hz, full load) [Ⓢ]	< 5.3 %
Time to light (at 230 V, 50 Hz, full load)	< 0.4 s
Time to light (DC mode)	< 0.4 s
Switchover time (AC/DC)	< 0.4 s
Turn off time (at 230 V, 50 Hz, full load)	< 50 ms
Output current tolerance	$\pm 3 \%$
Output LF current ripple (< 120 Hz)	< 2 %
Max. peak output current	Output current + 18 %
Max. output voltage (no-load voltage)	250 V
Suitable for burst / surge peaks up to (between L - N)	4 kV
Suitable for burst / surge peaks up to (between L/N - PE)	4 kV
Burst / surge peaks output side against PE	< 0.5 kV
Dimensions L x W x H	425 x 30 x 28 mm

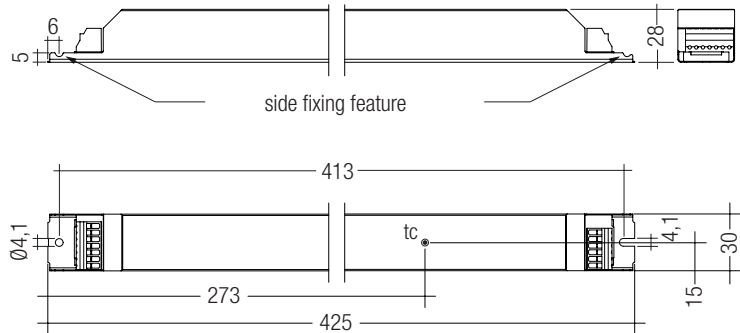

Ordering data

Type	Article number	Packaging carton	Packaging pallet	Weight per pc.
LCI 65W 150mA-400mA TOP INDUSTRY sl	28000537	10 pc(s).	480 pc(s).	0.411 kg

Specific technical data



Type	Output current	Min. forward voltage	Max. forward voltage [Ⓢ]	Max. output power [Ⓢ]	Typ. power consumption (at 230 V, 50 Hz, full load)	Typ. current consumption (at 230 V, 50 Hz, full load)	Max. casing temperature t_c	Ambient temperature t_a max.	I-select resistor value
LCI 65W 150mA-400mA TOP INDUSTRY sl	150 mA	121 V	220 V	33 W	38 W	174 mA	90 °C	-40 ... +75 °C	open
	175 mA	115 V	220 V	39 W	43 W	196 mA	90 °C	-40 ... +75 °C	63.40 k Ω
	200 mA	110 V	220 V	44 W	49 W	219 mA	90 °C	-40 ... +75 °C	54.90 k Ω
	225 mA	105 V	220 V	50 W	55 W	247 mA	90 °C	-40 ... +75 °C	47.50 k Ω
	250 mA	99 V	220 V	55 W	62 W	275 mA	90 °C	-40 ... +70 °C	40.20 k Ω
	275 mA	99 V	220 V	61 W	67 W	295 mA	90 °C	-40 ... +70 °C	34.00 k Ω
	300 mA	98 V	217 V	65 W	71 W	316 mA	90 °C	-40 ... +70 °C	27.40 k Ω
	325 mA	90 V	200 V	65 W	72 W	319 mA	90 °C	-40 ... +70 °C	22.00 k Ω
	350 mA	84 V	186 V	65 W	73 W	323 mA	90 °C	-40 ... +70 °C	12.00 k Ω
	375 mA	78 V	173 V	65 W	73 W	323 mA	90 °C	-40 ... +70 °C	6.19 k Ω
	400 mA	73 V	163 V	65 W	73 W	323 mA	90 °C	-40 ... +70 °C	short circuit (0 Ω)

[Ⓢ] Depending on the selected output current.

[Ⓢ] At full load.

Product description

- Ready-for-use resistor to set output current value
- Compatible with LED Driver series TOP and ECO
- Resistor is base isolated
- Resistor power 0.25 W
- Resistor value tolerance $\pm 1\%$

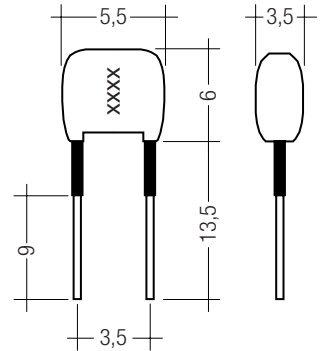

Ordering data

Type	Article number	Colour	Marking	Resistor value	Packaging bag	Weight per pc.
I-SELECT PLUG 175mA BL	28000446	Blue	0175	63.40 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 200mA BL	28000447	Blue	0200	54.90 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 225mA BL	28000448	Blue	0225	47.50 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 250mA BL	28000368	Blue	0250	40.20 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 275mA BL	28000369	Blue	0275	34.00 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 300mA BL	28000275	Blue	0300	27.40 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 325mA BL	28000449	Blue	0325	22.00 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 350mA BL	28000276	Blue	0350	12.00 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG 375mA BL	28000450	Blue	0375	6.19 k Ω	10 pc(s).	0.001 kg
I-SELECT PLUG MAX GR	28000274	Grey	MAX	0 Ω	10 pc(s).	0.001 kg

Standards

EN 55015
 EN 60068-2-27 (shock – test case: 1,000 shocks in 6 directions with 30 g / 18 ms)
 EN 60068-2-64 (vibration – test case: acc. to table A.1 transport / category 2)
 EN 61000-3-2
 EN 61000-3-3
 EN 61347-1
 EN 61347-2-13
 EN 62384
 EN 61547
 According to EN 50172 for use in central battery systems
 According to EN 60598-2-22 suitable for emergency lighting installations

Overload protection

If the output voltage range is exceeded the LED Driver turns off the LED output. After restart of the LED Driver the output will be activated again.

Overtemperature protection

The LED Driver is protected against temporary thermal overheating. If the temperature limit is exceeded the output current of the LED is reduced. The temperature protection is activated approx. +5 °C above t_c max (see page 2). On DC operation this function is deactivated to fulfill emergency requirements.

Short-circuit behaviour

In case of a short circuit at the LED output the LED output is switched off. After restart of the LED Driver the output will be activated again.

No-load operation

The LED Driver will not be damaged in the no-load operation. The output will be deactivated and therefore free of voltage. If a LED load is connected the device has to be restarted before the output will be activated again.

DC emergency operation

The LED Driver is designed for operation on DC voltage and pulsed DC voltage.

Light output level in DC operation: 15 %

The voltage-dependent input current of Driver incl. LED module is depending on the used load.

The voltage-dependent no-load current of Driver (without or defect LED module) is for:

AC: 46 mA
 DC: 5 mA

Output current setting

Output current can be set by connecting a resistor between the 2 "I sel" terminals. Relationship between output current and resistor value can be found at the table "Specific technical data". Resistor values specified from standardised resistor value ranges.

Resistor value tolerance has to be $\leq 1 \%$.

Resistor power has to be $\geq 0.1 \text{ W}$.

If the resistor is connected with wires a max. wire length of 2 m may not be exceeded and possible interferences have to be avoided.

Resistor detection at each start.

Change of the resistor value during the operation will be not considered.

Resistors for the main output current values can be ordered from Tridonic (see accessories).

Intelligent temperature monitoring (ITM)

The device offers the possibility to connect a silicium based temperature sensor (KTY81-210, KTY82-210) to monitor the LED temperature and protect the module against thermal damages.

If the temperature limit is exceeded the LED output will be dimmed or turned off.

If the temperature falls below threshold the device will automatically return to the nominal operation.

The use of a NTC or PTC resistor is not possible.

The device can be operated without a sensor (default setting).

Conditions of use and storage

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (t_a) before they can be operated.

Expected life-time

Type	Output current	t_a	40 °C	50 °C	55 °C	60 °C	65 °C	70 °C	75 °C
LCI 65W 150mA-400mA TOP INDUSTRY sl	< 250 mA	t_c	55 °C	65 °C	70 °C	75 °C	80 °C	85 °C	90 °C
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	> 100,000 h	> 100,000 h	77,000 h	55,000 h
	250 – 400 mA	t_c	60 °C	70 °C	75 °C	80 °C	85 °C	90 °C	x
		Life-time	> 100,000 h	> 100,000 h	> 100,000 h	> 100,000 h	94,000 h	67,000 h	x

The LED Driver is designed for a life-time stated above under reference conditions and with a failure probability of less than 10 %.

Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current
Installation \emptyset	1.5 mm ²	1.5 mm ²	2.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	2.5 mm ²	I_{max} time
LCI 65W 150mA-400mA TOP INDUSTRY sl	14	20	24	32	7	10	12	16	40 A 200 μ s

Harmonic distortion in the mains supply (at 230 V / 50 Hz and full load) in %

	THD	3.	5.	7.	9.	11.
LCI 65W 150mA-400mA TOP INDUSTRY sl	5.3	5.3	< 1	< 1	< 1	< 1

Electrical connections

Wiring

LED module/LED Driver/supply



IDC interface

- solid wire with a cross section of 0.5 mm²

Horizontal interface

- solid wire with a cross section of 0.5–0.75 mm² with an insulation diameter up to 2.5 mm
- strip 8–9 mm of insulation from the cables to ensure perfect operation of the push terminals
- Loosen wire through twisting and pulling

wire preparation:
0.5 – 0.75 mm²



Loosen wire through
twisting and pulling

Wiring guidelines

- The cables should be run separately from the mains connections and mains cables to ensure good EMC conditions.
- The LED wiring should be kept as short as possible to ensure good EMC. The max. secondary cable length is 2 m (4 m circuit), this applies for LED output as well as for I-select.
- Secondary switching is not permitted.
- The LED Driver has no inverse-polarity protection on the secondary side. Wrong polarity can damage LED modules with no inverse-polarity protection.

Earth connection


The earth connection is conducted as protection earth (PE). The LED Driver can be earthed via earth terminal or metal housing. If the LED Driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED Driver.

Earth connection is recommended to improve following behaviour.

- Electromagnetic interferences (EMI)
- Transmission of mains transients to the LED output

In general it is recommended to earth the LED Driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.

Circuit diagram

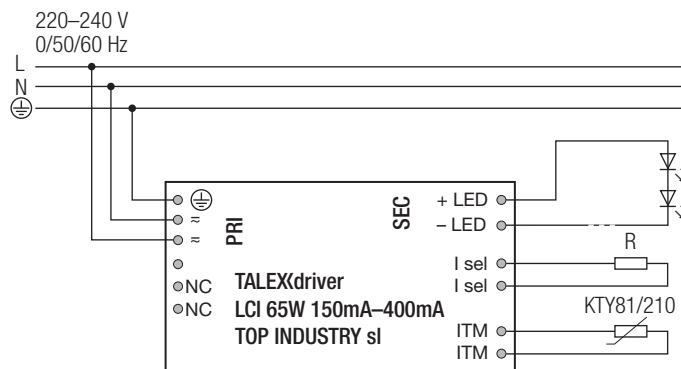

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Additional information


Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services


Life-time declarations are informative and represent no warranty claim. No warranty if device was opened.

Diagrams LCI 65W 150mA-400mA TOP INDUSTRY sl


Efficiency vs load

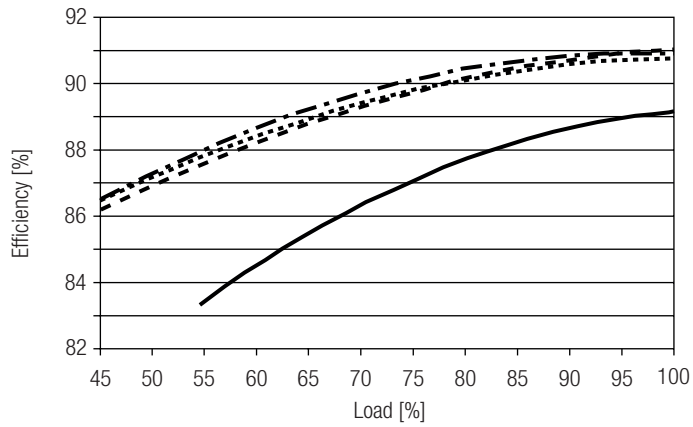


Power factor vs load

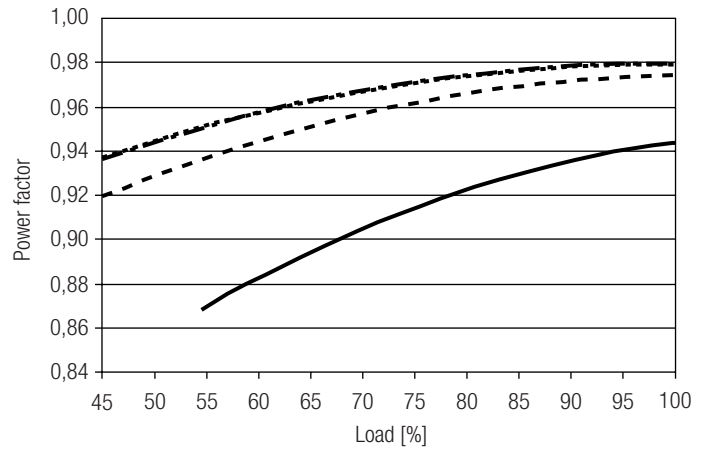


Input power vs load

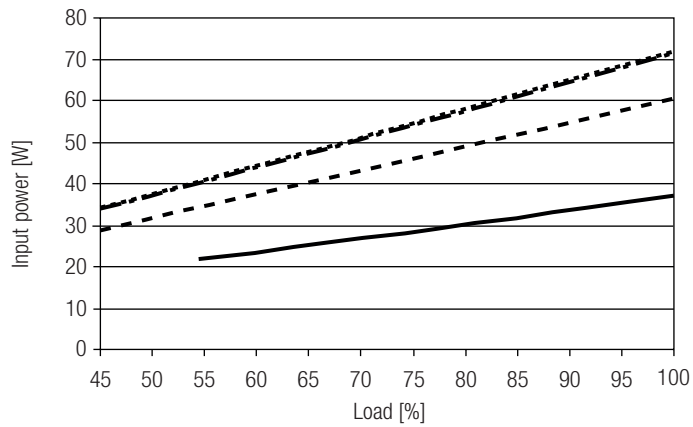

Input current vs load

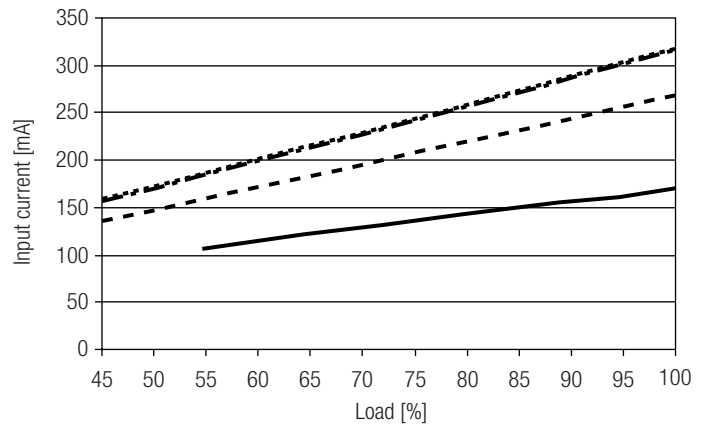

THD vs load

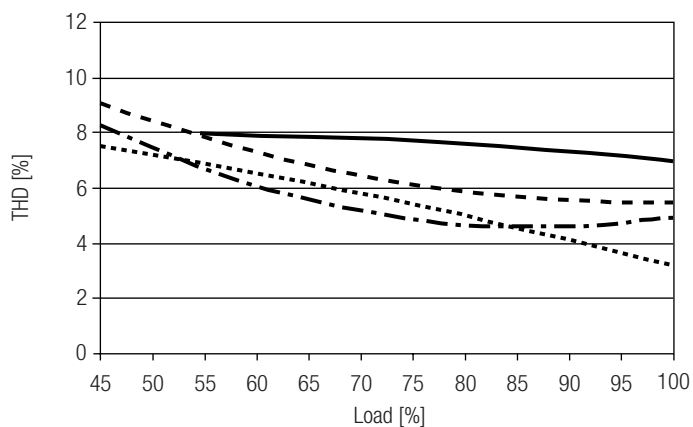

- 150 mA
- - - 250 mA
- · - · 350 mA
- · · · 400 mA