


## Installation manual

# Poker

230V/50HZ


### 1. Dimensions and weight

Power [W]	L	A	Weight
1x18	618	486	1,01 kg
1x30	923	791	1,27 kg
1x36	1228	1096	1,45 kg
1x58	1528	1396	2 kg
1x14/24	577	496	0,7 kg
1x21/39	877	796	0,9 kg
1x28/54	1177	1096	1,1 kg
1x35/49/80	1477	1396	1,2 kg
2x18	618	486	1,01 kg
2x30	923	791	1,27 kg
2x36	1228	1096	1,45 kg
2x58	1528	1396	2 kg
2x14/24	577	496	0,8 kg
2x21/39	877	796	1,5 kg
2x28/54	1177	1096	1,9 kg
2x35/49/80	1477	1396	2,7 kg

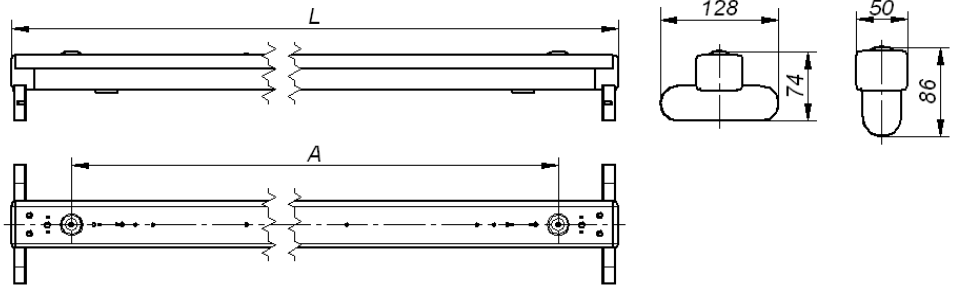

### 2. Assembly

- carefully take the luminaire out of box and put it on a stable surface;
- take off the housing protection;
- install the luminaire on to the ceiling according to dimensions shown on a picture above;
- power supply connection:
  - pull the feeding cable through the hole in the back of a fixture;
  - connect the wires as shown on a cube;
- put the housing protection on and electrically ground it with a grounding wire;
- put the lamps of proper power into the sockets and turn them by 90°

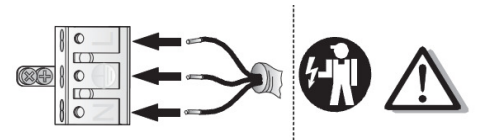

#### Important warnings:

Do not install the luminaires in areas without an exchange of air.

The manufacturer cannot be considered liable for any damages deriving from improper, wrong and unreasonable use of the fitting.

Luminaries may be installed by qualified personnel only.

Any manipulation inside the luminaire when power supply is on causes the risk of electric shock.

Manufacturer is not responsible for any flaws resulting from not complying with recommendations included in this instruction manual.

Manufacturer reserves a right to change the construction of the product.

The European Directive 2002/96/EC on waste electrical and electronic equipment, requires that electric and electronic devices must be disposed of in the normal household waste. The crossed out wheeled bin is reproduced in order to remember obligations towards separately collection. For correct disposal, please use authorized waste disposal facilities or returned to the distributor at the date a new lighting fitting is purchased. Lamps, if disposed together with the lighting fitting, shall not be broken up since they contain substances which are highly polluting for the environment. Unauthorized disposal of the foregoing waste material is punishable by law.

