

L 30 W/76

Kod produktu: 56233



Dane techniczne:

- Construction wattage [PICOS] **30.00 W**
- Nominal wattage **30.00 W**
- Length **895.0 mm**
- Energy consumption **37 kWh/1000h**
- Luminous flux at 25 °C **1300 lm**
- Service life **18000 h**
- Length with base excl. base pins/connection **895.00 mm**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Light color as per EN 12464-1 **NATURA**
- Light color **76**
- Color coordinates chromaticity diagram **0.379/0.314**
- Diameter **26.0 mm**
- Tube diameter **26 mm**
- Nominal lamp life time **20000 h**
- Rated lamp life time **20000 h**
- Lifespan **20000 h**
- Base (standard designation) **G13**
- Appropriate disposal acc. to WEEE **Yes**
- Lamp mercury content **4.5 mg**
- Energy efficiency class **B**

Product benefits

- Specially tailored spectral distribution
- Food looks fresh and appetizing without unduly "beautifying" it

Areas of application




- Bakeries, meat processors, butchers
- Shops
- Supermarkets and department stores
- Especially suitable for the food sector (DIN 10504)

Product features

- Average lifetime: 20,000 h with preheat ECG

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

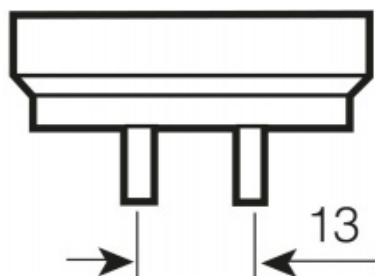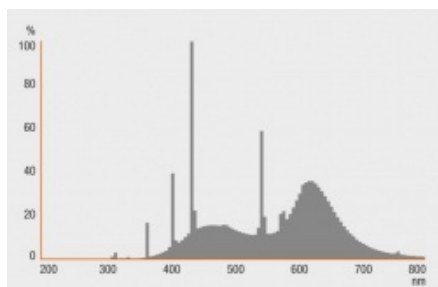

G13
IEC 7004-51
DIN 49653 T1

