

PLANTASTAR 250 W E40

Kod produktu: 57003



Dane techniczne:

- Nominal voltage **100 V**
- Nominal wattage **250.00 W**
- Color temperature **2000 K**
- Diameter **47.0 mm**
- Length **257.0 mm**
- Base (standard designation) **E40**
- Dimmable **No**
- Color rendering index Ra **20**
- Lamp mercury content **24.0 mg**
- ILCOS **ST-250-H/E-E40-47/257**
- Product weight **148.00 g**
- Design / version **Clear**
- Light center length (LCL) **158.0 mm**
- Burning position **Any**
- Lamp current **2.95000 A**
- Ignition voltage **4.0 / 5.0 kVp**
- Maximum permitted outer bulb temperature **400 °C**
- Lifespan B50 **32000 h**
- Enclosed luminaire required **No**
- Maximum permitted base edge temperature **250 °C**
- Lifespan B10 **24000 h**
- Lifespan B5 **20000 h**
- Photon flux **420 µmol/s**
- Photon flux efficacy **1.6 µmol/s/W**
- Rated wattage **255.00 W**
- Ignition voltage **4.0 / 5.0 kVp**
- Color temperature **2000 K**
- Diameter **47.0 mm**
- Length **285.0 mm**
- Light center length (LCL) **175.0 mm**
- Base (standard designation) **E40**
- Design / version **Clear**
- Dimmable **No**
- Burning position **Any**
- Enclosed luminaire required **No**

- Maximum permitted base edge temperature **250 °C**

Product benefits



- Shorter production times
- Control over blossoming


Areas of application

- Greenhouses
- Suitable for growth of fruit due to emission of photosynthesis optimised light
- Outdoor applications only in suitable luminaires

Product features

- Average lifetime: 12,000 hours
- Provides light for the photosynthesis in plants
- Photon flux: > 90 % after 12,000 hours
- High-pressure sodium lamp especially for greenhouse lighting

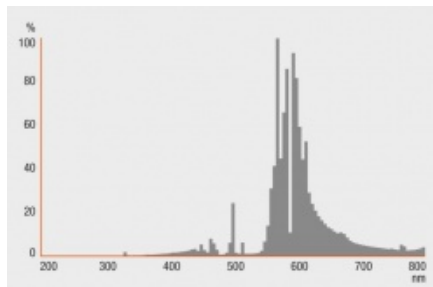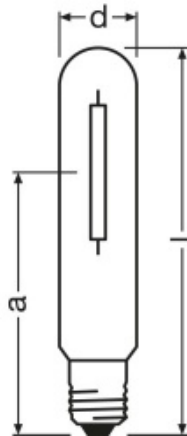



E40
IEC 7004-24
DIN 49625