




Modena Mini LED



Modern plafond Modena Mini is an extension of Modena family of luminaires. Highly aesthetic and characteristic for great parameters: resistance to external conditions and UV rays with IP54 degree of protection. Available with AW 3H emergency module. Possibility of application of motion sensor or day light sensor.

Materials: white version: base and diffuser made of white UV proof polycarbonate, grey version: grey base and white diffuser made of UV proof polycarbonate

Installation: ceiling mounted, wall mounted

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Ignitor/starter	Not required
Voltage rating	230 V
Light source included	Yes
Type of LED	LG6030
SELV	Yes

MECHANICAL DATA

Type of installation	Surface mounted
Housing material	Polycarbonate

MATERIALS

CERTIFICATES

Degree of protection (IP)	IP54
Impact resistance	IK10
Class of protection	I
Light source protection	Yes
Energy class	A+
CE	Yes


LIGHT DATA

Light color	White
Light distribution	Wide beam
Light distribution	DI
Class of luminaire	I

OPTICAL DATA

Louver/shutter	OPAL
Diffuser color	White
Diffuser material	Opal/mat plastic

Product code	Light source power [W]	Luminarie luminous flux [lm]	Luminarie luminous efficacy [lm/W]	Color temperature [K]	Color	Info	Weight [kg]
PX3004064	1×20	1237	62	3000	White	-	1.3
PX3004071	1×20	1275	64	4000	White	-	1.3
PX3004078	1×20	1237	62	3000	White	AW 3H	2.0
PX3004085	1×20	1275	64	4000	White	AW 3H	2.0
PX3005164	1×20	1237	62	3000	Grey	-	1.3
PX3005171	1×20	1275	64	4000	Grey	-	1.3
PX3005178	1×20	1237	62	3000	Grey	AW 3H	2.0
PX3005185	1×20	1275	64	4000	Grey	AW 3H	2.0
PX3004060	1×10	483	48	3000	White	-	2.0
PX3004063	1×10	533	53	4000	White	-	2.0
PX3005160	1×10	483	48	3000	Grey	-	2.0
PX3005163	1×10	533	53	4000	Grey	-	2.0

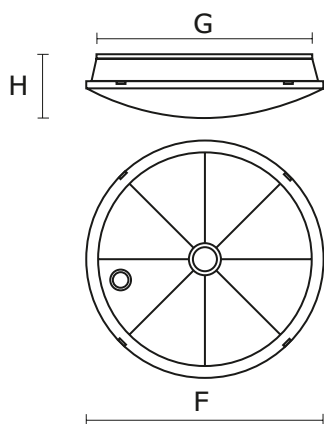

DIMENSIONS

H [mm]	F [mm]
--------	--------

90	315
----	-----

H = Height / Depth | F = Outer diameter