

DULUX S/E 7 W/827

Kod produktu: 56807



Dane techniczne:

- Nominal wattage **6.50 W**
- Color temperature **2700 K**
- Nominal luminous flux **400 lm**
- Rated luminous flux **402 lm**
- Light color as per EN 12464-1 **LUMILUX INTERNA**
- Overall length **114.0 mm**
- Length **114.0 mm**
- Nominal lamp life time **20000 h**
- Rated lamp life time **20000 h**
- Base (standard designation) **2G7**
- Appropriate disposal acc. to WEEE **Yes**
- Energy efficiency class **A**
- Color rendering index Ra **80**±89
- Lamp mercury content **1.4 mg**
- Energy consumption **8 kWh/1000h**
- ILCOS **FSDH-7/827-/P/-2G7**
- Product weight **22.00 g**
- Tube diameter **12 mm**
- Lifespan **20000 h**
- Product remark **For ECG operation only**
- Light color **827**
- Color rendering group **1B**
- Luminous flux at 25 °C **400 lm**
- Rated LLMF at 4,000 h **0.86**
- Rated LLMF at 6,000 h **0.84**
- Rated LLMF at 8,000 h **0.82**
- Length acc. to IEC standard **115 mm**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.99**
- Rated lamp survival factor at 6,000 h **0.99**
- Service life **13000 h**
- Operation mode LLMF/LSF **HF**
- Rated lamp survival factor at 8,000 h **0.99**
- Suitable for indoor **Yes**
- Rated LLMF at 12,000 h **0.79**

- Rated lamp survival factor at 12,000 h **0.95**
- Luminance **2.6 cd/cm²**
- Rated ambient temp.w.max.luminous flux **25.0 °C**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Rated LLMF at 16,000 h **0.78**
- Rated LLMF at 20,000 h **0.76**
- Rated lamp survival factor at 16,000 h **0.81**
- Rated lamp survival factor at 20,000 h **0.50**
- Rated wattage **6.50 W**
- Rated lamp efficacy (HF data 25 °C) **Under clarification by authority and standardization body**
- Color rendering index Ra **80**
- Color rendering group **1B**
- Rated LLMF at 4,000 h **0.86**
- Rated LLMF at 6,000 h **0.84**
- Rated LLMF at 8,000 h **0.82**
- Rated LLMF at 12,000 h **0.79**
- Rated LLMF at 16,000 h **0.78**
- Rated LLMF at 20,000 h **0.76**
- Tube diameter **12 mm**
- Nominal lamp life time **20000 h**
- Rated lamp life time **20000 h**
- Lifespan **20000 h**
- Rated lamp survival factor at 2,000 h **0.99**
- Rated lamp survival factor at 4,000 h **0.99**
- Service life **13000 h**
- Operation mode LLMF/LSF **HF**
- Rated lamp survival factor at 8,000 h **0.99**
- Rated lamp survival factor at 12,000 h **0.95**
- Rated lamp survival factor at 16,000 h **0.81**
- Rated lamp survival factor at 20,000 h **0.50**
- Base (standard designation) **2G7**
- Appropriate disposal acc. to WEEE **Yes**
- Lamp mercury content **1.4 mg**
- Product remark **For ECG operation only**
- Suitable for indoor **Yes**
- Energy efficiency class **A**
- Rated ambient temp.w.max.luminous flux **25.0 °C**

Product benefits

- Extremely economical
- Good quality of light
- Improved maintenance
- Low power consumption (7 W, 9 W, 11 W)
- Long service life
- Extremely low profile

Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants

Product features



- Average life: 20,000 h (with QUICKTRONIC)
- Color rendering index Ra: 80...89
- Dimmable (3...100 %)
- Short and compact pin-base lamps with single-turn tubes
- Single-ended four-pin plug-in 2G7 base
- Operates on battery, solar and AC power with suitable electronic control gear


Equipment / Accessories

- Suitable for operation on electronic control gear

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

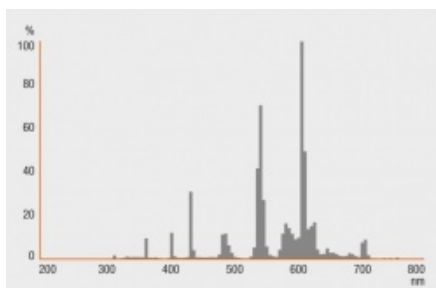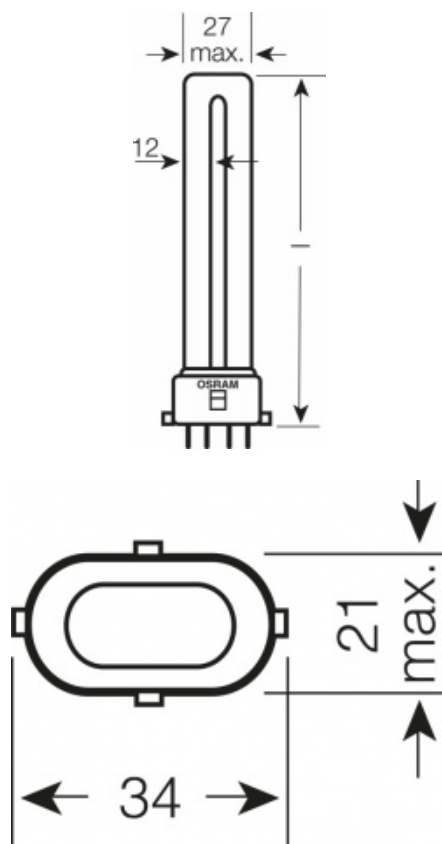

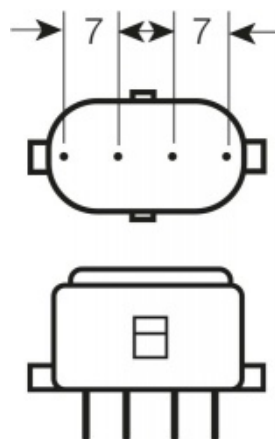

OSRAM DULUX® D / KVG und OSRAM DULUX® D/E / QUICKTRONIC®

