



Cronus



Oprawa ewakuacyjna i ewakuacyjno - sieciowa na świetlówki lub diody LED.

Materials: plastic housing (standard color: white), polycarbonate diffuser

Installation: wall mounted, ceiling mounted, recessed

Accessories: vertical diffuser, recessed housing, protective grid, "EMERGENCY EXIT" pictogram, "EXIT" pictogram (for 8W version)

Power: 230 V

ELECTRICAL DATA

Number of light sources	1
Voltage rating	230 V
Light source included	Yes

MECHANICAL DATA

Type of installation	Universal mounting
Housing material	Plastic

INFROMATIONS

Color	White
-------	-------

CERTIFICATES

Degree of protection (IP)	IP42
Class of protection	II
Light source protection	Yes
CE	Yes

LIGHT DATA


Light distribution	DI
--------------------	----

OPTICAL DATA

Louver/shutter	Transparent plastic
Diffuser color	None
Diffuser material	Transparent plastic
Reflector	None

MATERIALS

Product code	Light source	Lamp holder	Light source power [W]	Type of equipment	Emergency [h]	Info	CNBOP
MNEL6	T5	G5	1×6	EVG	1.5	NM	No
MNEL6-3H	T5	G5	1×6	EVG	3.0	NM	No
MNLEDUS8	LED	-	1×1	AC	2.0	NM/M	Yes
MNLEDUS8-3H	LED	-	1×1	AC	3.0	NM	Yes
MNEL8	T5	G5	1×8	EVG	1.5	NM	Yes
MNEL8-3H	T5	G5	1×8	EVG	3.0	NM	Yes
MNEL8M	T5	G5	1×8	EVG	1.5	M	Yes
MNEL8M-3H	T5	G5	1×8	EVG	3.0	M	Yes
MNEL8MAINS	T5	G5	1×8	EVG	1.5	MAINS	No
MNEL8-AUT	T5	G5	1×8	EVG	1.0	NM	No
MNEL8M-AUT	T5	G5	1×8	EVG	1.0	M	No
MNLEDUS16	LED	-	1×2	AC	2.0	NM/M	Yes

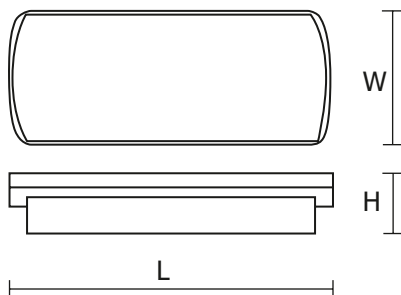

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
MNEL6	260	98	45
MNEL6-3H	260	98	45
MNLEDUS8	260	98	45
MNLEDUS8-3H	260	98	45
MNEL8	345	133	63
MNEL8-3H	345	133	63
MNEL8M	345	133	63
MNEL8M-3H	345	133	63
MNEL8MAINS	345	133	63
MNEL8-AUT	345	133	63
MNEL8M-AUT	345	133	63
MNLEDUS16	345	133	63

L = Length | W = Width | H = Height / Depth

ACCESSORIES

Diffusers



Cronus 6W Vertical diffuser



Star/Cronus/Sirios Protective grid 390x205x61mm



Cronus 8W Vertical diffuser

Installation elements



Cronus 6W Recessed housing



Cronus 8W Recessed housing